



Aluminum LED Profile

2025-2026

LEDLUZ's Aluminum led profiles are the excellent option to take your led light strip installation to the next level. LEDLUZ offers a wide range of aluminum extrusion profiles, which enables architects, interior designers, retailers and home improvement contractors to create amazing lighting project. We have more than 400 kinds of aluminum led profile for your choice at present. And we prepare a lot of stock in warehouse, then we can make fast delivery within short time. Normally our stock is in 2m each pcs, for some popular items in 2.5m. But we will custom made the length for your project if you need.

Our main feature is that we design and we manufacture, our R&D team study the cutting-edge industry and then transform them to products.

We can design according to clients' requirements and we manufacture by using technical know-how to control the cost.

LEDLUZ offers its partner with European quality products, but with Chinese manufacturing price.



◆ Main components of Aluminum led profile lighting system:

- 1) Flexible LED strips or Rigid LED light bar
- 2) Aircraft Aluminum led profile(6063-T5)
- 3) PMMA cover (polymethyl methacrylate) or PC cover (polycarbonate)
- 4) LED driver

◆ Application of Aluminum LED Profile

- 1) Main Lighting, such as in office, supermarket, shopping mall and factory etc.
- 2) Backlight or supplementary Lighting
- 3) Lighting for special occasions
- 4) Also suitable for residential decoration Lighting

◆ Advantages of Aluminum LED Profile Lighting


Simple and fashion design
Easy installation, can be cut according to any length which you need
Low operating voltage, very safe, eco-friendly and energy efficiency

◆ LEDLUZ's advantage on the LED Profile

- 1), Stock for each item at any time
- 2), Free sample, NO MOQ problem
- 3), Constant improvement to the old items, and also design the new models
- 4), Custom made the length and color for the Aluminum, also supply special packing But with MOQ



China National High-tech Enterprise

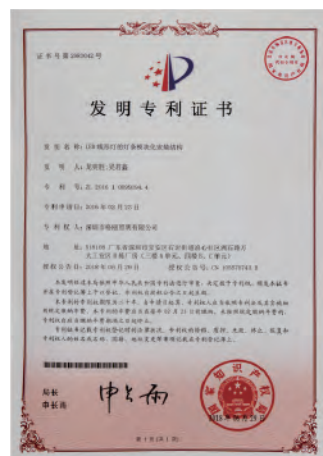

Patents



Patents




Product certificates




Aluminium Ingot



Moulding Workshop



Oxidation Pool

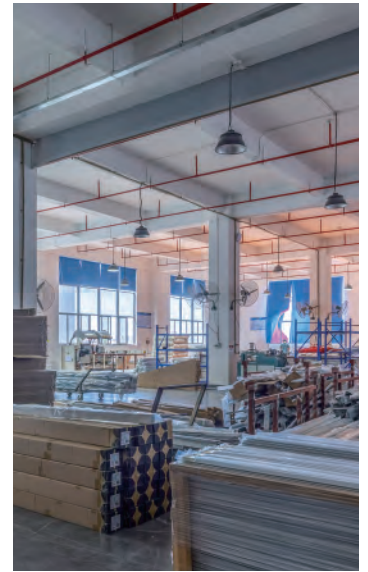

Aluminium Extrusion Workshop




Plastic Extrusion Machine



Plastic Extrusion Production




Warehouse



Warehouse 2



Cutting machine



Finished Products Assembly




Quality Control




Special Packing




Integrating Sphere



Other Testing Instruments

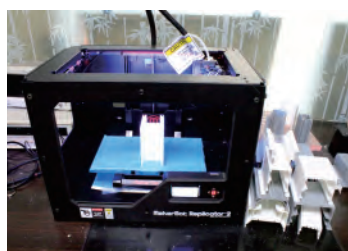

3D Printer

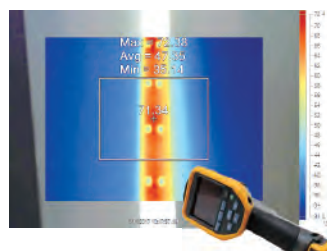


































FLUKE Tis20 Thermal Imager



Goniophotometer

ALP001-R	P01	ALP002-R	P02	ALP002-RL	P03	ALP002-R2	P04	ALP002-M	P04
ALP003-R	P05	ALP004-R	P06	ALP004-RL	P07	ALP005	P08	ALP006	P09
ALP007-R	P10	ALP008	P11	ALP010	P12	ALP011	P13	ALP012	P13
ALP013	P14	ALP013-R	P14	ALP014	P15	ALP014-R	P15	ALP015-R	P16
ALP016-R	P16	ALP027	P17	ALP028	P17	ALP029	P18	ALP031	P19
ALP032	P20	ALP021	P21	ALP077	P22	ALP043	P23	ALP044	P23
ALP044-PC-R1	P24	ALP025	P25	ALP026	P25	ALP073	P26	ALP116	P27

ALP117	P27	ALP119	P28	ALP035-R	P29	ALP035-RL	P29	ALP114	P30
ALP140	P31	ALP099	P32	ALP100	P32	ALP039	P33	ALP039-30	P33
ALP039-60	P34	ALP039-90	P34	ALP040	P35	ALP040-30	P35	ALP040-60	P36
ALP040-90	P36	ALP134	P37	ALP135	P37	ALP136	P38	ALP137	P38
ALP202	P39	ALP203	P40	ALP138	P41	ALP139	P41	ALP109-R	P42
ALP109-RD	P43	ALP104-R	P44	ALP105-R	P45	ALP106-R	P46	ALP107-R	P47
ALP108-R	P48	ALP017-R5	P49	ALP018-R3	P50	ALP045-R	P51	ALP046-R	P52

ALP047-R1	P53	ALP048-R1	P54	ALP6535	P55	ALP5035	P56	ALP019-R	P57
									
ALP049-R	P58	ALP050	P59	ALP062	P60	ALP169	P61	ALP170	P62
									
ALP195	P63	ALP196	P64	ALP200	P65	ALP201	P66	ALP3030	P67
									
ALP3030-T	P68	ALP6060-R	P69	ALP6060-R1	P70	ALP051	P71	ALP3880	P71
									
ALP053-R	P72	ALP054-R1	P72	ALP056-R	P73	ALP056-DR	P74	ALP052	P75
									
ALP057	P76	ALP3875-R	P77	ALP5075-R	P78	ALP5075-R1	P79	ALP5075-C	P80
									
ALP6545-C	P81	ALP7575-R	P82	ALP6875	P83	ALP9575-R	P84	ALP5090	P85
									

ALP38115

P86



ALP50120

P87




ALP63120

P88




ALP75120

P89




ALP7578

P90




ALP10078

P91




ALP6380

P92




ALP6380-T

P93




ALP6390

P94




ALP065

P95




ALP065-T

P95



ALP066

P96




ALP023-R2

P97




ALP024

P98




ALP024-R

P99




ALP024-R1

P100




ALP184-9

P101




ALP184-11

P101




SK1580

P102



SK1580-TR

P103



SK1580-R

P104




SK1270

P105




ALP033

P106




ALP034

P106




ALP130

P107




ALP131

P107




ALP132

P108




ALP133

P108




ALP204

P109




ALP207

P110




ALP208

P111




ALP209

P112




ALP143

P113




ALP144


































P114



ALP145

P115































ALP146 	P116	ALP147 	P117	ALP148 	P117	ALP149 	P118	ALP150 	P118
ALP151 	P119	ALP152 	P120	ALP155 	P121	ALP156 	P122	ALP157 	P123
ALP158 	P124	ALP159 	P125	ALP159-TR 	P126	ALP159-TR1 	P127	ALP159-TR2 	P127
ALP160 	P128	ALP161 	P129	ALP162 	P130	ALP163 	P131	ALP164 	P132
ALP165 	P133	ALP166 	P134	ALP167 	P134	ALP168 	P135	ALP213-RC 	P136
ALP215-RC 	P137	ALP217-RC 	P138	ALP232-C 	P139	ALP233-C 	P140	ALP234-C 	P141
ALP235-C 	P142	ALP237-C 	P143	ALP238-C 	P144	ALP171 	P145	ALP172 	P146

ALP173	P147	ALP174	P148	ALP175	P149	ALP176-R	P150	ALP177	P151
ALP129	P152	ALP129-I	P153	ALP129-O	P153	ALP068-R	P154	ALP069-R	P154
ALP070-R	P155	ALP070-V	P155	ALP068-R2	P156	ALP068-S	P157	ALP068-SR1	P157
ALP068-R3	P158	ALP068-R4	P158	ALP071	P159	ALP071-S	P160	ALP079	P161
ALP080-R	P162	ALP081-R	P163	ALP083-R	P164	ALP082	P165	ALP186	P166
ALP085	P167	ALP086	P168	ALP087	P169	ALP088	P169	ALP089	P170
ALP092	P171	ALP093	P171	ALP094	P172	ALP095	P172	ALP110-S	P173


ALP110-R P173	ALP111-S P174	ALP111-R P174	ALP090 P175	ALP091 P176
ALP091-E P177	ALP193 P178	ALP198 P179	ALP199 P180	ALP205 P181
ALP206 P182	ALP084-S P183	ALP084-R P184	ALP185 P185	ALP187 P186
ALP210 P187	ALP059-TR P188	ALP078 P189	ALP078-R P189	ALP126 P190
ALP127 P191	ALP128 P192	ALP127-R P193	ALP128-R P194	ALP188 P195
ALP189 P196	ALP194 P197	ALP197 P198	ALP190 P199	ALP191 P200
ALP192 P201	ALP141 P202	ALP142 P203	ALP218 P204	ALP227 P205

ALP228 P206	ALP229 P207	ALP225 P208	ALP226 P209	MAG2425-R P210
MAG3425 P211	MAG6425 P212	MAG2430 P213	MAG2475 P214	MAG2490 P215
MAG7850 P216	LS30 P217	LS30-T P219	LS30-TS P220	LS40 P221
LS40-S P223	LS40-T P224	LS40-TS P224	LS50 P225	LS50-T P226
LS50-TS P227	LS50-T1 P228	LS50-U P228	LS50-LPC P229	ALP4070 P231
ALP4070-UP P232	ALP4035-T P233	ALP4660 P234	ALP4678 P235	ALP4678-TK P236
ALP5078 P237	ALP182 P238	ALP183 P239	ALP5580 P240	ALP5580-T P241

T30 	P242	T36 	P243	T40 	P244	T60 	P245	T100 	P246
ALP1628 	P247	ALP2617C 	P249	ALP14C 	P252	ALP25C-R 	P253	ALP3050C 	P254
ALP30C 	P255	ALP30CO 	P256	ALP50C 	P257	Round aluminum lighting RAL410:27W/2700lm 	P258	S1018-S 	P259
S1616-T 	P259	S11616-S 	P260	S1616-C 	P260	S0410-S 	P261	S0612-S 	P261
S1010-T 	P262	S3021-T 	P262	S1616-3D 	P263	S18 	P264	S20 	P265
ALP1202 	P266	ALP209 	P266	ALP143 	P266	RDB01 	P267	RDB02 	P267
RDB03 	P267	Canopy 	P267						



ALP001-R

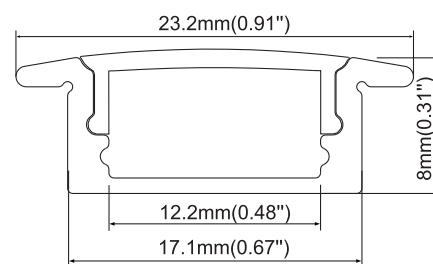

Types of installation:



Material: Extruded aluminum


Dimension: 23.5×8mm

Length: MAX 5m


ACCESSORIES



Plastic end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



Black PC frosted cover



FINISH



Anod. aluminum




white



Black




Types of installation:



Material: Extruded aluminum
Dimension: 17.1×8mm
Length: MAX 5m

ALP002-R

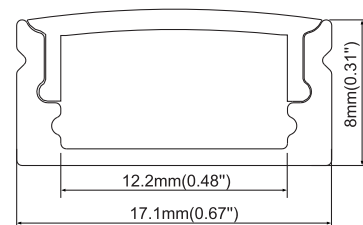

ACCESSORIES



Plastic end cap
with hole/without hole




FINISH




Anod. aluminum

white

Black



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



Black PC frosted cover



Mounting clip(metal)
Mounting clip (PC)
Adjustable bracket



90° Connector
180° Connector



ALP002-RL




Types of installation:



Material: Extruded aluminum

Dimension: 17.1×13.4mm

Length: MAX 5m

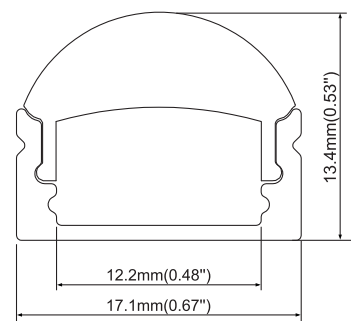

FINISH



Anod. aluminum


white

Black


ACCESSORIES




Plastic end cap
with hole/without hole



PC opal matte cover
PC semi-clear cover



PC clear lens (30°)



180° Connector
Adjustable bracket
Mounting clip (PC)
Mounting clip(metal)




Types of installation:



Material: Extruded aluminum
Dimension: 17.1×13.9mm
Length: MAX 5m

ALP002-R2

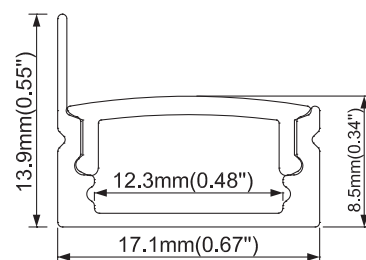

ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover



IP20



FINISH




Anod. aluminum



white



Black



Mounting clip (PC)
Mounting clip (metal)




Types of installation:



Material: Extruded aluminum
Dimension: 12.9×7mm
Length: MAX 5m

ALP002-M



ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover



IP20



FINISH




Anod. aluminum



white




Black



Mounting clip (metal)



ALP003-R

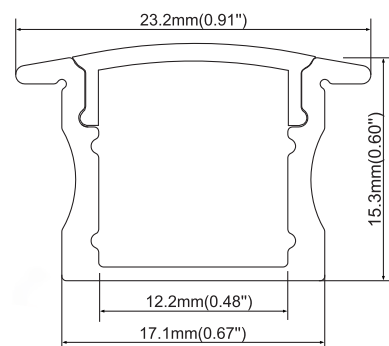

Types of installation:



Material: Extruded aluminum


Dimension: 23.2×15.3mm

Length: MAX 5m


ACCESSORIES



Plastic end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



Black PC frosted cover



FINISH



Anod. aluminum

white

Black




Types of installation:



Material: Extruded aluminum
Dimension: 17.1×15.3mm
Length: MAX 5m

ALP004-R




ACCESSORIES




Plastic end cap
with hole/without hole




FINISH



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



Black PC frosted cover




Mounting clip(metal)
Mounting clip(PC)
Adjustable bracket



90° Connector
180° Connector

ALP004-RL



Types of installation:




Material: Extruded aluminum
Dimension: 17.1×20mm
Length: MAX 5m


ACCESSORIES




Plastic end cap
with hole/without hole

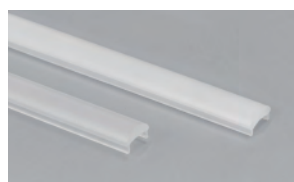

PC opal matte cover
PC semi-clear cover

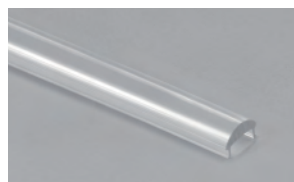

PC clear lens (15°)

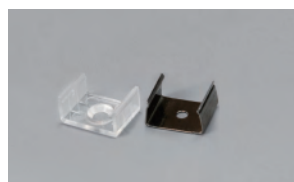

Mounting clip (PC)
Mounting clip(metal)



IP20



FINISH



Anod. aluminum



white




Black



180° Connector



ALP005



Types of installation:



Material: Extruded aluminum
Dimension: 16×16mm
Length: MAX 5m

ACCESSORIES



Plastic end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PC diffused cover




Mounting clip (PC)
Mounting clip (metal)

FINISH



Anod. aluminum white Black

ALP006



Types of installation:




Material: Extruded aluminum
Dimension: 16×16mm
Length: MAX 5m


ACCESSORIES



Plastic end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PC diffused cover



Black PC frosted cover



FINISH



Anod. aluminum

white

Black



Mounting clip (PC)
Mounting clip (metal)

INSTALLATION STEPS



step 01




step 02




step 03



step 04

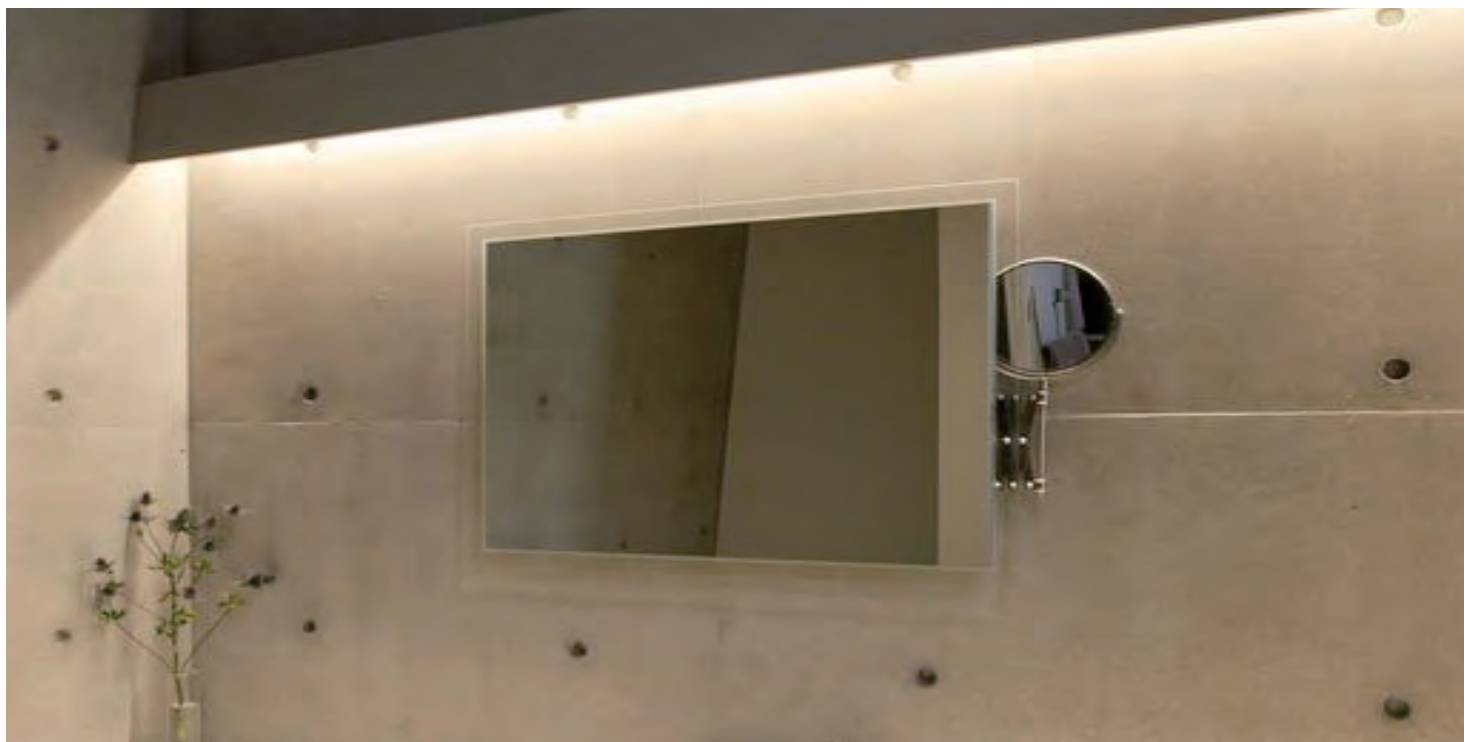

ALP007-R



Types of installation:



Material: Extruded aluminum

Dimension: 18.4×18.4mm

Length: MAX 5m




FINISH




ACCESSORIES



Plastic end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



Black PC frosted cover



Mounting clip (metal)
Mounting clip (PC)



ALP008

Types of installation:



Material: Extruded aluminum


Dimension: $\phi 20.8\text{mm}$

Length: MAX 5m

ACCESSORIES





Plastic end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PC diffused cover



Steel wire
Mounting clip (metal)



FINISH



Anod. aluminum




white



Black



ALP010



Types of installation:



Material: Extruded aluminum
Dimension: 19.6×20.1mm
Length: MAX 5m



FINISH




Anod. aluminum

ACCESSORIES



Plastic end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PC diffused cover



Types of installation:




Material: Extruded aluminum
Dimension: 19.6×20mm
Length: MAX 5m

ACCESSORIES




Plastic end cap
with hole/without hole



PC diffused cover
PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover

ALP011



FINISH



Anod. aluminum



Types of installation:



Material: Extruded aluminum
Dimension: 19.6×16mm
Length: MAX 5m

ACCESSORIES




Plastic end cap
with hole/without hole



PMMA clear lens (30°)
PMMA semi-clear lens

ALP012



FINISH



Anod. aluminum







ACCESSORIES



Plastic end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



Black PC frosted cover




Spring clip

Types of installation:



Material: Extruded aluminum
Dimension: 30.5×12.8mm
Length: MAX 5m

ALP013-R



FINISH



Anod. aluminum white Black




IP20




ACCESSORIES



Plastic end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover




Black PC frosted cover

Types of installation:



Material: Extruded aluminum
Dimension: 30.5×10mm
Length: MAX 5m

ALP013

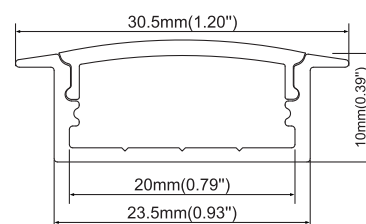

FINISH



Anod. aluminum white Black



IP20






Types of installation:



Material: Extruded aluminum
Dimension: 23.5×12.8mm
Length: MAX 5m

ALP014-R




FINISH




ACCESSORIES



Plastic end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



Black PC frosted cover



Adjustable bracket
Mounting clip (PC)
Mounting clip (metal)




Types of installation:



Material: Extruded aluminum
Dimension: 23.5×10mm
Length: MAX 5m

ALP014




FINISH




ACCESSORIES



Plastic end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



Black PC frosted cover



Adjustable bracket
Mounting clip (PC)
Mounting clip (metal)




Types of installation:



Material: Extruded aluminum
Dimension: 30×30mm
Length: MAX 5m

ALP015-R



ACCESSORIES



Plastic end cap
with hole/without hole



IP20



FINISH



Anod. aluminum



white



Black



PMMA opal matte cover
PMMA semi-clear cover
PC diffused cover
PMMA clear cover



Mounting clip (metal)




Types of installation:



Material: Extruded aluminum
Dimension: 30×30mm
Length: MAX 5m

ALP016-R



ACCESSORIES



Plastic end cap
with hole/without hole



IP20



FINISH




Anod. aluminum



white



Black



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



90° Joining connector
135° Joining connector
180° Joining connector
Mounting clip (metal)



ACCESSORIES



Plastic end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PC diffused cover




Steel wire
Mounting clip(metal)

Types of installation:



Material: Extruded aluminum
Dimension: 20.3×27mm
Length: MAX 5m

ALP027



FINISH



Anod. aluminum white Black



IP20




Types of installation:



Material: Extruded aluminum
Dimension: 20.3×27mm
Length: MAX 5m

ALP028



FINISH




Anod. aluminum white Black



IP20



ACCESSORIES



Plastic end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PC diffused cover




Steel wire
Mounting clip(metal)



ALP029



Types of installation:



Material: Extruded aluminum
Dimension: 20.3×36.5mm
Length: MAX 5m

ACCESSORIES



Aluminum end cap
without hole



IP20




FINISH



Anod. aluminum

white

Black



PC diffused cover



Steel wire
Mounting clip(metal)




Types of installation:



Material: Extruded aluminum
Dimension: 36×28mm
Length: MAX 5m


ALP031




ACCESSORIES



Plastic end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



Black PC frosted cover



Spring clip
180° Connector


FINISH



Anod. aluminum white Black



ALP032



Types of installation:




Material: Extruded aluminum


Dimension: 23.4×28mm

Length: MAX 5m


ACCESSORIES



Aluminum end cap
without hole



Black PC frosted cover



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover




Steel wire
Mounting clip (metal)
180° Connector

FINISH




Anod. aluminum white Black

ALP021

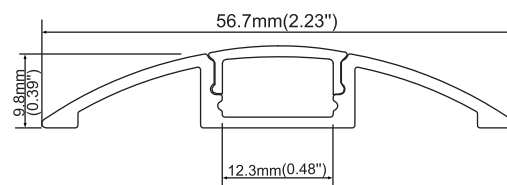

Types of installation:



Material: Extruded aluminum
Dimension: 56.7×9.8mm
Length: MAX 5m



IP20



FINISH



Anod. aluminum



white




Black


ACCESSORIES



Plastic end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



Black PC frosted cover

Types of installation:




Material: Extruded aluminum

Dimension: $\phi 33\text{mm}$

Length: MAX 5m



ALP077

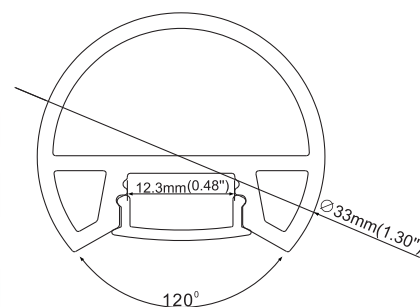

IP20



FINISH



Anod. aluminum



white




Black

ACCESSORIES



Aluminum end cap
with hole



PC diffused cover




Hanging clip

INSTALLATION STEPS



step 01




step 02



step 03



step 04

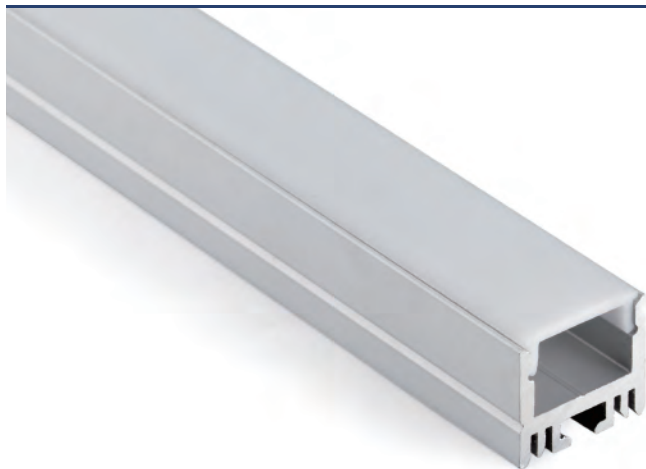

Types of installation:




Material: Extruded aluminum

Dimension: 17.1×15mm

Length: MAX 5m

ALP043



FINISH



Anod. aluminum


white

Black


ACCESSORIES



Plastic end cap
with hole/without hole



Black PC frosted cover



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



Mounting clip(metal)
Mounting clip (PC)
Adjustable bracket



Types of installation:




Material: Extruded aluminum

Dimension: 23.5×15mm

Length: MAX 5m

ALP044



FINISH



Anod. aluminum


white

Black


ACCESSORIES



Plastic end cap
with hole/without hole



Black PC frosted cover




PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover




Mounting clip(metal)

ALP044-PC-R1



Types of installation:



Material: Extruded aluminum

Dimension: 26×33mm

Length: MAX 5m



IP20



FINISH



Anod. aluminum



white




Black

ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover



90° Joining connector
180° Joining connector
Mounting clip (metal)



ACCESSORIES



Silicone end cap
with hole/without hole



Mounting clip (metal)

Types of installation:




Material: PMMA Co-extrusion

Dimension: 11.7×12mm

Length: MAX 5m

ALP025



FINISH




white



ACCESSORIES



Silicone end cap
with hole/without hole



Mounting clip (metal)

Types of installation:




Material: PMMA Co-extrusion

Dimension: 7×10mm

Length: MAX 5m

ALP026





FINISH



white



ALP073

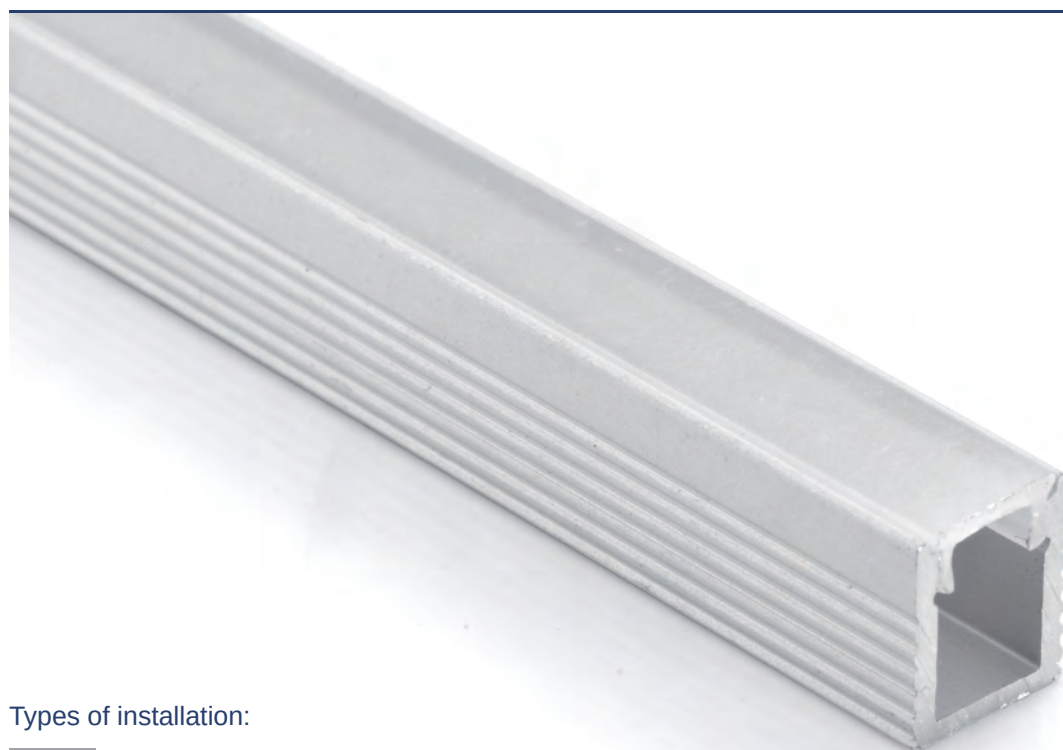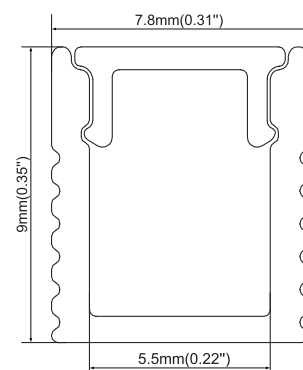

Types of installation:



Material: Extruded aluminum
Dimension: 7.8×9mm
Length: MAX 5m



FINISH



Anod. aluminum




white




Black

ACCESSORIES



Plastic end cap
with hole/without hole



PC frosted cover
Black PC frosted cover



Mounting clip (metal)




Types of installation:



Material: Extruded aluminum
Dimension: 7.8×12mm
Length: MAX 5m

ALP116

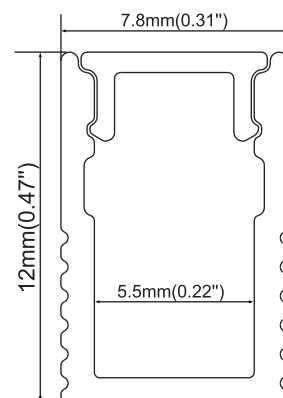

ACCESSORIES



Plastic end cap
with hole/without hole



IP20



FINISH




Anod. aluminum



white



Black



PC frosted cover
Black PC frosted cover



Mounting clip (metal)




Types of installation:



Material: Extruded aluminum
Dimension: 12.8×12mm
Length: MAX 5m

ALP117



ACCESSORIES



Plastic end cap
with hole/without hole



IP20



FINISH



Anod. aluminum




white




Black



PC frosted cover
Black PC frosted cover



ALP119



Types of installation:



Material: Extruded aluminum

Dimension: 10×12mm

Length: MAX 5m



ACCESSORIES



Plastic end cap
with hole/without hole



PC frosted cover




Steel wire



90° Vertical connector
180° Connector
90° Horizontal connector

FINISH



Anod. aluminum

white

Black

Golden




Types of installation:



Material: Extruded aluminum
Dimension: 10×13.1mm
Length: MAX 5m

ALP035-R

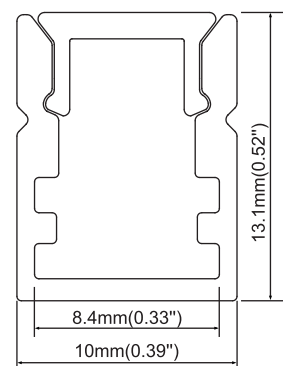

ACCESSORIES



Plastic end cap
with hole/without hole



IP20



FINISH



Anod. aluminum



white



Black



PC frosted cover



Mounting clip (metal)




Types of installation:




Material: Extruded aluminum
Dimension: 10×16mm
Length: MAX 5m

ALP035-RL



ACCESSORIES



Plastic end cap
with hole/without hole



IP20



FINISH



Anod. aluminum



white



Black



PC semi clear lens
PC clear lens

Types of installation:




Material: Extruded aluminum

Dimension: 18×5.6mm

Length: MAX 5m

ALP114

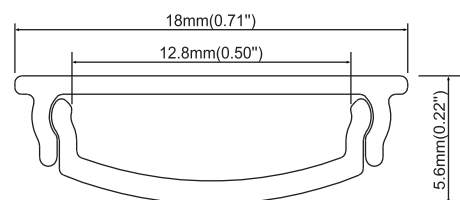


ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover

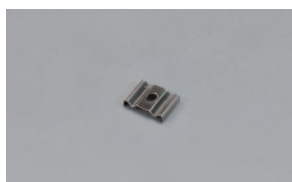

Mounting clip (metal)

FINISH



Anod. aluminum

white

Black

ALP140


Types of installation:




Material: Extruded aluminum

Dimension: 17.1×20mm


Length: MAX 5m

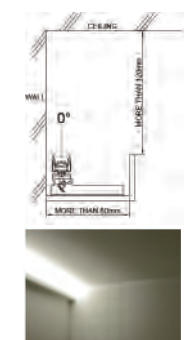


0 degrees adjustable

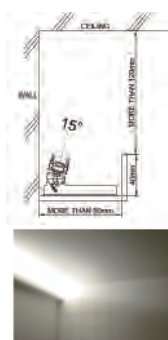




15 degrees adjustable

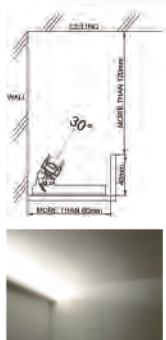

30 degrees adjustable

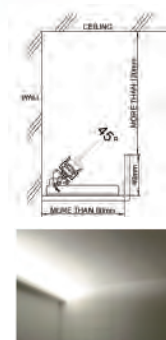


45 degrees adjustable

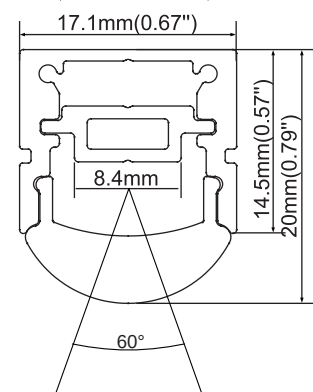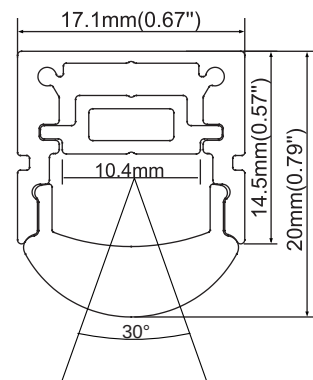

ACCESSORIES



Aluminum end cap
without hole

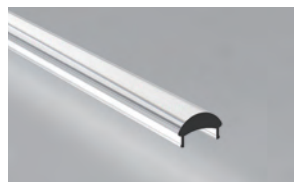

PC or PMMA lens



Adjustable bracket
Mounting clip (metal)



IP20



FINISH



Anod. aluminum



white



Black




Types of installation:



Material: Extruded aluminum
Dimension: 29.5×13.4mm
Length: MAX 5m

ALP100




FINISH




ACCESSORIES



Aluminum end cap
with hole/without hole



Black PC frosted cover



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



Spring clip




Types of installation:



Material: Extruded aluminum
Dimension: 36.1×18.5mm
Length: MAX 5m

ALP099

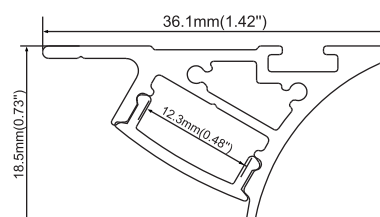

FINISH




ACCESSORIES



Aluminum end cap
with hole/without hole



Black PC frosted cover




PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



ACCESSORIES



Plastic end cap
with hole/without hole




PMMA opal matte cover
PMMA semi clear cover


Types of installation:




Material: Extruded aluminum
Dimension: 18×16.2mm
Length: MAX 5m

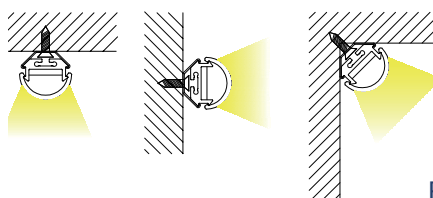

ALP039



FINISH

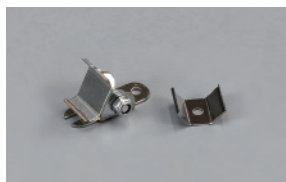


Adjustable bracket
Mounting clip (metal)



ACCESSORIES



Plastic end cap
with hole/without hole




PMMA semi clear cover
PMMA clear lens (30°)

Types of installation:




Material: Extruded aluminum
Dimension: 18×15.2mm
Length: MAX 5m

ALP039-30

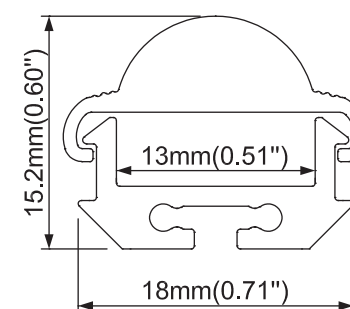

FINISH



Adjustable bracket
Mounting clip (metal)




Types of installation:



Material: Extruded aluminum
Dimension: 18×15.3mm
Length: MAX 5m


ALP039-60




ACCESSORIES



Plastic end cap
with hole/without hole



PMMA semi clear cover
PMMA clear lens (60°)



Adjustable bracket
Mounting clip (metal)

FINISH



IP20



Anod. aluminum



white



Black




Types of installation:



Material: Extruded aluminum
Dimension: 18×14mm
Length: MAX 5m


ALP039-90




ACCESSORIES



Plastic end cap
with hole/without hole



PMMA semi clear cover
PMMA clear lens (90°)



Adjustable bracket
Mounting clip (metal)

FINISH



IP20



Anod. aluminum



white



Black



ACCESSORIES



Aluminum end cap
with hole/without hole



PMMA opal matte cover
PMMA semi clear cover


Types of installation:




Material: Extruded aluminum

Dimension: 20.3×23.5mm

Length: MAX 5m

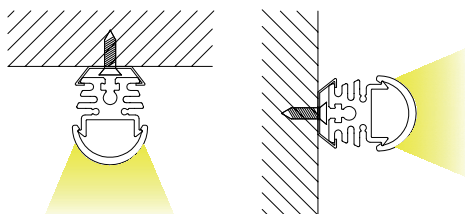

ALP040



FINISH



Anod. aluminum white Black




Mounting clip (metal)



ACCESSORIES



Aluminum end cap
with hole/without hole

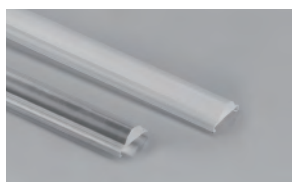

PMMA semi clear cover
PMMA clear lens (30°)

Types of installation:




Material: Extruded aluminum

Dimension: 19.9×22.3mm

Length: MAX 5m

ALP040-30



FINISH



Anod. aluminum white Black



Mounting clip (metal)



Types of installation:




Material: Extruded aluminum

Dimension: 19.3×22.7mm

Length: MAX 5m


ALP040-60



ACCESSORIES



Aluminum end cap
with hole/without hole



PMMA semi clear cover
PMMA clear lens (60°)



Mounting clip (metal)



IP20



FINISH



Anod. aluminum



white



Black



Types of installation:




Material: Extruded aluminum


Dimension: 19.7×21.5mm

Length: MAX 5m

ALP040-90



Aluminum end cap
with hole/without hole



PMMA semi clear cover
PMMA clear lens (90°)



Mounting clip (metal)



IP20



FINISH




Anod. aluminum



white



Black

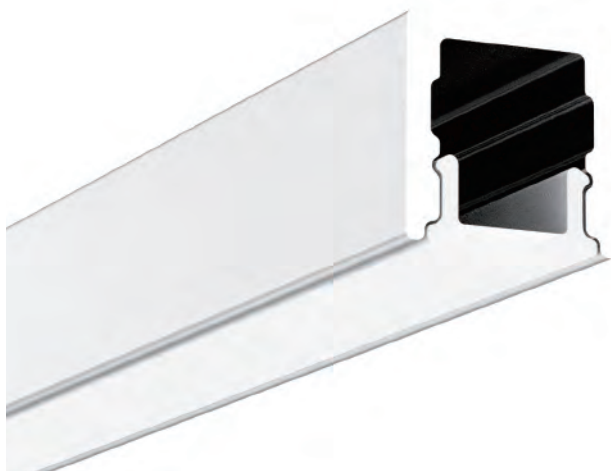


Types of installation:




Material: Extruded aluminum
Dimension: 8×8mm
Length: MAX 5m


ALP134



ACCESSORIES



Plastic end cap
with hole/without hole



PC frosted cover
Black PC frosted cover



FINISH



Anod. aluminum white Black



Mounting clip (metal)




Types of installation:



Material: Extruded aluminum
Dimension: 8×13mm
Length: MAX 5m


ALP135



ACCESSORIES



Plastic end cap
with hole/without hole



PC frosted cover



FINISH



Anod. aluminum white Black



Types of installation:




Material: Extruded aluminum

Dimension: 10×10mm

Length: MAX 5m


ALP136



ACCESSORIES



Plastic end cap
with hole/without hole



PC frosted cover



FINISH



Anod. aluminum white Black



Mounting clip (metal)



Types of installation:




Material: Extruded aluminum

Dimension: 22.2×8mm

Length: MAX 5m


ALP137

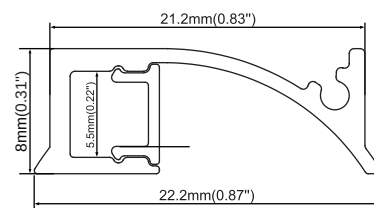

ACCESSORIES



Aluminum end cap
with hole/without hole



PC frosted cover



FINISH



Anod. aluminum white Black

Types of installation:





Material: Extruded aluminum

Dimension: 21×10mm

Length: MAX 5m



ALP202

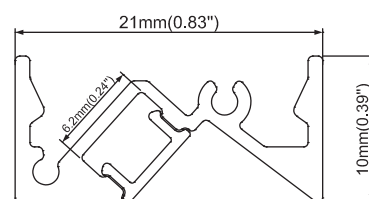

FINISH



Anod. aluminum



white



Black




Bronze



ACCESSORIES



Plastic end cap
without hole



PC frosted cover




Mounting clip (metal)





ALP203




Types of installation:



Material: Extruded aluminum

Dimension: 12×12mm

Length: MAX 5m



ACCESSORIES



Plastic end cap
without hole



PC diffused cover

FINISH



Anod. aluminum




white



Black



Bronze



3M tape



ACCESSORIES



Plastic end cap
with hole/without hole




PC diffused cover

Types of installation:



Material: Extruded aluminum
Dimension: 25×14mm
Length: MAX 5m

ALP138

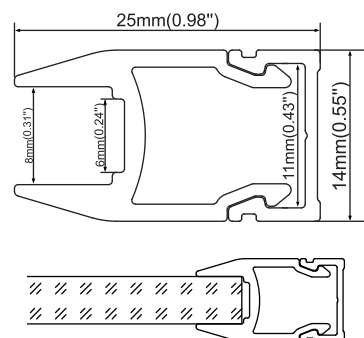

FINISH



Anod. aluminum white Black




IP20



ACCESSORIES



Plastic end cap
with hole/without hole




PC diffused cover

Types of installation:



Material: Extruded aluminum
Dimension: 19×12mm
Length: MAX 5m

ALP139



FINISH



Anod. aluminum white Black



IP20



Mounting clip (metal)

Types of installation:




Material: Extruded aluminum

Dimension: 25.4×16mm

Length: MAX 5m

ALP109-R



IP20



FINISH



Anod. aluminum



white




Black


ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover



Black PC frosted cover



Mounting clip (metal)



180° connector
90° Vertical connector
90° Horizontal connector



Steel wire

Types of installation:




Material: Extruded aluminum

Dimension: 25.4×23mm

Length: MAX 5m



ALP109-RD



IP20



FINISH



Anod. aluminum




white




Black

ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover



Mounting clip (metal)



180° connector
90° Vertical connector
90° Horizontal connector



Steel wire

Types of installation:




Material: Extruded aluminum

Dimension: 25.4×25.4mm

Length: MAX 5m



ALP104-R

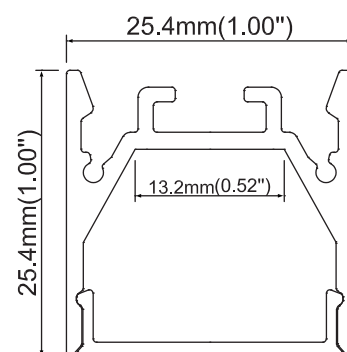

IP20



FINISH



Anod. aluminum



white




Black


ACCESSORIES




Aluminum end cap
without hole



PC diffused cover



Black PC frosted cover

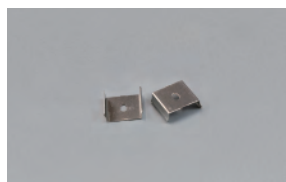

Mounting clip (metal)



180° connector
90° Vertical connector
90° Horizontal connector



Steel wire

Types of installation:




Material: Extruded aluminum

Dimension: 35.4×25.4mm

Length: MAX 5m



ALP105-R



IP20



FINISH



Anod. aluminum



white




Black


ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover



Black PC frosted cover



Spring clip



180° Connector
90° Vertical connector
90° Horizontal connector

Types of installation:




Material: Extruded aluminum

Dimension: 25.4×32.4mm

Length: MAX 5m



ALP106-R

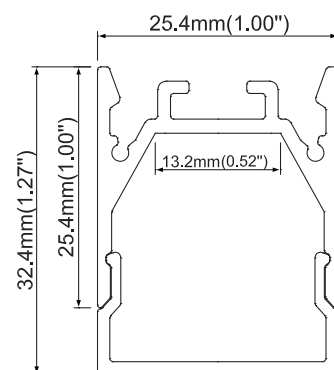

FINISH



ACCESSORIES



Aluminum end cap
without hole



PC diffused cover



Steel wire
Mounting clip (metal)



180° Connector
90° Vertical connector
90° Horizontal connector

Types of installation:




Material: Extruded aluminum

Dimension: 25.4×35mm

Length: MAX 5m



ALP107-R

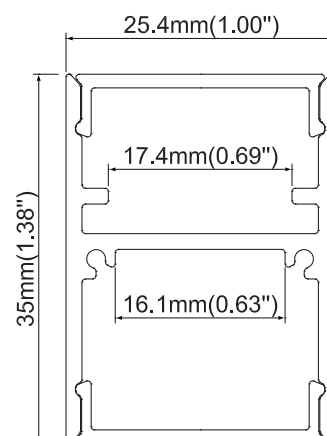

IP20



FINISH



Anod. aluminum



white




Black


ACCESSORIES



Aluminum end cap
without hole



PC diffused cover



Black PC frosted cover



180° Connector
90° Horizontal connector



Steel wire
Hanging clip

Types of installation:




Material: Extruded aluminum

Dimension: 25.4×42mm

Length: MAX 5m



ALP108-R

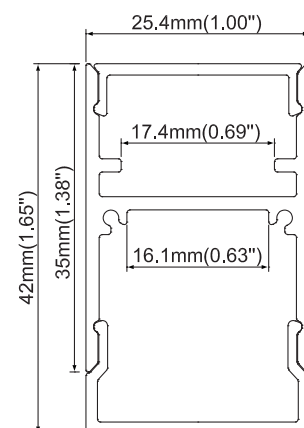

IP20



FINISH



Anod. aluminum



white




Black


ACCESSORIES



Aluminum end cap
without hole

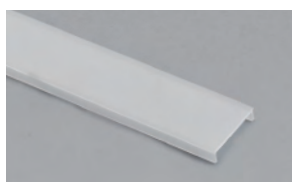

PC diffused cover
(for up light)

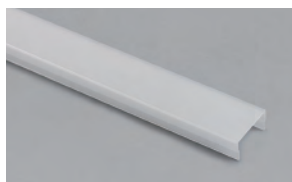


PC diffused cover
(for down light)



Steel wire
Hanging clip




180° Connector
90° Horizontal connector

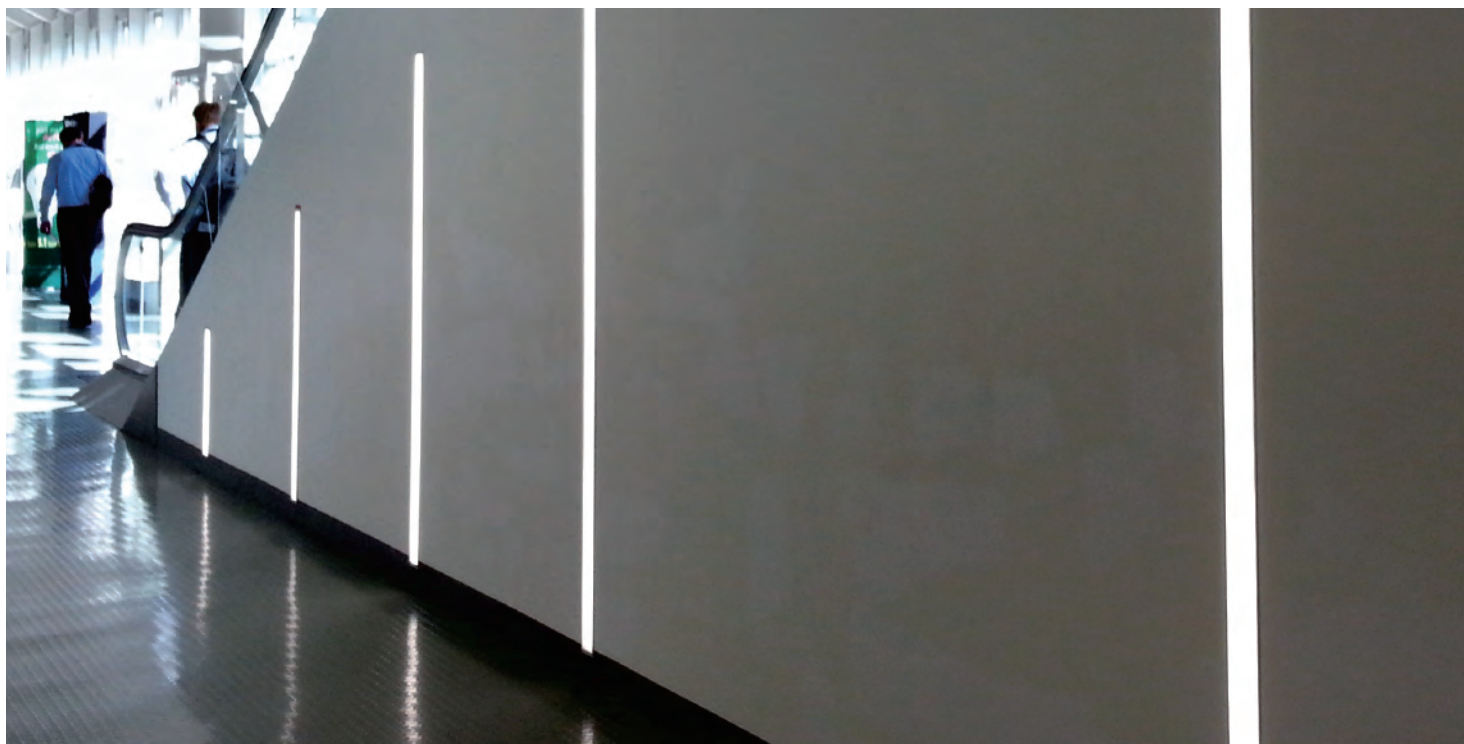


Types of installation:



Material: Extruded aluminum
Dimension: 50×35mm
Length: MAX 5m

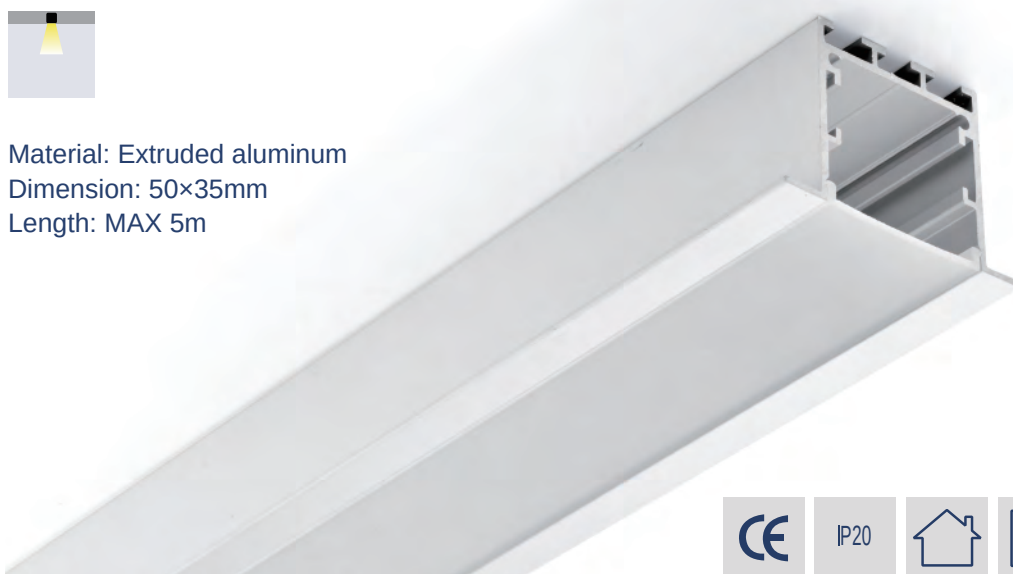

ALP017-R5



FINISH



Anod. aluminum



white




Black


ACCESSORIES



Aluminum end cap
without hole




PMMA opal matte cover
PC diffused cover
Black PC frosted cover



Low glare control cover
(co-extrusion)



Spring clip
180° Connector
90° Vertical connector
90° Horizontal connector

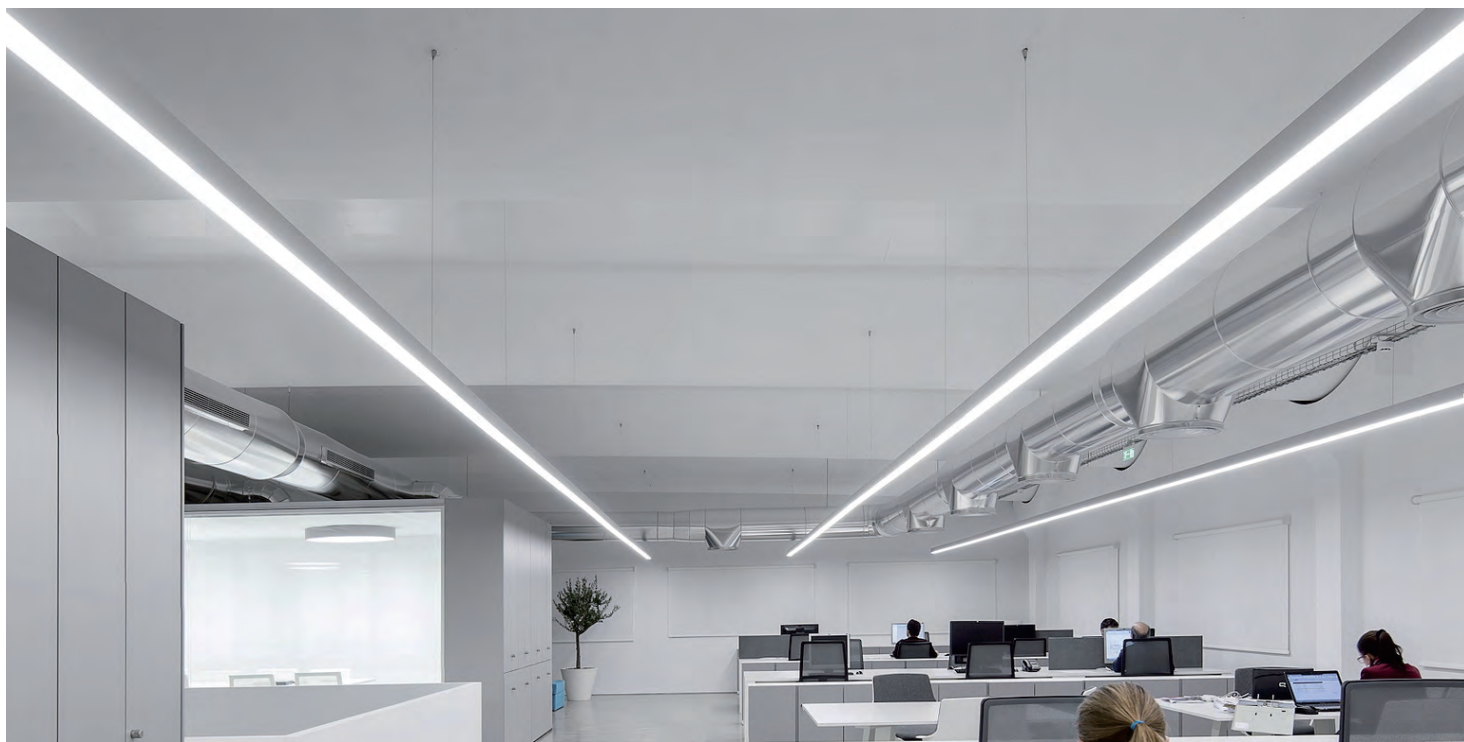

ACCESSORIES




Types of installation:



Material: Extruded aluminum
Dimension: 35×35mm
Length: MAX 5m


FINISH

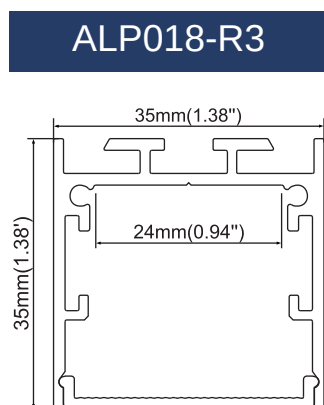


Aluminum end cap
without hole



CNC end caps

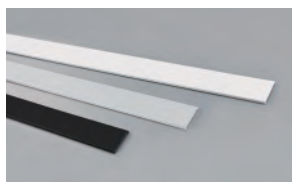

PMMA opal matte cover
PC diffused cover
Black PC frosted cover

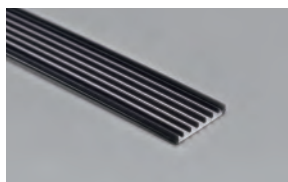

Low glare control cover
(co-extrusion)



Steel wire
Mounting clip (metal)



180° Connector
90° Vertical connector
90° Horizontal connector

Types of installation:




Material: Extruded aluminum

Dimension: 65×35mm

Length: MAX 5m



ALP045-R

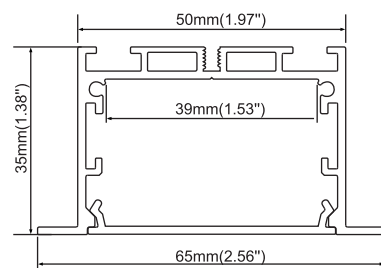

IP20



FINISH



Anod. aluminum



white




Black

ACCESSORIES



Aluminum end cap
without hole



PC diffused cover
Black PC frosted cover



Spring clip



180° Connector
90° Vertical connector
90° Horizontal connector

Types of installation:





Material: Extruded aluminum

Dimension: 50×35mm

Length: MAX 5m



ALP046-R

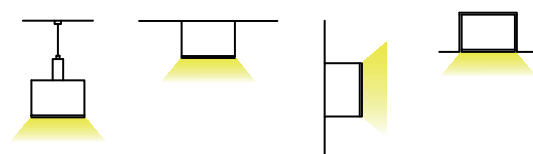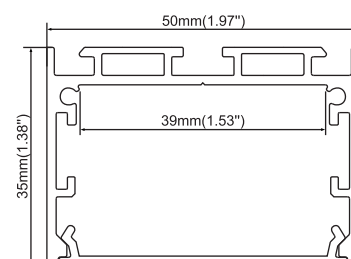


FINISH




ACCESSORIES



Aluminum end cap
without hole



CNC end caps



PC diffused cover
Black PC frosted cover



Steel wire
Mounting clip (metal)



180° Connector
90° Vertical connector
90° Horizontal connector

Types of installation:




Material: Extruded aluminum

Dimension: 90×35mm

Length: MAX 5m



ALP047-R1

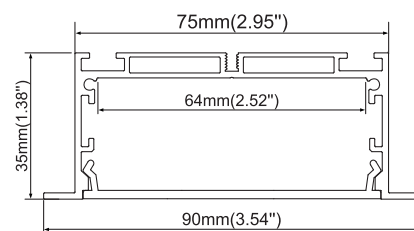

IP20



FINISH



Anod. aluminum



white




Black

ACCESSORIES



Aluminum end cap
without hole



PC diffused cover



Spring clip



180° Connector
90° Vertical connector
90° Horizontal connector

Types of installation:




Material: Extruded aluminum

Dimension: 75×35mm

Length: MAX 5m



ALP048-R1

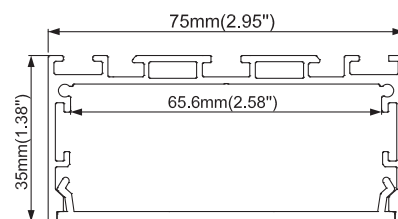

IP20



FINISH



Anod. aluminum



white




Black

ACCESSORIES



Aluminum end cap
without hole



PC diffused cover



Steel wire
Mounting clip (metal)



180° Connector
90° Vertical connector
90° Horizontal connector

Types of installation:




Material: Extruded aluminum

Dimension: 65×35mm

Length: MAX 5m



ALP6535

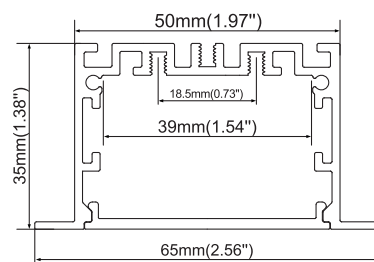

ACCESSORIES



Aluminum end cap
without hole



PC frosted cover



Spring clip



180° Connector
90° Vertical connector
90° Horizontal connector



FINISH



Anod. aluminum

white

Black

Types of installation:




Material: Extruded aluminum

Dimension: 50×35mm

Length: MAX 5m




ALP5035

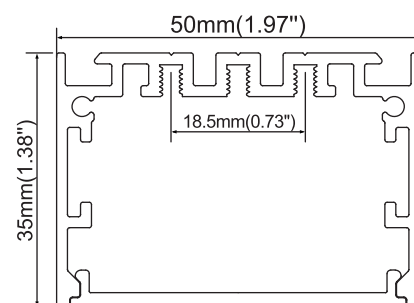

ACCESSORIES



Aluminum end cap
without hole



PC frosted cover



Steel wire
Mounting clip (metal)



180° Connector
90° Vertical connector
90° Horizontal connector



FINISH



Anod. aluminum

white

Black

Types of installation:





Material: Extruded aluminum

Dimension: 42×35mm

Length: MAX 5m



ALP019-R

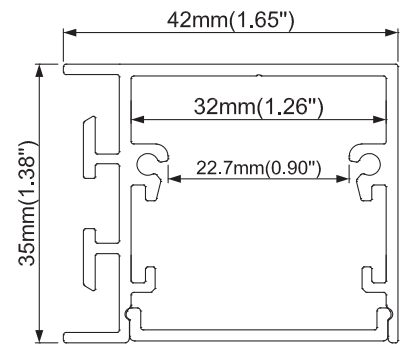

FINISH



Anod. aluminum



white



Black

ACCESSORIES



Aluminum end cap
without hole



PC diffused cover



Mounting clip (metal)



180° Connector
90° Vertical connector
90° Horizontal connector




ALP049-R



Types of installation:



Material: Extruded aluminum
Dimension: 42.28×85mm
Length: MAX 5m

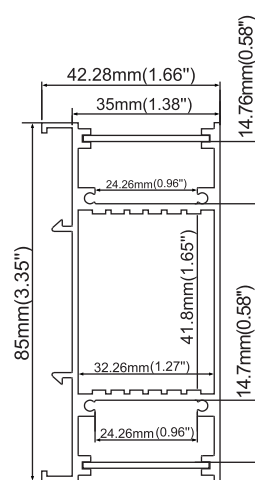

ACCESSORIES



Aluminum end cap
without hole



PC diffused cover



Mounting clip (metal)





FINISH



Anod. aluminum white Black

ALP050

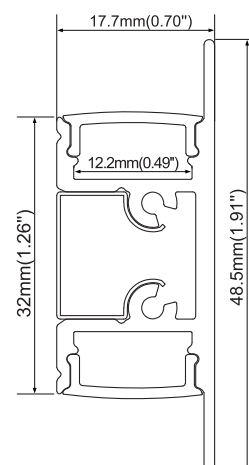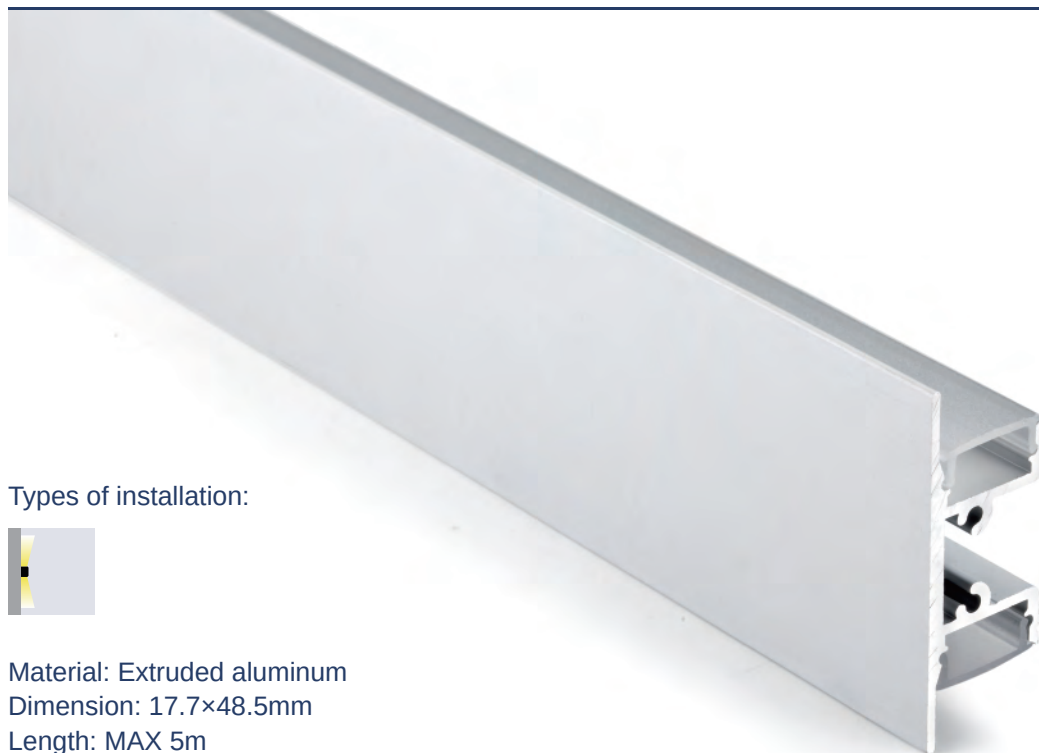

Types of installation:



Material: Extruded aluminum

Dimension: 17.7×48.5mm

Length: MAX 5m



IP20



FINISH



Anod. aluminum



white




Black

ACCESSORIES



Aluminum end cap
with hole/without hole




PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



Mounting clip (metal)



ALP062

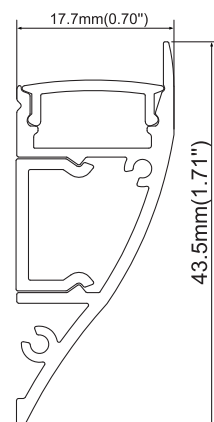

Types of installation:



Material: Extruded aluminum

Dimension: 17.7×43.5mm

Length: MAX 5m

ACCESSORIES



Aluminum end cap
without hole



FINISH




Anod. aluminum




white



Black



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover

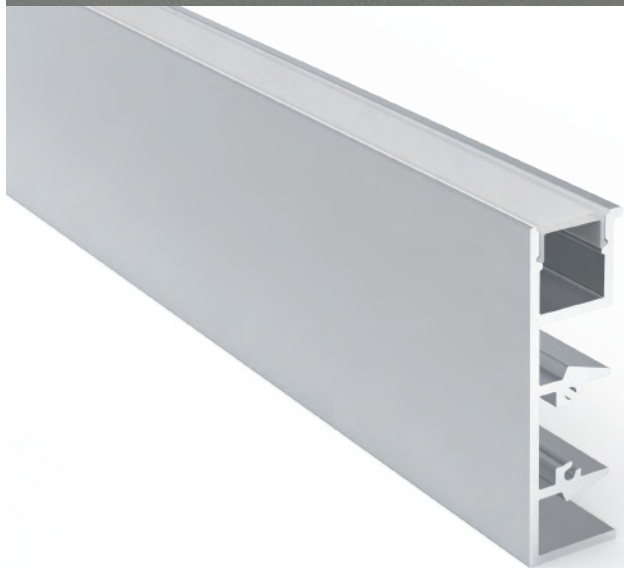


Types of installation:



Material: Extruded aluminum
Dimension: 15×50mm
Length: MAX 5m

ALP169

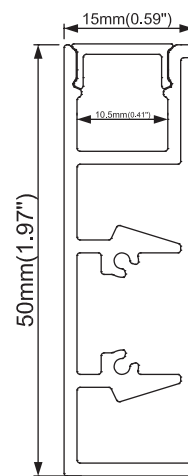

FINISH



Anod. aluminum



white



Black

ACCESSORIES



Aluminum end cap
without hole




PC diffused cover



Mounting clip (metal)



180° Connector
90° Vertical connector
90° Horizontal connector

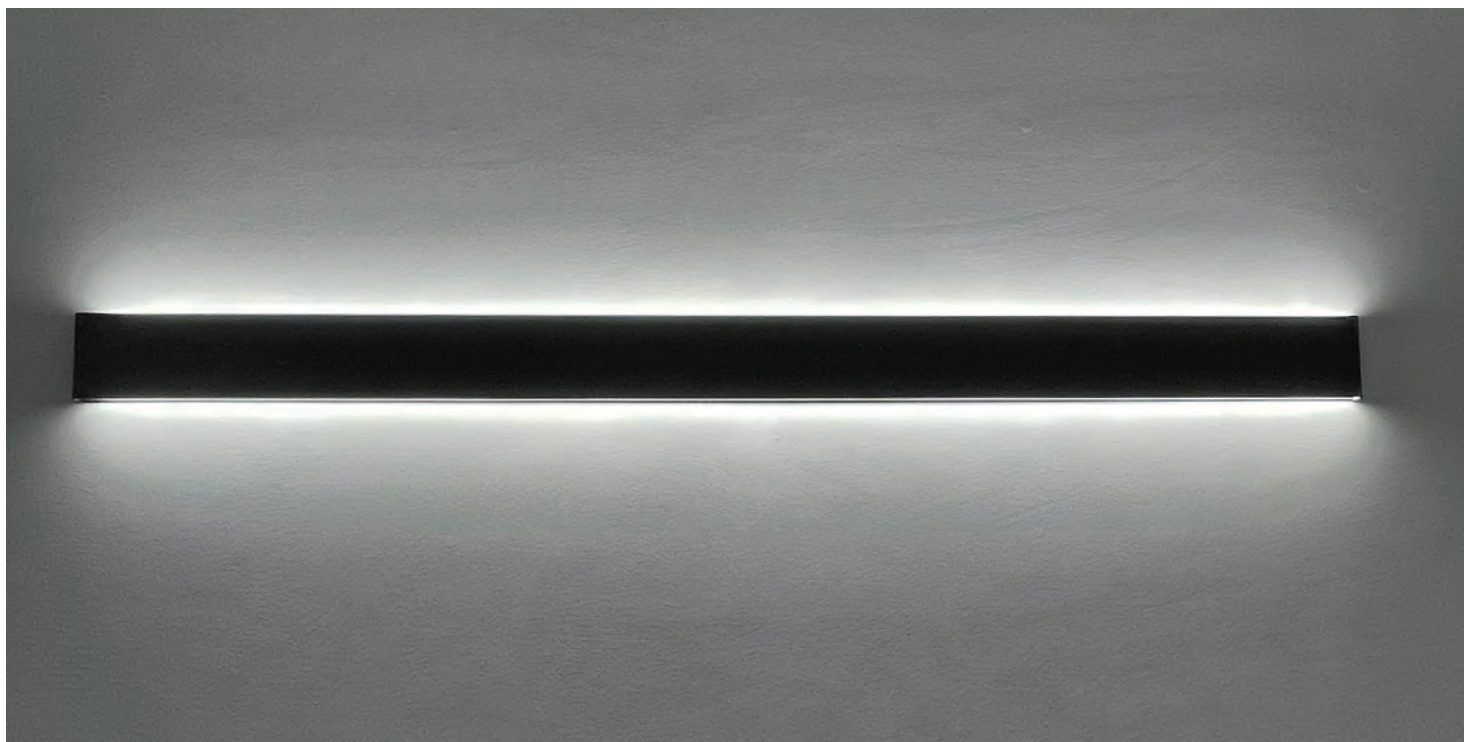

Types of installation:



Material: Extruded aluminum
Dimension: 15×75mm
Length: MAX 5m



IP20



FINISH



Anod. aluminum




white



Black

ALP170

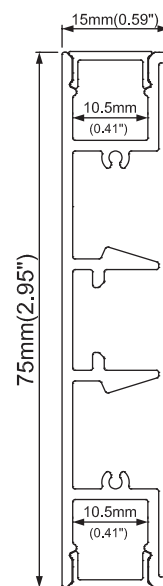

ACCESSORIES



Aluminum end cap
without hole




PC diffused cover



Mounting clip (metal)



180° Connector
90° Vertical connector
90° Horizontal connector

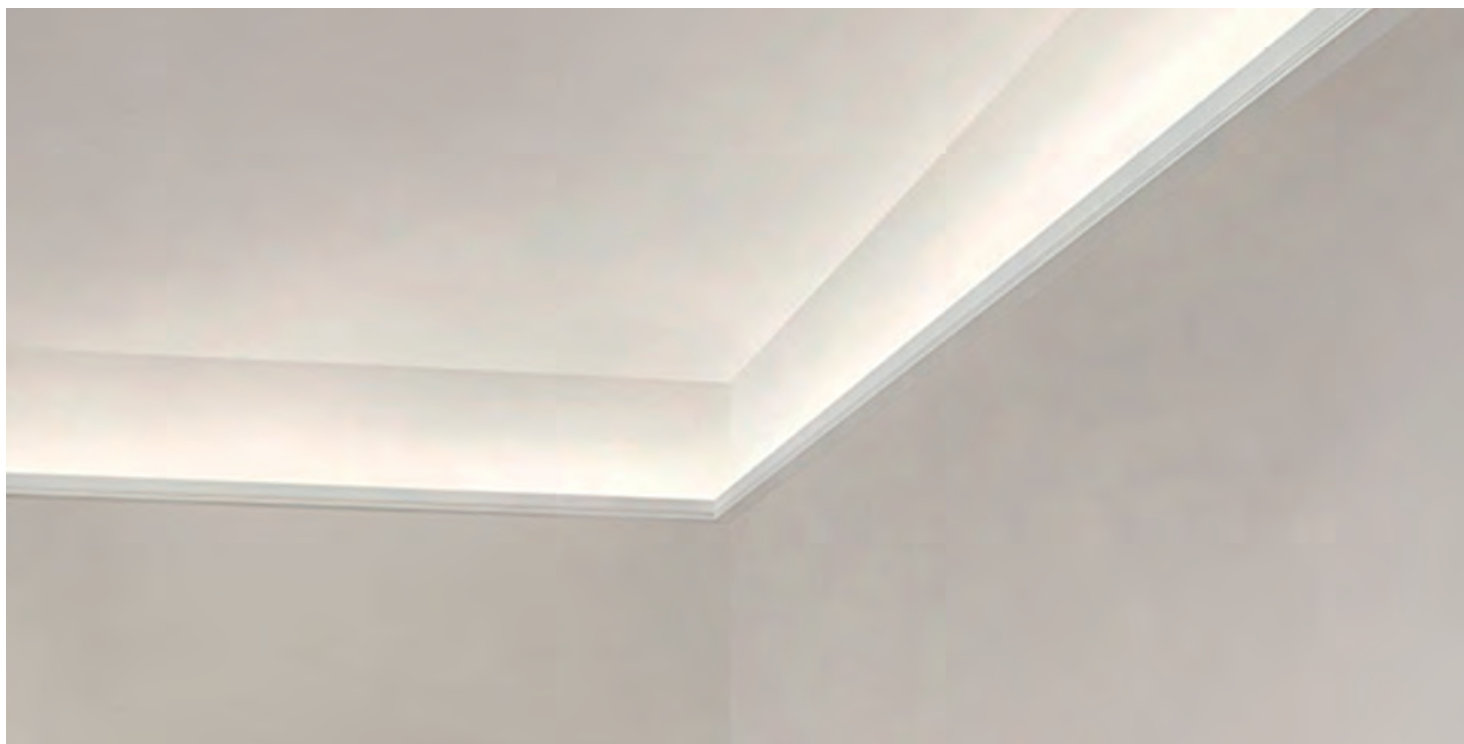



Types of installation:



Material: Extruded aluminum
Dimension: 15.4×32.2mm
Length: MAX 5m



ALP195

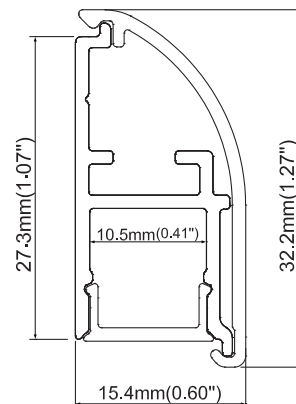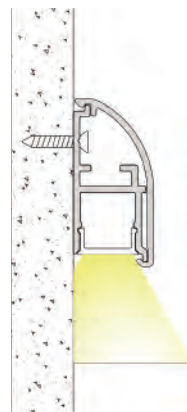

ACCESSORIES



Plastic end cap
without hole



PC diffused cover



FINISH



Anod. aluminum white Black



180° Connector
90° Vertical connector
90° Horizontal connector




Types of installation:



Material: Extruded aluminum
Dimension: 23.5×22.6mm
Length: MAX 5m



ALP196



FINISH



Anod. aluminum



white




Black



ACCESSORIES



Aluminum end cap
without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



Mounting clip (metal)



180° Connector
90° Vertical connector
90° Horizontal connector





ALP200



Types of installation:




Material: Extruded aluminum
Dimension: 67.7×30.3mm
Length: MAX 5m

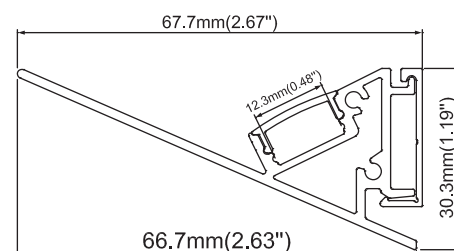

ACCESSORIES



Aluminum end cap
without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



IP20



FINISH



Anod. aluminum




white




Black



180° Connector
90° Vertical connector
90° Horizontal connector

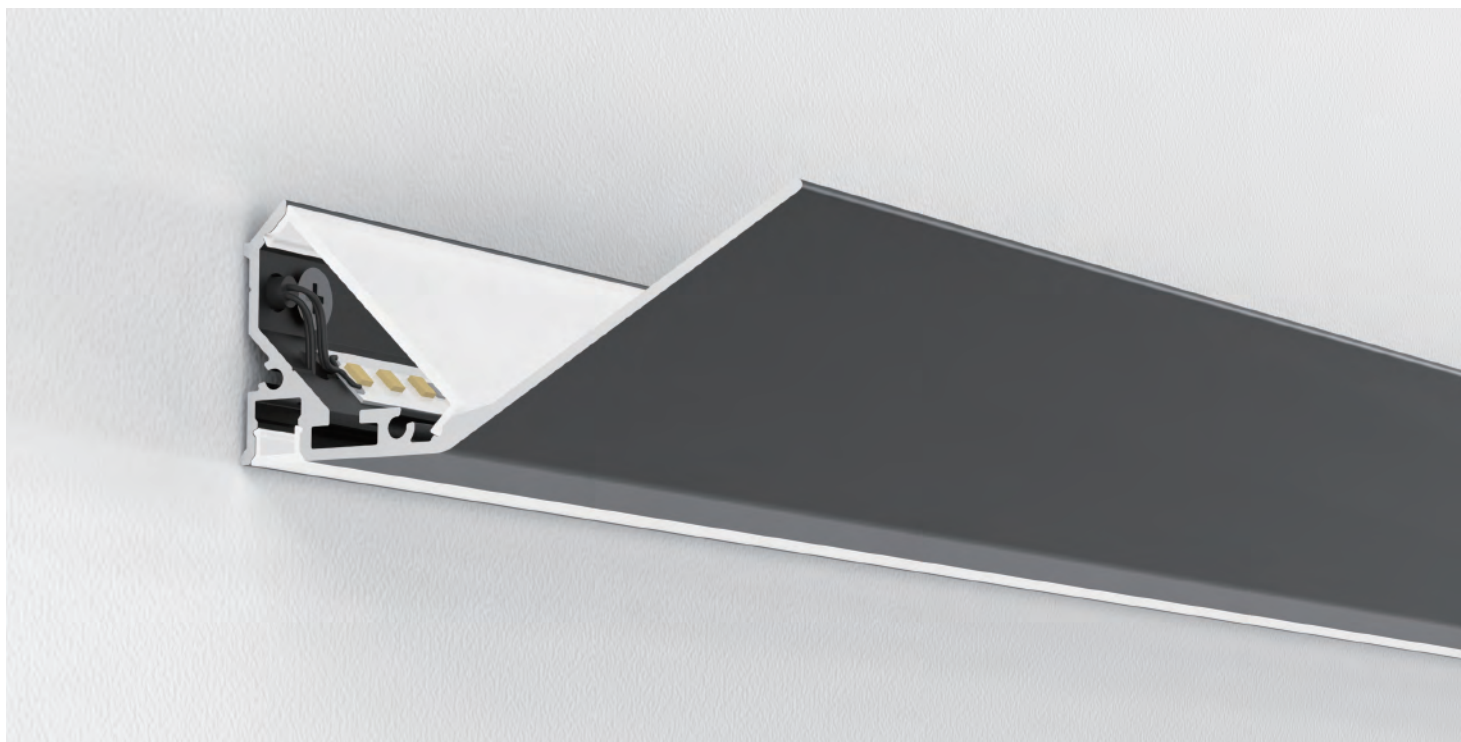


ALP201

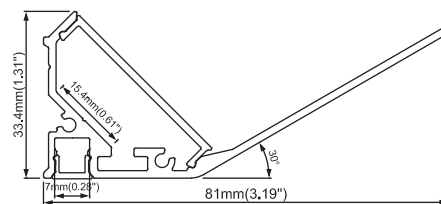


Types of installation:



Material: Extruded aluminum
Dimension: 81×33.4mm
Length: MAX 5m

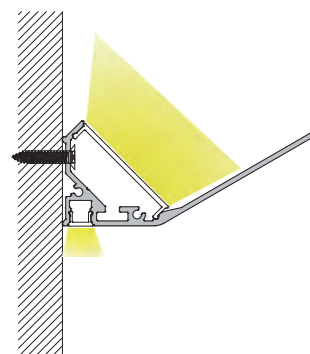

ACCESSORIES



Aluminum end cap
without hole



IP20



FINISH




Anod. aluminum



white



Black



PC frosted cover
(for down light)
PC diffused cover
(for up light)



180° Connector
90° Vertical connector
90° Horizontal connector

Types of installation:




Material: Extruded aluminum

Dimension: 30×32mm

Length: MAX 5m



ALP3030

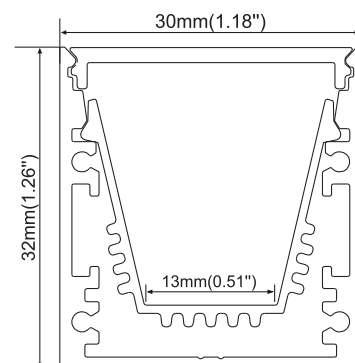

IP20



FINISH



Anod. aluminum



white




Black

ACCESSORIES



Die cast end caps



PC frosted cover
Black PC frosted cover



90° Horizontal connector
90° Vertical connector
180° Connector



Steel wire

Types of installation:




Material: Extruded aluminum

Dimension: 39×36mm

Length: MAX 5m



ALP3030-T



IP20



FINISH



Anod. aluminum



white




Black

ACCESSORIES



Aluminum end cap
without hole



PC frosted cover
Black PC frosted cover



Mounting clip (metal)



Spring clip



90° Horizontal connector
90° Vertical connector
180° Connector

Types of installation:




Material: Extruded aluminum

Dimension: 60×60mm

Length: MAX 5m



ALP6060-R



FINISH



Anod. aluminum


white

Black

ACCESSORIES



Aluminum end cap
without hole



PC frosted cover



Steel wire

Types of installation:




Material: Extruded aluminum

Dimension: 60×60mm

Length: MAX 5m



ALP6060-R1



FINISH



Anod. aluminum




white




Black

ACCESSORIES



Aluminum end cap
without hole



PC frosted cover



90° Horizontal connector(bottom)
90° Vertical connector (side)



180° Connector




90° Vertical connector (bottom)
90° Horizontal connector(side)



Outside clip




Steel wire

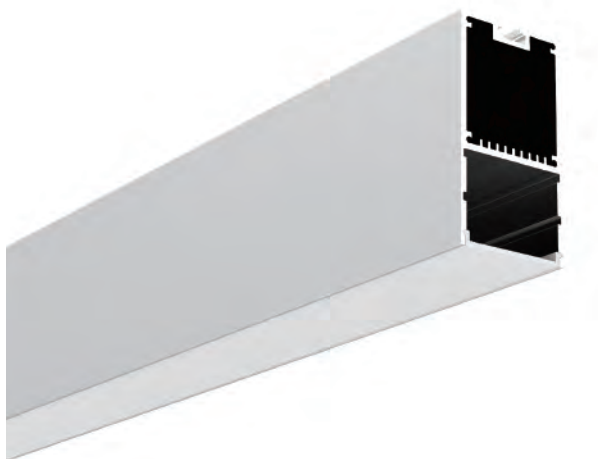

ACCESSORIES



Aluminum end cap
without hole




PC diffused cover

Types of installation:



Material: Extruded aluminum
Dimension: 35.2×66.8mm
Length: MAX 5m

ALP051

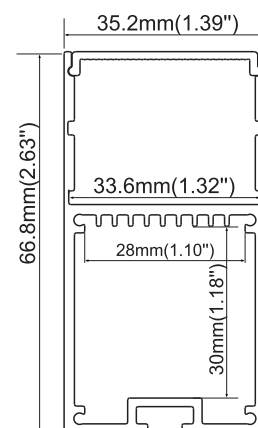

FINISH



Anod. aluminum



white



Black



IP20



Steel wire



ACCESSORIES



Aluminum end cap
without hole




PC frosted cover

Types of installation:



Material: Extruded aluminum
Dimension: 38.1×80mm
Length: MAX 5m

ALP3880

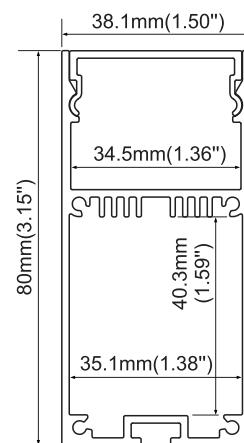

FINISH



Anod. aluminum



white



Black



IP20



Steel wire



ACCESSORIES



Aluminum end cap
without hole



PC diffused cover
PC frosted cover

Types of installation:




Material: Extruded aluminum

Dimension: 35×43.8mm

Length: MAX 5m

ALP053-R



FINISH



Anod. aluminum

white

Black




Steel wire
Mounting clip (metal)



ACCESSORIES



Aluminum end cap
without hole



PC diffused cover

Types of installation:




Material: Extruded aluminum

Dimension: 35×61.7mm

Length: MAX 5m

ALP054-R1

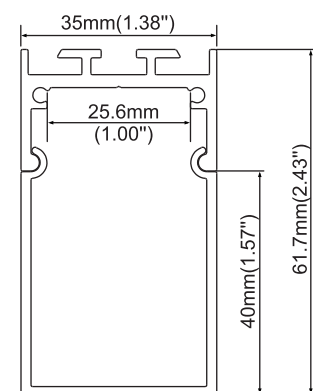

FINISH



Anod. aluminum

white

Black



Steel wire
Mounting clip (metal)




Types of installation:



Material: Extruded aluminum
Dimension: 55×75mm
Length: MAX 5m



ALP056-R

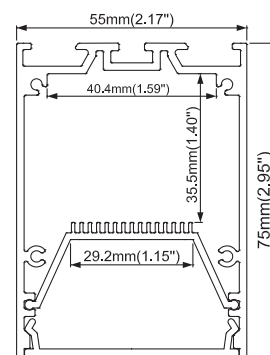

ACCESSORIES



Aluminium end cap
without hole



PC frosted cover



Steel wire
Mounting clip (metal)



IP20



FINISH



Anod. aluminum



white



Black

Types of installation:




Material: Extruded aluminum

Dimension: 55×75.1mm

Length: MAX 5m



ALP056-DR

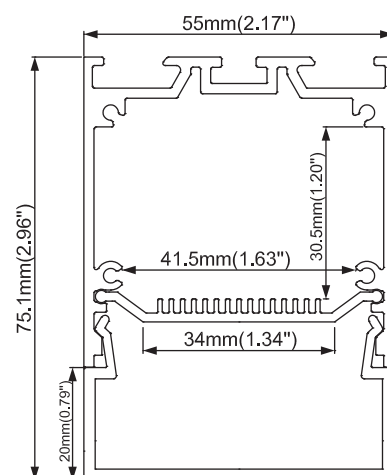

IP20



FINISH



Anod. aluminum




white




Black

ACCESSORIES



Aluminum end cap
without hole



PC frosted cover



Steel wire
Mounting clip (metal)




ALP052

Types of installation:




Material: Extruded aluminum
Dimension: 50×70mm
Length: MAX 5m

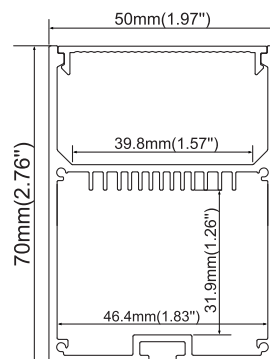

FINISH



ACCESSORIES



Aluminum end cap
without hole



PC diffused cover



180° Connector
90° Connector



Steel wire




Types of installation:




Material: Extruded aluminum
Dimension: 75×75mm
Length: MAX 5m

ALP057




ACCESSORIES



Aluminum end cap
without hole



Steel wire

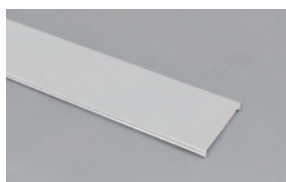

PC diffused cover



IP20



FINISH



Anod. aluminum



white



Black

Types of installation:




Material: Extruded aluminum

Dimension: 38×75mm

Length: MAX 5m



ALP3875-R

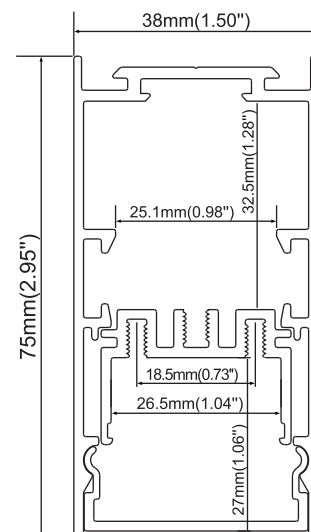

ACCESSORIES



Die cast end caps



IP20



FINISH



Anod. aluminum



white



Black



PC frosted cover



Internal clip



Outside clip



90° Horizontal connector(bottom)
90° Vertical connector (side)



180° Connector



90° Vertical connector (bottom)
90° Horizontal connector(side)



Safety wire



Steel wire

Types of installation:




Material: Extruded aluminum

Dimension: 50×75mm

Length: MAX 5m



ALP5075-R

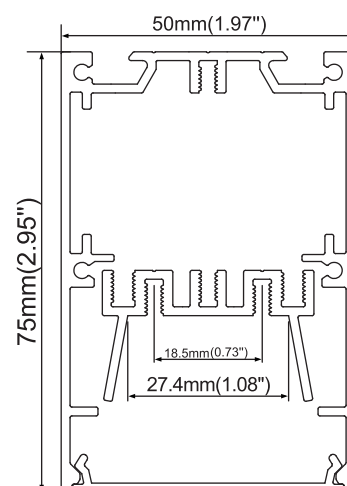

IP20



FINISH



Anod. aluminum




white




Black

ACCESSORIES



Aluminum end cap
without hole



PMMA clear cover
+Prismatic film



PC frosted cover



Outside clip



Internal clip



Trimless recessed clip



Steel wire



90° Vertical connector
180° Connector
90° Horizontal connector

Types of installation:




Material: Extruded aluminum

Dimension: 50×75mm

Length: MAX 5m



ALP5075-R1

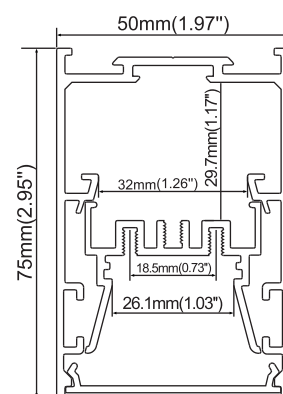

IP20



FINISH



Anod. aluminum



white




Black

ACCESSORIES



Die cast end caps



PC frosted cover



Outside clip
Internal clip



90° Horizontal connector(bottom)
90° Vertical connector (side)



180° Connector



90° Vertical connector (bottom)
90° Horizontal connector(side)



Safety wire



Steel wire




Types of installation:



Material: Extruded aluminum
Dimension: 50×75mm
Length: MAX 5m



ALP5075-C

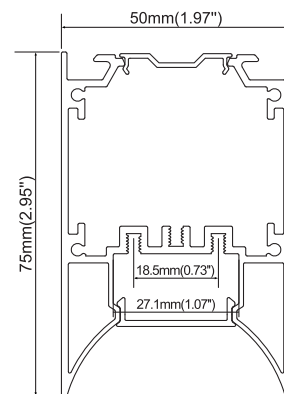


FINISH



Anod. aluminum white Black

ACCESSORIES



Aluminum end cap
without hole



PC frosted cover



Steel wire
Mounting clip(metal)



90° Vertical connector
180° Connector
90° Horizontal connector

Types of installation:




Material: Extruded aluminum

Dimension: 65×45mm

Length: MAX 5m



ALP6545-C

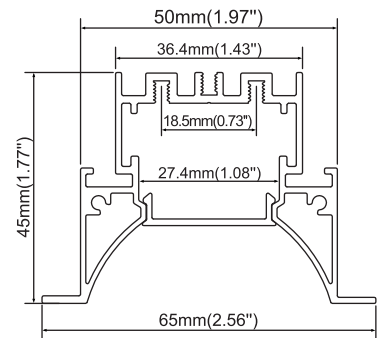

IP20



FINISH



Anod. aluminum



white



Black

ACCESSORIES



Aluminum end cap
without hole



PC frosted cover



Spring clip



180° Connector
90° Vertical connector
90° Horizontal connector

Types of installation:




Material: Extruded aluminum

Dimension: 75×75mm

Length: MAX 5m



ALP7575-R

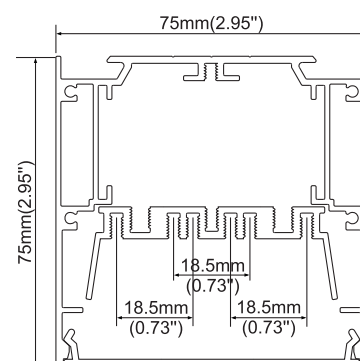

IP20



FINISH



Anod. aluminum



white




Black


ACCESSORIES




Aluminum end cap
without hole



PMMA clear cover
+Prismatic film



PC frosted cover

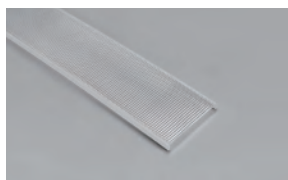

PC clear prismatic cover



Internal clip
Outside clip



90° Vertical connector
180° Connector
90° Horizontal connector



Trimless recessed clip



Steel wire

Types of installation:




Material: Extruded aluminum

Dimension: 68×75mm

Length: MAX 5m



ALP6875

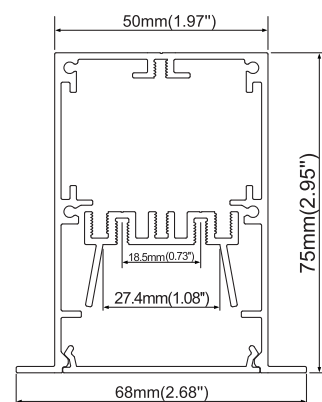

IP20



FINISH



Anod. aluminum



white




Black


ACCESSORIES



Aluminum end cap
without hole



PC frosted cover



PMMA clear cover
+Prismatic film



Stainless clip



Internal clip



90° Vertical connector
180° Connector
90° Horizontal connector

Types of installation:




Material: Extruded aluminum

Dimension: 95×75mm


Length: MAX 5m




ALP9575-R




ACCESSORIES



Aluminum end cap
without hole



PC frosted cover



PMMA clear cover
+Prismatic film



Internal clip



Stainless clip



90° Vertical connector
180° Connector
90° Horizontal connector



FINISH



Anod. aluminum



white



Black

Types of installation:




Material: Extruded aluminum

Dimension: 50×90mm

Length: MAX 5m



ALP5090

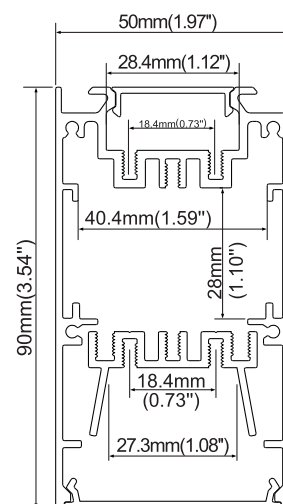

FINISH



Anod. aluminum



white



Black




IP20




ACCESSORIES



Aluminum end cap
without hole



PMMA clear cover
+Prismatic film
(for down light)



PC frosted cover
(for down light)



PC frosted cover
(for up light)



Outside clip



Internal clip



Steel wire



90° Vertical connector
180° Connector
90° Horizontal connector

Types of installation:




Material: Extruded aluminum

Dimension: 38×115mm


Length: MAX 5m



ALP38115

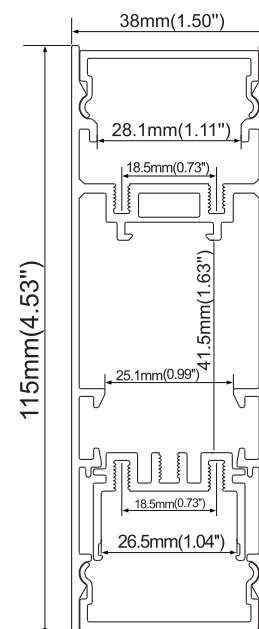

ACCESSORIES



Die cast end caps



IP20



FINISH



Anod. aluminum



white



Black



PC frosted cover



Wall clip



Internal clip



90° Horizontal connector(bottom)
90° Vertical connector (side)



180° Connector



90° Vertical connector (bottom)
90° Horizontal connector(side)



Hanging bracket



Steel wire



Types of installation:




Material: Extruded aluminum

Dimension: 50×120mm

Length: MAX 5m


ALP50120

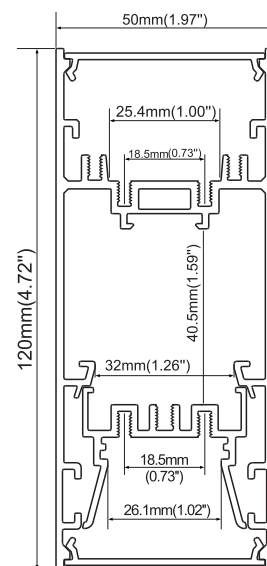

ACCESSORIES



Die cast end caps



PC frosted cover



Wall clip



180° Connector



Hanging bracket



IP20



FINISH



Anod. aluminum



white



Black



Internal clip



90° Horizontal connector(bottom)
90° Vertical connector (side)



90° Vertical connector (bottom)
90° Horizontal connector(side)



Steel wire

Types of installation:




Material: Extruded aluminum

Dimension: 63×120mm

Length: MAX 5m



ALP63120

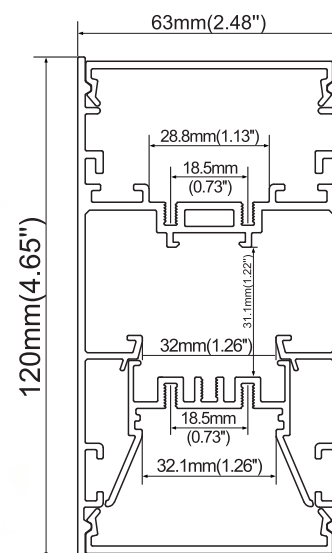

IP20



FINISH



Anod. aluminum




white




Black

ACCESSORIES



Die cast end caps



PC frosted cover



Wall clip



90° Horizontal connector(bottom)
90° Vertical connector (side)



180° Connector



90° Vertical connector (bottom)
90° Horizontal connector(side)



Hanging bracket



Steel wire

Types of installation:




Material: Extruded aluminum

Dimension: 75×120mm


Length: MAX 5m




ALP75120

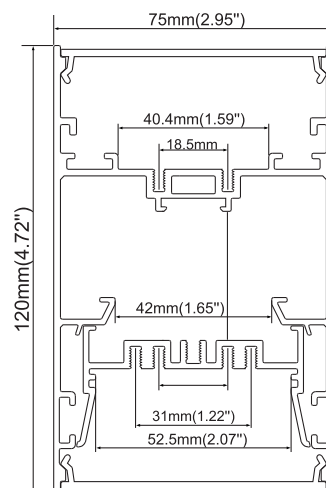

ACCESSORIES



Die cast end caps



PC frosted cover



Internal clip



180° Connector



Hanging bracket



FINISH



Anod. aluminum

white

Black



Wall clip



90° Horizontal connector(bottom)
90° Vertical connector (side)



90° Vertical connector (bottom)
90° Horizontal connector(side)



Steel wire



Types of installation:




Material: Extruded aluminum

Dimension: 75×78mm

Length: MAX 5m

ALP7578



FINISH




Anod. aluminum


white

Black


ACCESSORIES



Die cast end caps



PC frosted cover

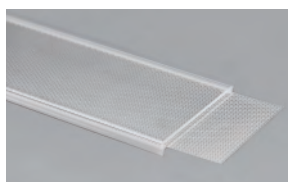

PMMA clear cover
+Prismatic film



Internal clip



90° Horizontal connector(bottom)
90° Vertical connector (side)



180° Connector



90° Vertical connector (bottom)
90° Horizontal connector(side)



Outside clip



Steel wire

Types of installation:




Material: Extruded aluminum

Dimension: 100×78mm

Length: MAX 5m



ALP10078



IP20



FINISH



Anod. aluminum




white




Black


ACCESSORIES



Die cast end caps



PC frosted cover



PMMA clear cover
+Prismatic film



90° Horizontal connector(bottom)
90° Vertical connector (side)



180° Connector



90° Vertical connector (bottom)
90° Horizontal connector(side)



Internal clip



Steel wire
Outside clip

Types of installation:




Material: Extruded aluminum

Dimension: 63×80mm

Length: MAX 5m



ALP6380

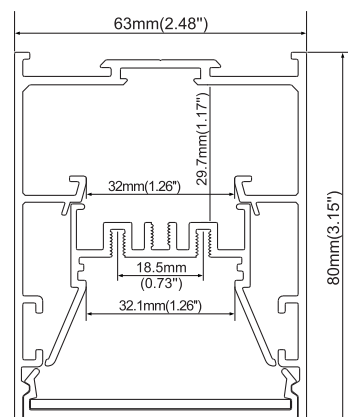

ACCESSORIES



IP20



FINISH




Anod. aluminum



white




Black




Die cast end caps



PC frosted cover



PMMA clear cover
+Prismatic film

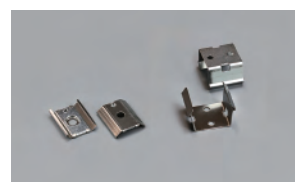

Outside clip
Internal clip



90° Horizontal connector(bottom)
90° Vertical connector (side)



180° Connector



90° Vertical connector (bottom)
90° Horizontal connector(side)



Steel wire



Safety wire

Types of installation:




Material: Extruded aluminum

Dimension: 83×80mm

Length: MAX 5m



ALP6380-T

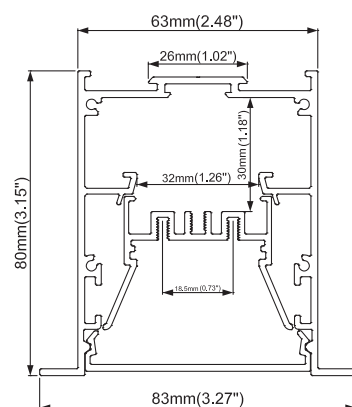

IP20



FINISH



Anod. aluminum




white



Black


ACCESSORIES



Aluminum end cap
without hole



PC frosted cover



PMMA clear cover
+Prismatic film



Internal clip



Stainless clip



90° Horizontal connector(bottom)
90° Vertical connector (side)



180° Connector



90° Vertical connector (bottom)
90° Horizontal connector(side)


Types of installation:




Material: Extruded aluminum

Dimension: 63×90mm

Length: MAX 5m

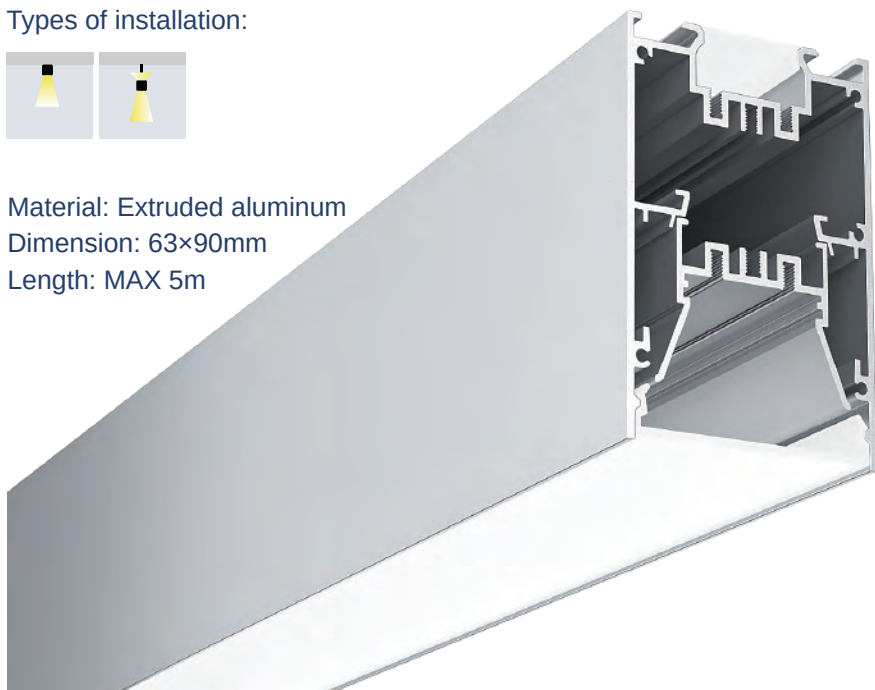

ALP6390

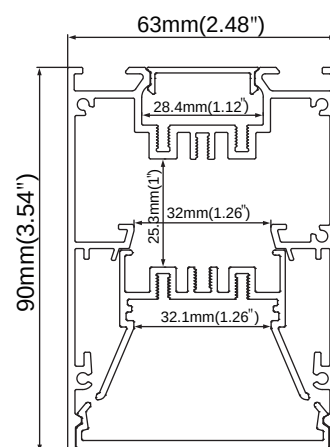

ACCESSORIES



CNC end caps



FINISH




Anod. aluminum




white



Black



PC frosted cover
(for down light)

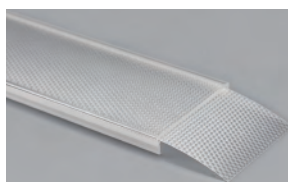

PMMA clear cover
+Prismatic film
(for down light)



PC frosted cover
(for up light)



Internal clip



Outside clip



90° Vertical connector
180° Connector
90° Horizontal connector



Safety wire



Steel wire



Types of installation:




Material: Extruded aluminum

Dimension: 45×42mm

Length: MAX 5m

ALP065



FINISH



Anod. aluminum


white

Black

ACCESSORIES



Aluminum end cap
without hole



PMMA opal matte cover
PMMA semi-clear cover
PC diffused cover



Mounting clip(metal)



Steel wire



Types of installation:




Material: Extruded aluminum

Dimension: 75×40mm

Length: MAX 5m

ALP065-T

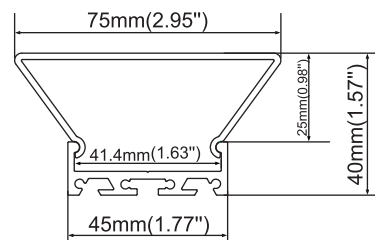

FINISH



Anod. aluminum


white

Black

ACCESSORIES



Aluminum end cap
without hole



PC diffused cover




Mounting clip(metal)



Steel wire

ALP066

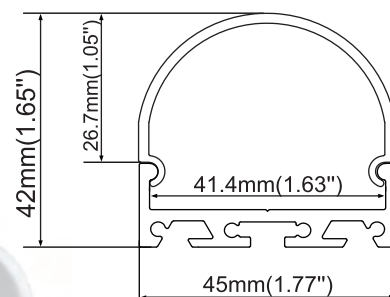

Types of installation:



Material: Extruded aluminum
Dimension: 45×42mm
Length: MAX 5m

ACCESSORIES



Aluminum end cap
without hole



PMMA opal matte cover
PMA semi-clear cover
PC diffused cover



Mounting clip(metal)



Steel wire



FINISH




Anod. aluminum white Black



180° Connector
90° Vertical connector
90° Horizontal connector



ALP023-R2

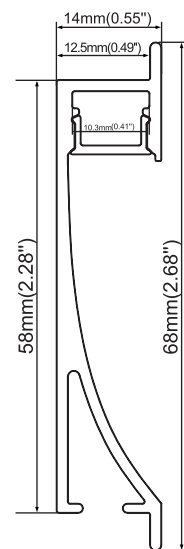

Types of installation:



Material: Extruded aluminum
Dimension: 14×68mm
Length: MAX 5m



IP20



FINISH



Anod. aluminum



white



Black

ACCESSORIES





Plastic end cap
with hole/without hole



PC diffused cover



ALP024

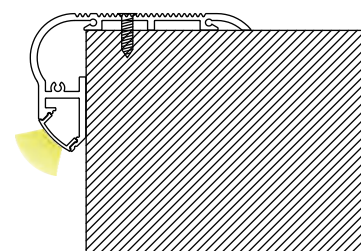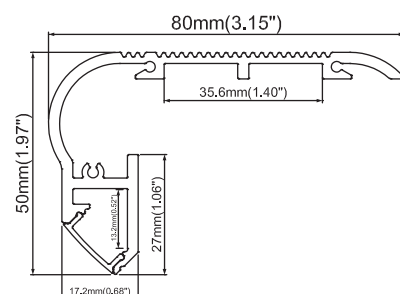

Types of installation:




Material: Extruded aluminum
Dimension: 80×50mm
Length: MAX 5m

ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover



IP20



FINISH




Anod. aluminum




white



Black

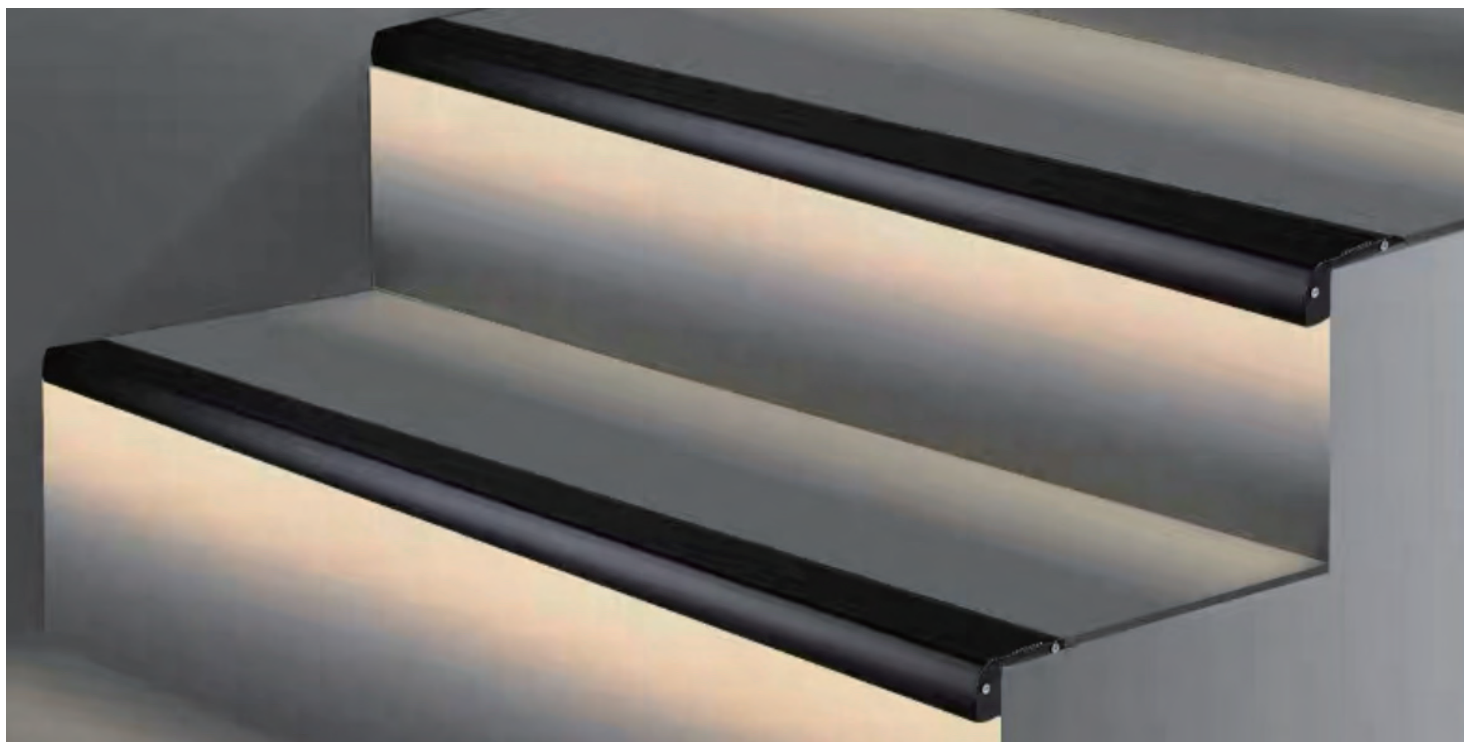

ALP024-R

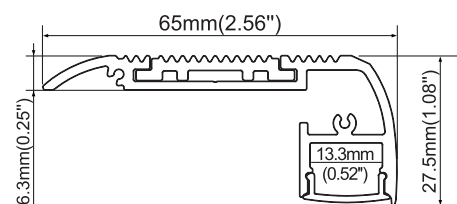

Types of installation:




Material: Extruded aluminum
Dimension: 65×27.5mm
Length: MAX 5m


ACCESSORIES



Aluminum end cap
with hole/without hole



PC diffused cover



PVC anti-skid



IP20



FINISH



Anod. aluminum





white



Black

ALP024-R1

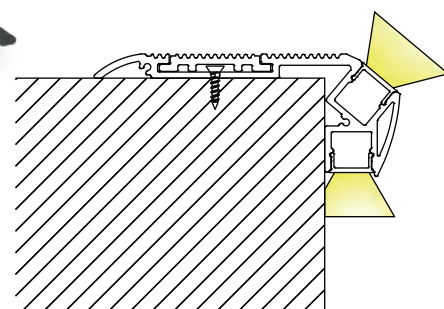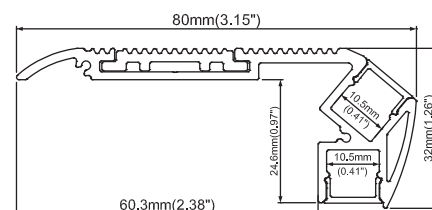

Types of installation:



Material: Extruded aluminum

Dimension: 80×32mm

Length: MAX 5m



IP20



FINISH



Anod. aluminum



white



Black


ACCESSORIES



Aluminum end cap
with hole/without hole



PC diffused cover




PVC anti-skid




Types of installation:



Material: Extruded aluminum
Dimension: 40.1×22mm
Length: MAX 5m
Compatible with 10mm tile



ALP184-9

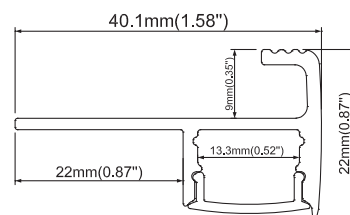

FINISH



Anod. aluminum




Black

ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover




Types of installation:



Material: Extruded aluminum
Dimension: 40.1×24mm
Length: MAX 5m
Compatible with 12mm tile

ALP184-11

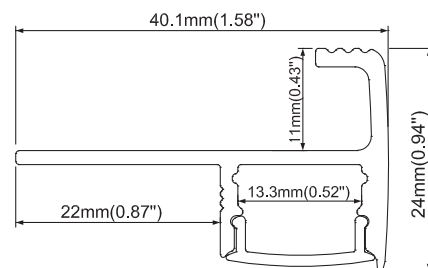

FINISH



Anod. aluminum




Black

ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover

Types of installation:




Material: Extruded aluminum

Dimension: 15×80mm

Length: MAX 5m

SK1580

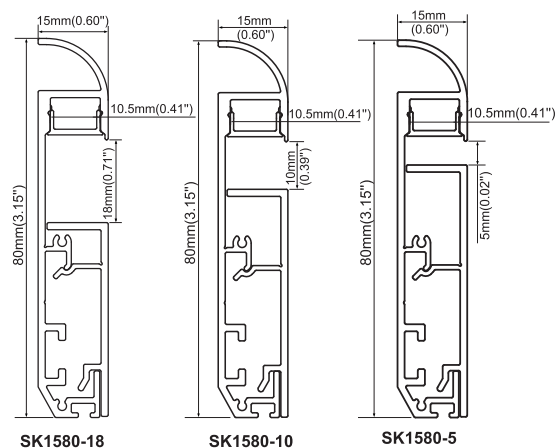

FINISH



Anod. aluminum



white




Black


ACCESSORIES



Aluminum end cap
without hole



PC diffused cover

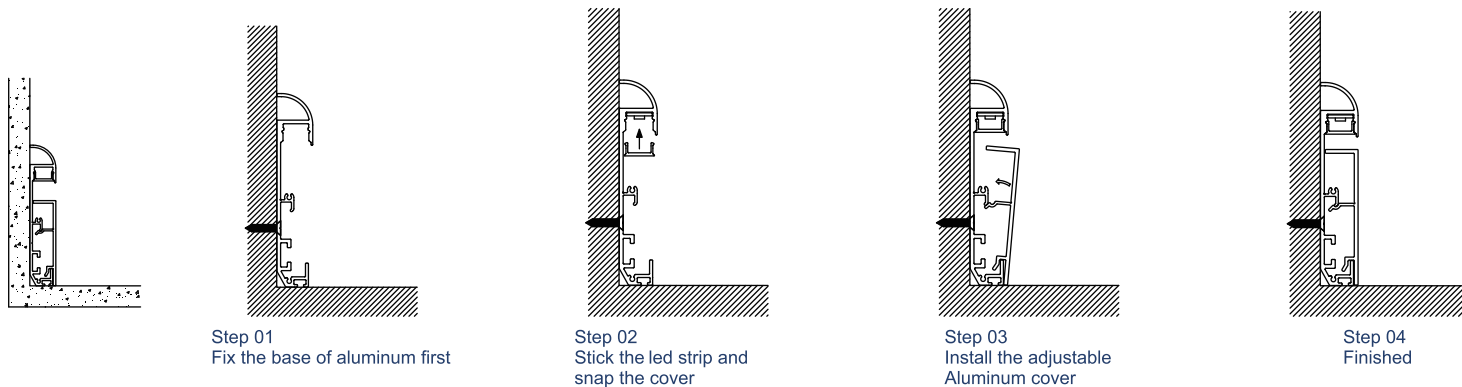


Types of installation:



Material: Extruded aluminum
Dimension: 13.5×84mm
Length: MAX 5m
Compatible with 12.5mm drywall

SK1580-TR

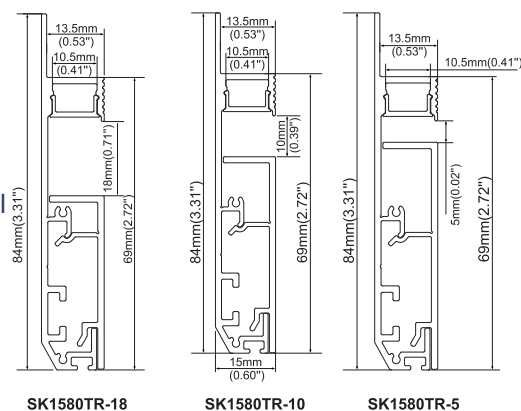

FINISH



Anod. aluminum



white




Black



ACCESSORIES




Aluminum end cap
with hole/without hole




PC diffused cover

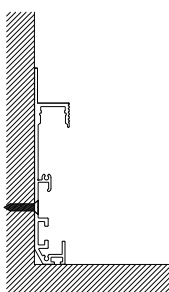


Step 01
Fix the Aluminum
base first

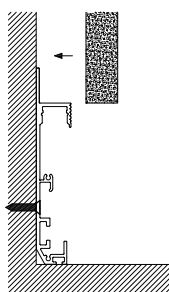


Step 02
Fix the drywall

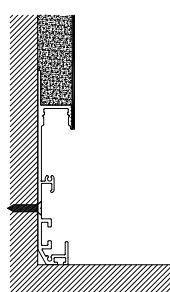


Step 03
Paint the drywall

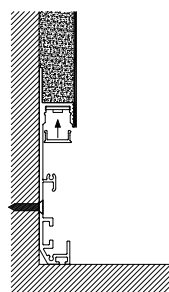


Step 04
Stick the led strip
and snap the cover

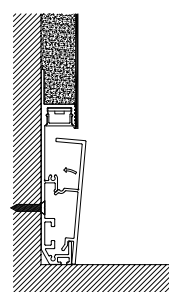

Step 05
Install the adjustable
aluminum cover



Step 06
Finished

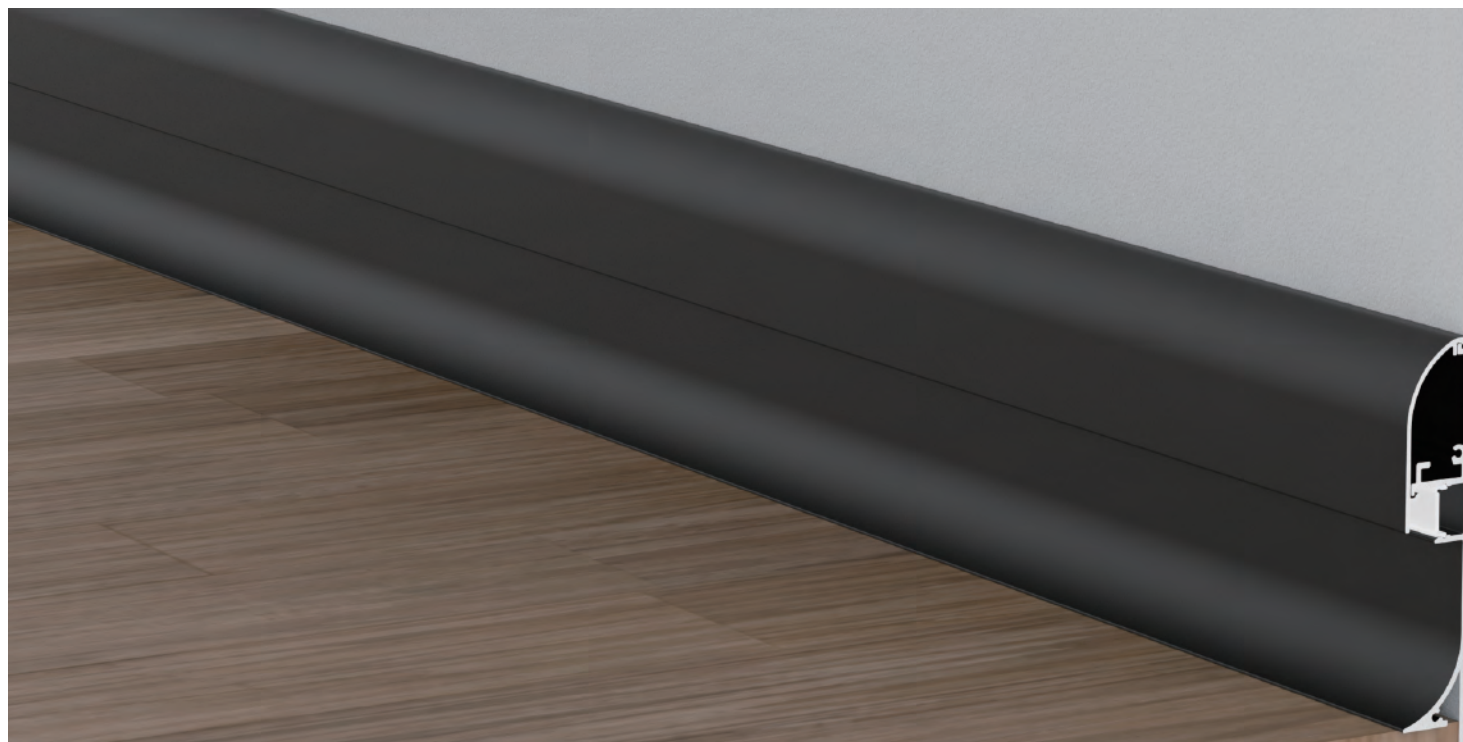

SK1580-R




Types of installation:



Material: Extruded aluminum

Dimension: 15.2×80mm

Length: MAX 5m

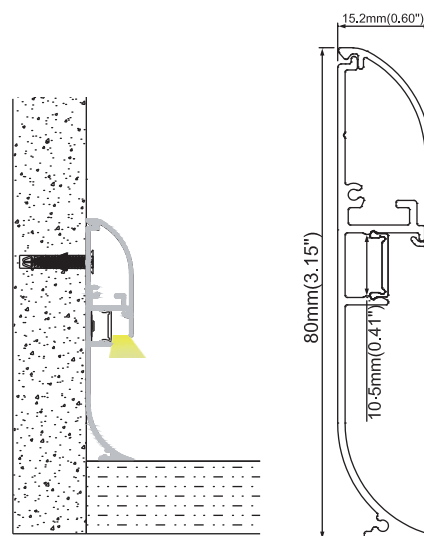

ACCESSORIES



Aluminum end cap
without hole



FINISH



Anod. aluminum



white




Black



PC diffused cover





90° Outside connector
90° Inside connector

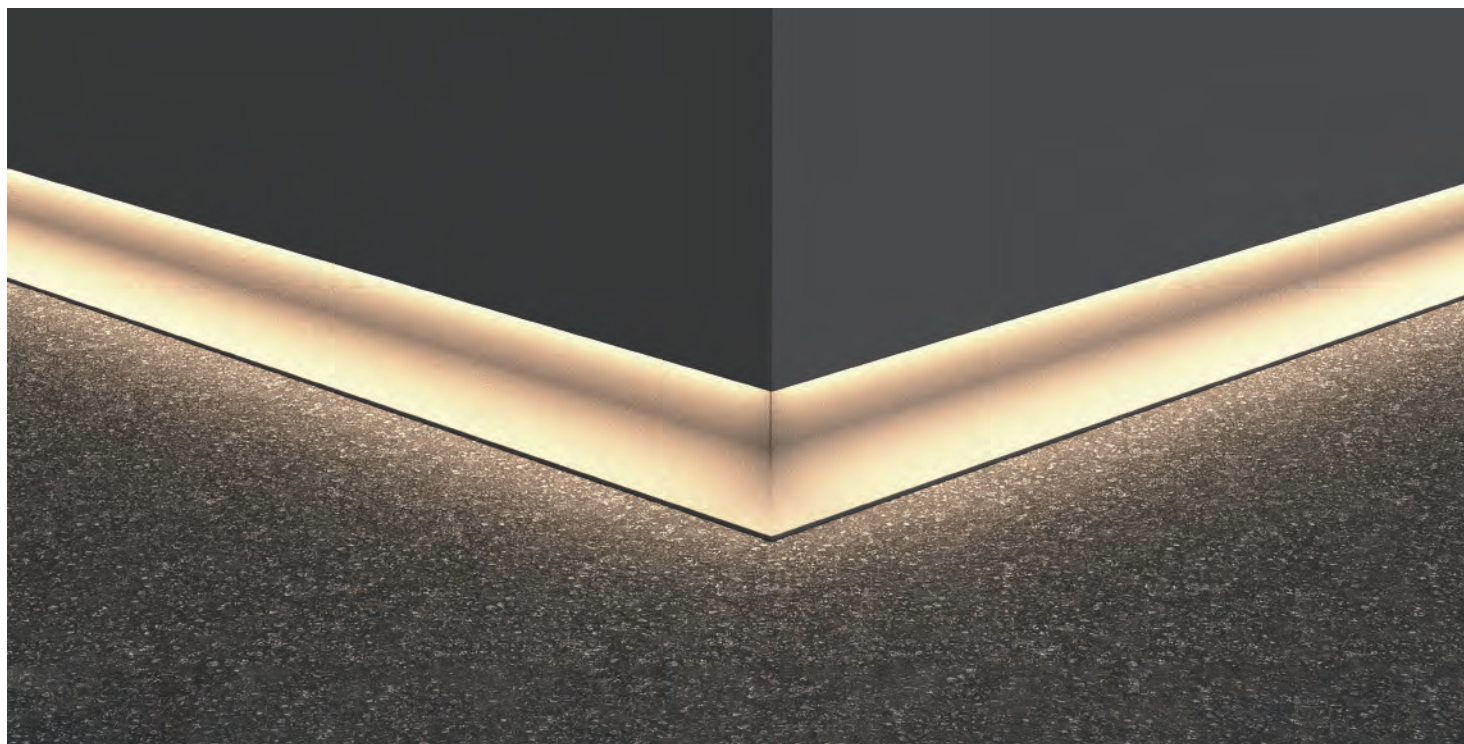

Types of installation:



Material: Extruded aluminum
Dimension: 14×70mm
Length: MAX 5m
Compatible with 12.5mm drywall

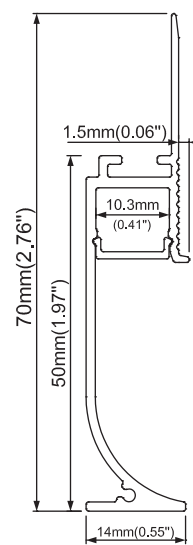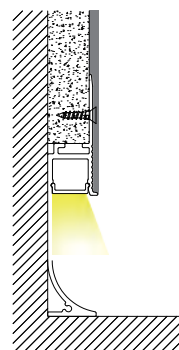

SK1270

ACCESSORIES



Plastic end cap
with hole/without hole



FINISH



PC diffused cover



180° Connector
90° Horizontal connector





Types of installation:



Material: Extruded aluminum
Dimension: 27.06×11mm
Length: MAX 5m

ALP033

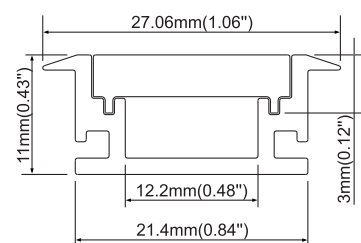

ACCESSORIES



Plastic end cap
with hole/without hole



IP20



FINISH



Anod. aluminum



white



Black



PC diffused cover




Mounting clip (metal)




Types of installation:



Material: Extruded aluminum
Dimension: 21.3×26.1mm
Length: MAX 5m



ALP034

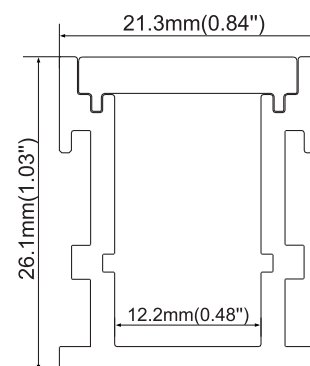

FINISH



Anod. aluminum



white



Black


ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover

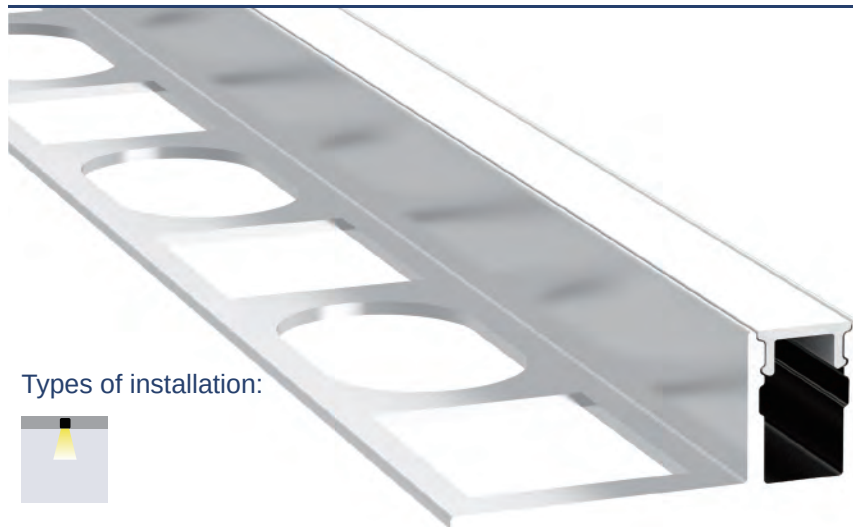


Types of installation:



Material: Extruded aluminum
Dimension: 27.8×11mm
Length: MAX 5m
Compatible with 10mm tile



ALP130

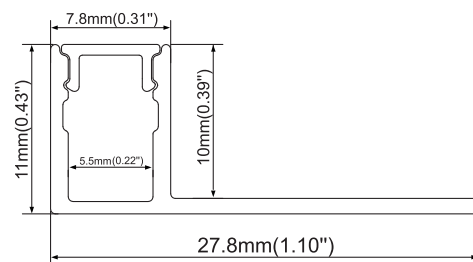


FINISH



ACCESSORIES



Plastic end cap
with hole/without hole



PC frosted cover
Black PC frosted cover




Types of installation:



Material: Extruded aluminum
Dimension: 22×13mm
Length: MAX 5m



ALP131



FINISH



ACCESSORIES





Plastic end cap
with hole/without hole



PC diffused cover

ALP132

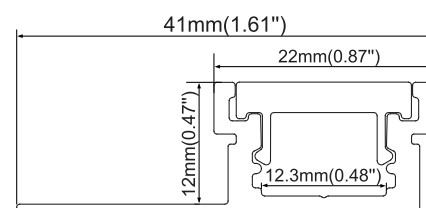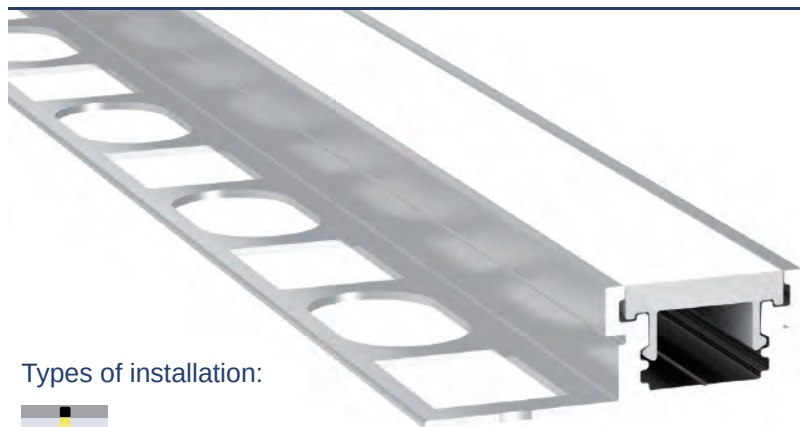

Types of installation:




Material: Extruded aluminum
Dimension: 41×12mm
Length: MAX 5m
Compatible with 12mm tile



FINISH



ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover




Types of installation:



Material: Extruded aluminum
Dimension: 62×10mm
Length: MAX 5m
Compatible with 12.5mm drywall


ALP133

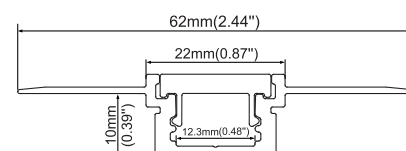

FINISH



ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover



ALP204

Types of installation:



Material: Extruded aluminum
Dimension: 69.3×68mm
Length: MAX 5m





IP20



FINISH




Anod. aluminum

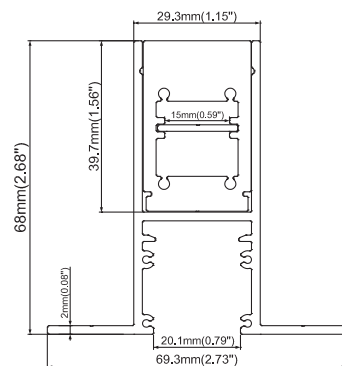


ACCESSORIES



Aluminum end caps
Plastic end caps
Silicone gasket




Antifouling cover
Aluminum PCB tray





Aluminum profile



Mounting clip (metal)
Waterproof cable grommet

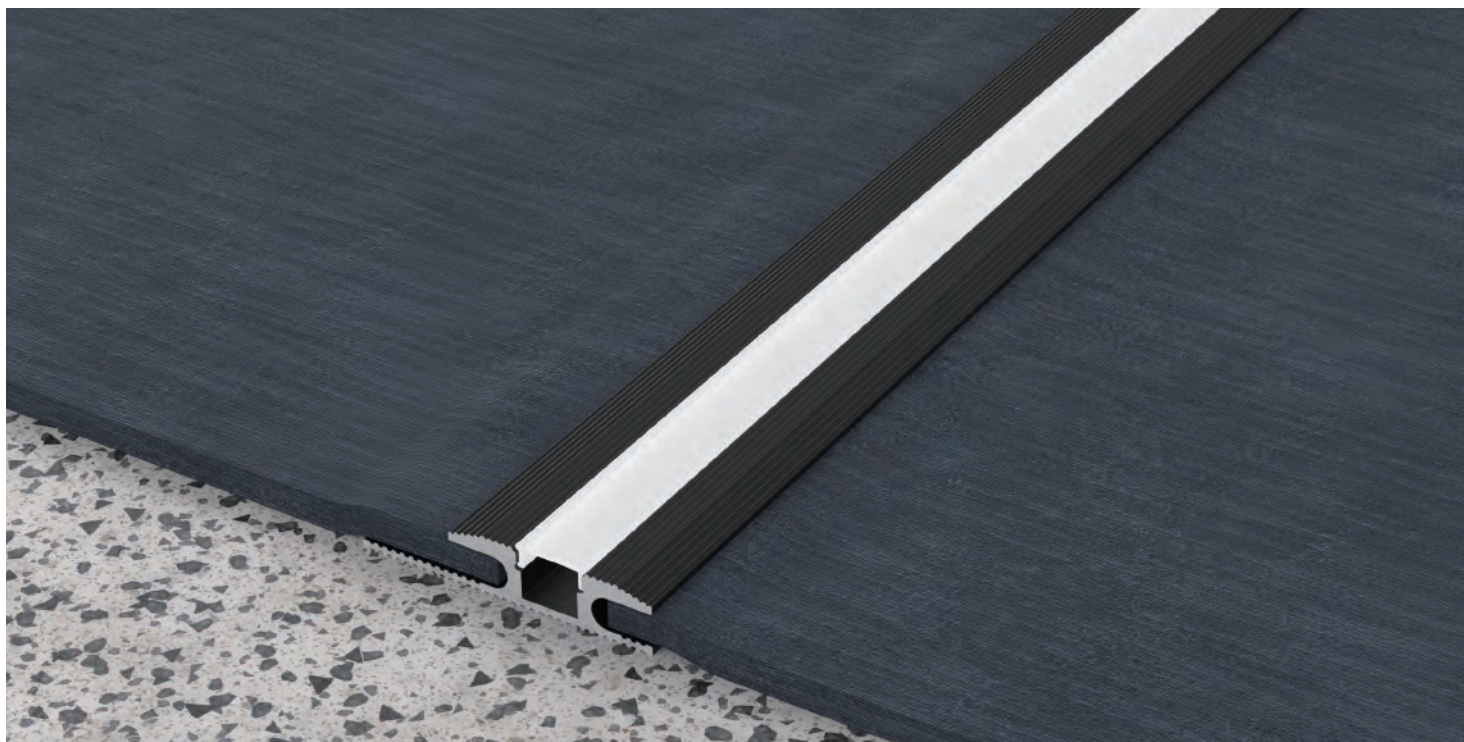

ALP207

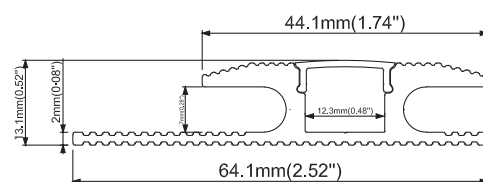

Types of installation:



Material: Extruded aluminum

Dimension: 64.1×13.1mm

Length: MAX 5m


ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover




Black PC frosted cover





FINISH



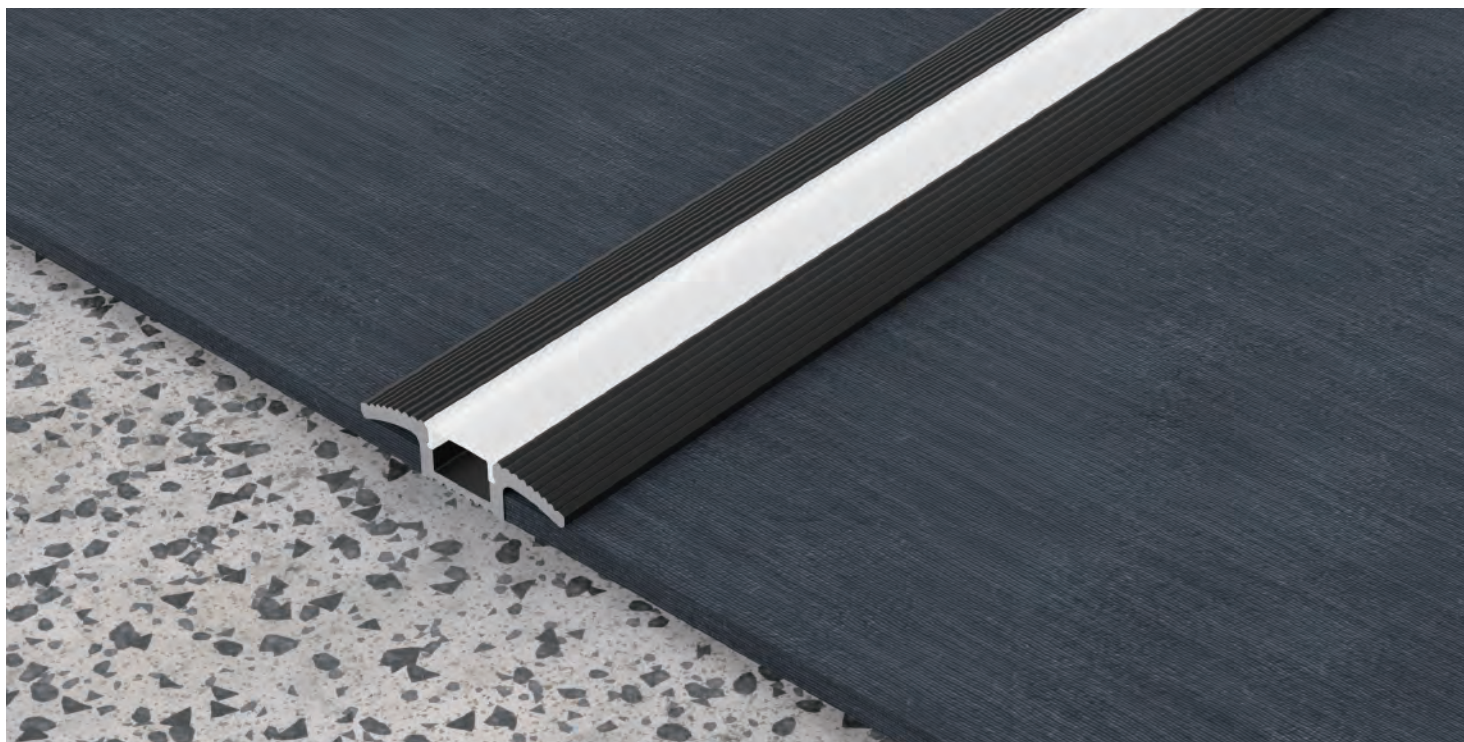

ALP208

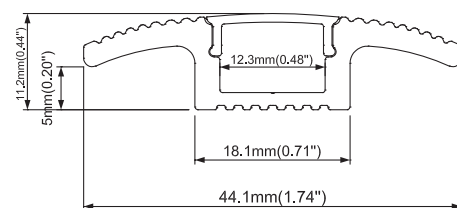

Types of installation:



Material: Extruded aluminum

Dimension: 44.1×11.2mm

Length: MAX 5m



IP20



FINISH



Anod. aluminum



Black


ACCESSORIES



Plastic end cap
with hole/without hole





PC diffused cover



Black PC frosted cover



ALP209

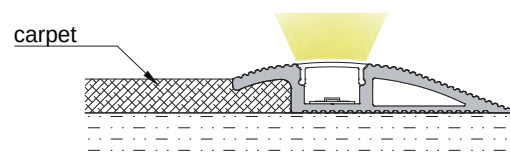

Types of installation:



Material: Extruded aluminum

Dimension: 62.2×11.2mm

Length: MAX 5m


ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover



Black PC frosted cover




FINISH



Anod. aluminum



Black

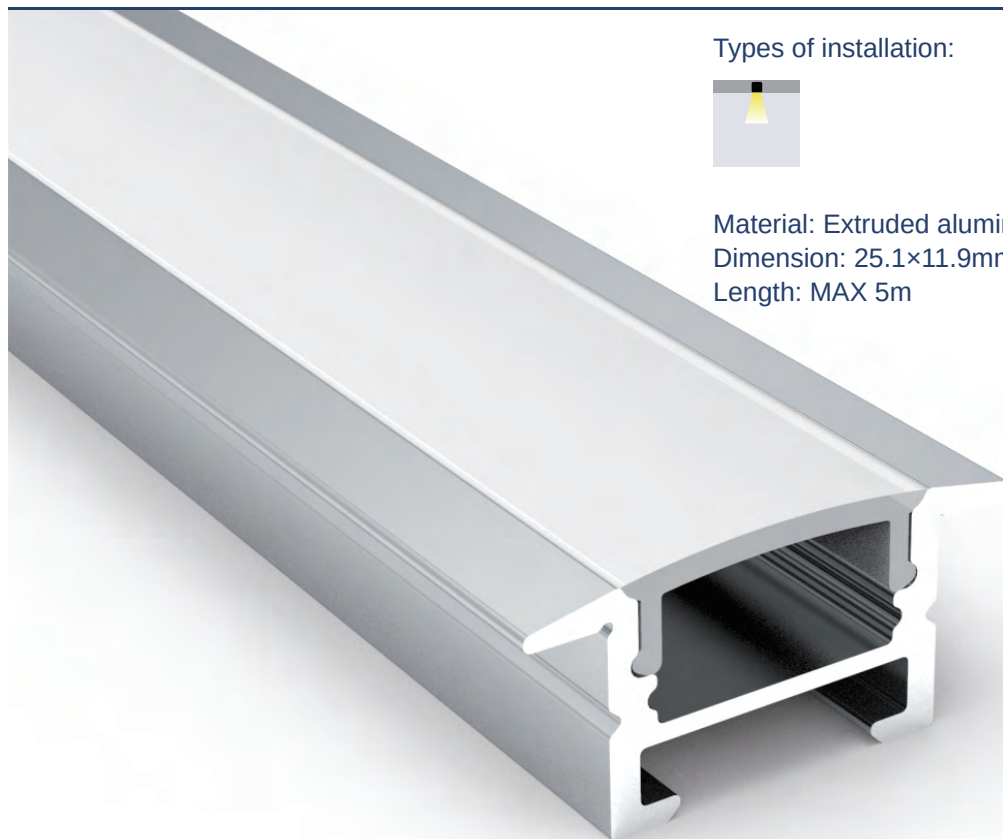

Types of installation:





Material: Extruded aluminum

Dimension: 25.1×11.9mm

Length: MAX 5m

ALP143

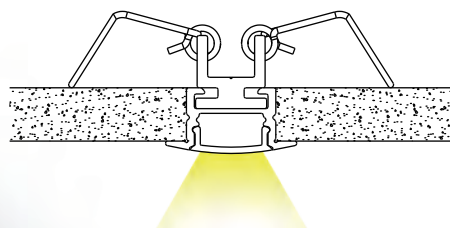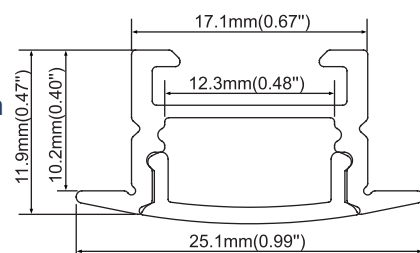



ACCESSORIES




Plastic end cap
with hole/without hole



FINISH



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



Black PC frosted cover



Spring clip



180° Connector
90° Vertical connector
90° Horizontal connector



135° Vertical connector
135° Horizontal connector





Types of installation:



Material: Extruded aluminum
Dimension: 17.1×11.9mm
Length: MAX 5m

ALP144

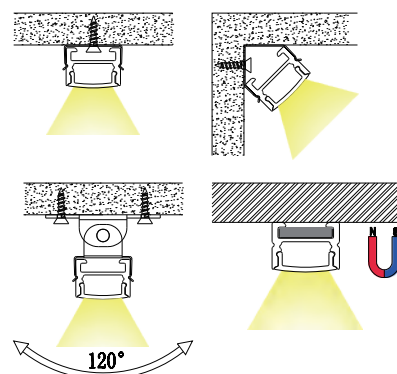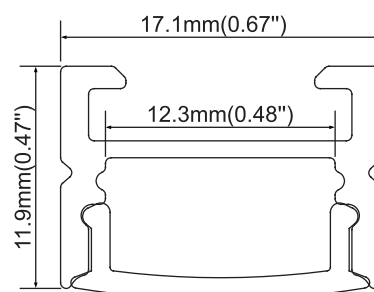

ACCESSORIES




Plastic end cap
with hole/without hole




FINISH



Anod. aluminum white Black



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



Black PC frosted cover



Magnet
45° Mounting clip
Adjustable bracket
Mounting clip (metal)





180° Connector
90° Vertical connector
90° Horizontal connector



135° Vertical connector
135° Horizontal connector

ALP145

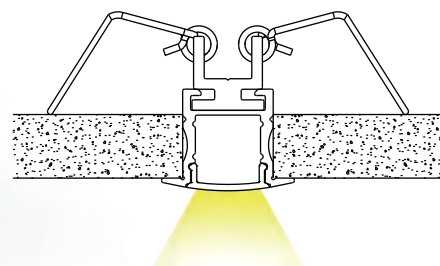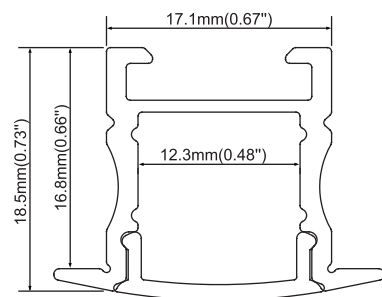

Types of installation:



Material: Extruded aluminum
Dimension: 17.1×18.5mm
Length: MAX 5m


ACCESSORIES




Plastic end cap
with hole/without hole



FINISH



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



Black PC frosted cover



Spring clip



180° Connector
90° Vertical connector
90° Horizontal connector



135° Vertical connector
135° Horizontal connector



Types of installation:





Material: Extruded aluminum

Dimension: 17.1×18.5mm

Length: MAX 5m

ALP146

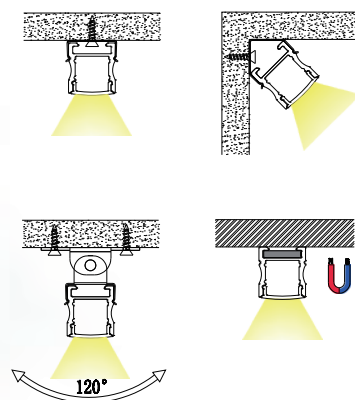


ACCESSORIES




Plastic end cap
with hole/without hole



FINISH



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



Black PC frosted cover



Magnet
45° Mounting clip
Adjustable bracket
Mounting clip (metal)



180° Connector
90° Vertical connector
90° Horizontal connector



135° Vertical connector
135° Horizontal connector




Types of installation:



Material: Extruded aluminum
Dimension: 18.5×7mm
Length: MAX 5m

ALP147

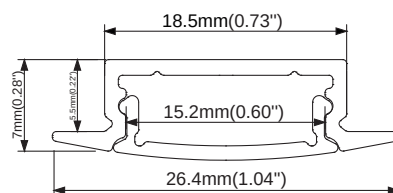

ACCESSORIES




Plastic end cap
with hole/without hole



PC diffused cover
PC semi-clear cover
PC clear cover



PC opal prismatic cover
PC clear prismatic cover



Black PC frosted cover



IP20



FINISH




Anod. aluminum



white



Black

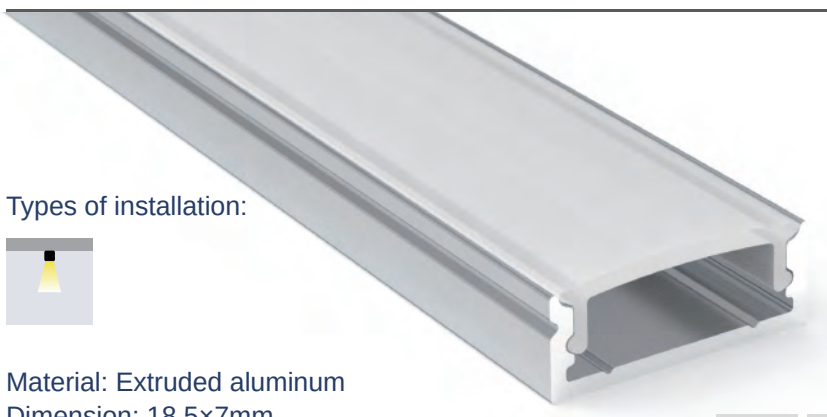


Types of installation:



Material: Extruded aluminum
Dimension: 18.5×7mm
Length: MAX 5m

ALP148

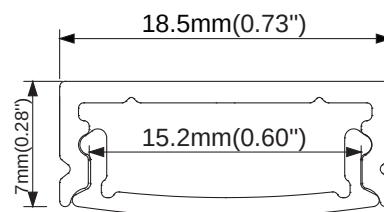

FINISH



Anod. aluminum



white



Black

ACCESSORIES



Plastic end cap
with hole/without hole




PC diffused cover
PC semi-clear cover
PC clear cover



PC opal prismatic cover
PC clear prismatic cover



Adjustable bracket
Mounting clip (metal)
45° Mounting clip

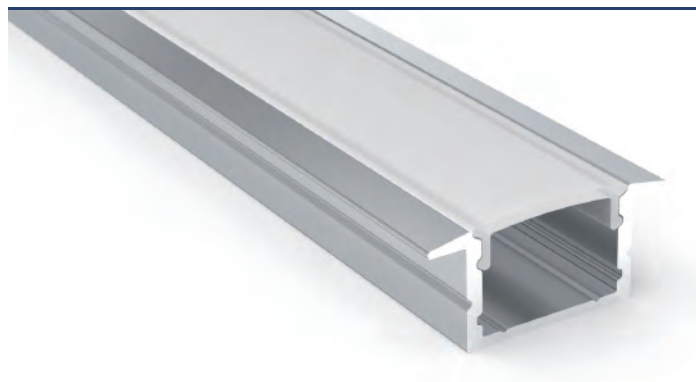


Types of installation:



Material: Extruded aluminum
Dimension: 18.5×12mm
Length: MAX 5m

ALP149

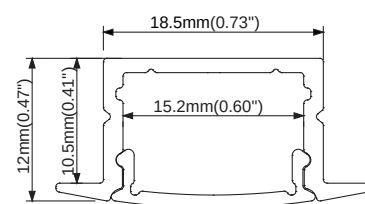

FINISH



Anod. aluminum



white



Black

ACCESSORIES




Plastic end cap
with hole/without hole



PC diffused cover
PC semi-clear cover
PC clear cover



PC opal prismatic cover
PC clear prismatic cover



Black PC frosted cover




Types of installation:



Material: Extruded aluminum
Dimension: 18.5×11.8mm
Length: MAX 5m

ALP150



FINISH



Anod. aluminum



white



Black

ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover
PC semi-clear cover
PC clear cover





PC opal prismatic cover
PC clear prismatic cover



Adjustable bracket
Mounting clip (metal)
45° Mounting clip

ALP151

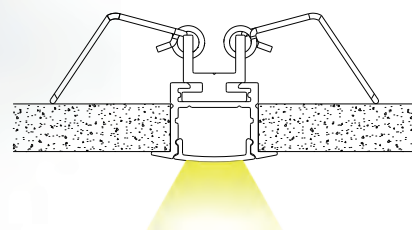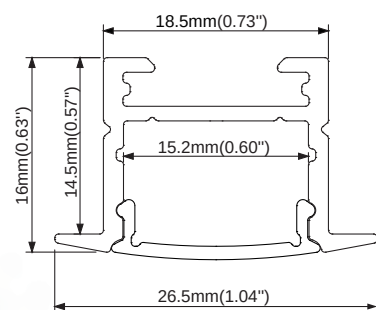

Types of installation:



Material: Extruded aluminum
Dimension: 18.5×16mm
Length: MAX 5m



FINISH



ACCESSORIES




Plastic end cap
with hole/without hole



PC diffused cover
PC semi-clear cover
PC clear cover



PC opal prismatic cover
PC clear prismatic cover



Black PC frosted cover



Spring clip



180° Connector
90° Vertical connector
90° Horizontal connector



135° Vertical connector
135° Horizontal connector

ALP152

Types of installation:



Material: Extruded aluminum

Dimension: 18.5×16mm

Length: MAX 5m

ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover
PC semi-clear cover
PC clear cover




PC opal prismatic cover
PC clear prismatic cover




Magnet



180° Connector
90° Vertical connector
90° Horizontal connector





Black PC frosted cover



Adjustable bracket
Mounting clip (metal)
45° Mounting clip



135° Vertical connector
135° Horizontal connector

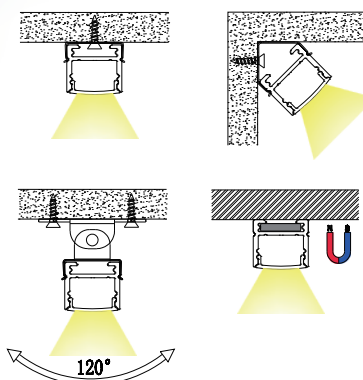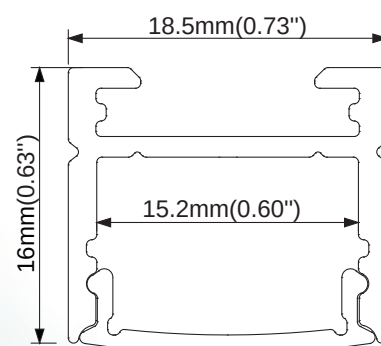

FINISH



Anod. aluminum

white

Black


Types of installation:



Material: Extruded aluminum
Dimension: 64.1×13.6mm
Length: MAX 5m
Compatible with 12.5mm drywall



ALP155

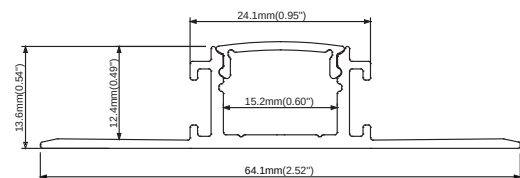

FINISH



ACCESSORIES




Plastic end cap
with hole/without hole



PC diffused cover
PC semi-clear cover
PC clear cover



PC opal prismatic cover
PC clear prismatic cover



Black PC frosted cover



180° Connector
90° Vertical connector
90° Horizontal connector



Types of installation:



Material: Extruded aluminum
Dimension: 69.4×13mm
Length: MAX 5m
Compatible with 12.5mm drywall



ALP156



FINISH



ACCESSORIES



Aluminum end cap
with hole/without hole



PC diffused cover
Black PC frosted cover



180° Connector
90° Vertical connector
90° Horizontal connector


Types of installation:




Material: Extruded aluminum

Dimension: 20.9×37mm

Length: MAX 5m

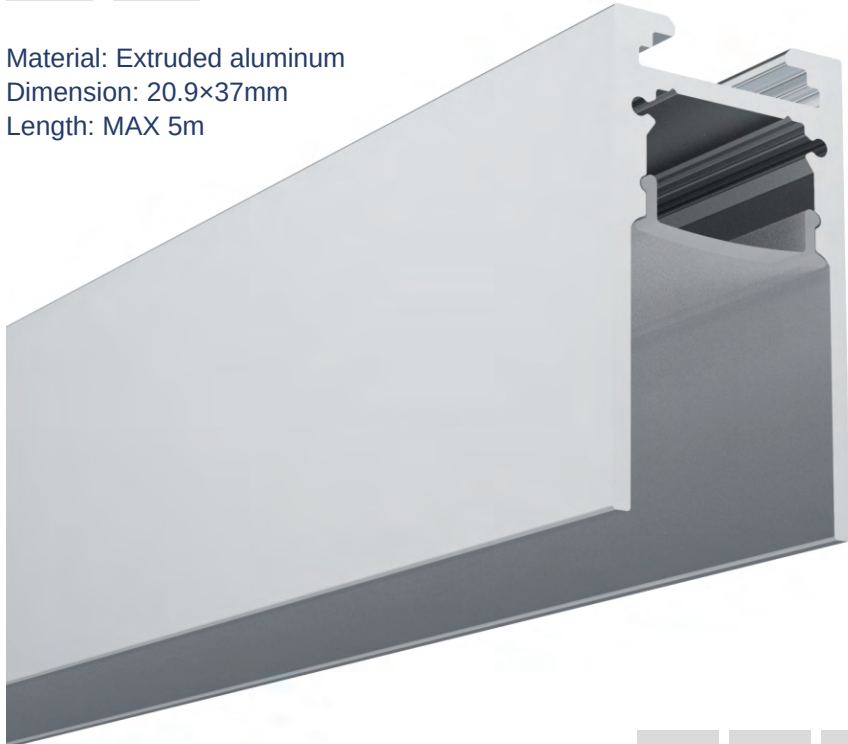

ALP157

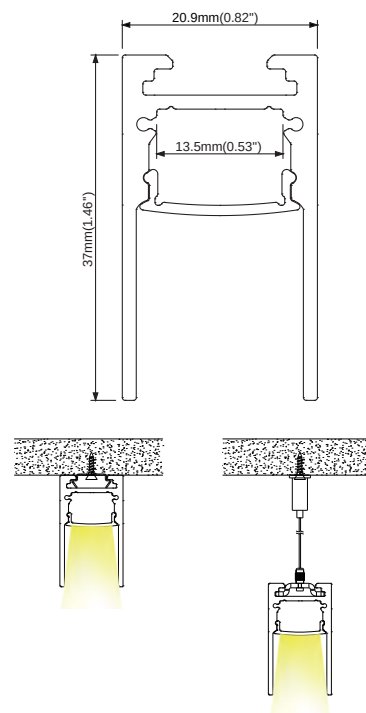

FINISH



Anod. aluminum



white



Black

ACCESSORIES



IP20




Aluminum end cap
without hole



PC diffused cover
PC semi-clear cover
PC clear cover



PC opal prismatic cover
PC clear prismatic cover

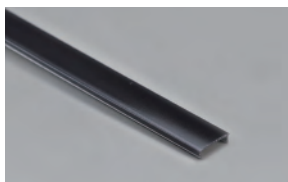

Black PC frosted cover



Mounting clip(metal)



Hanging bracket




Steel wire



180° Connector
90° Vertical connector
90° Horizontal connector



ALP158

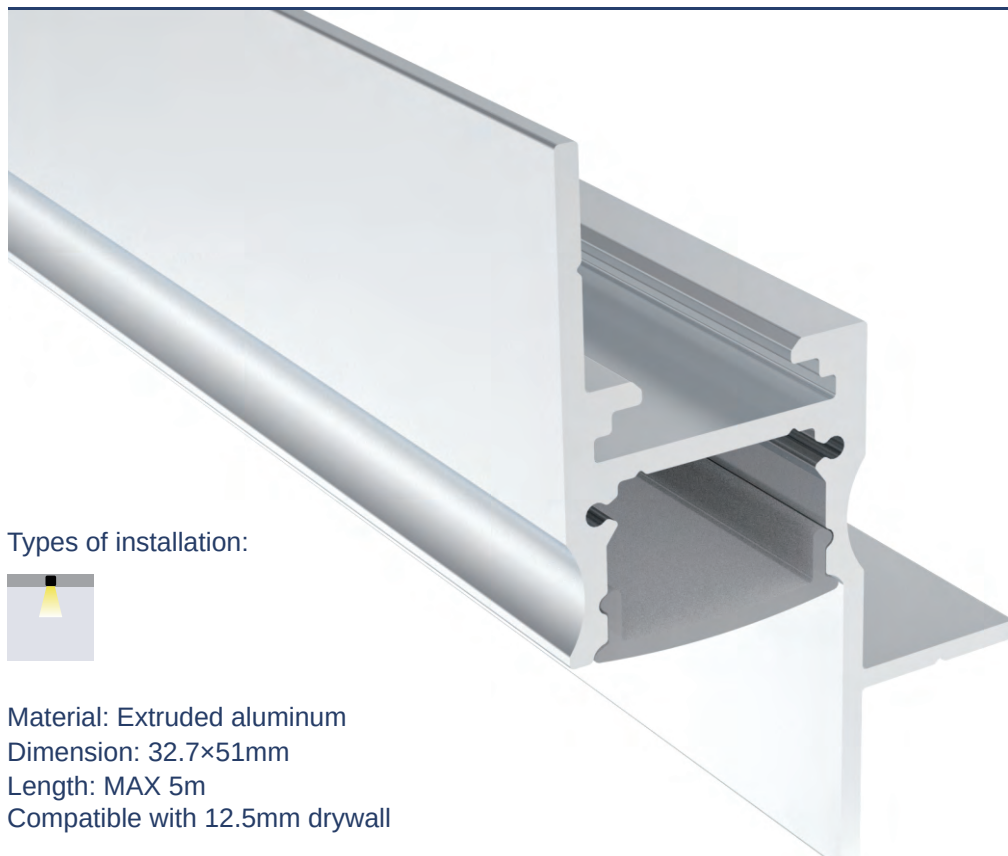

Types of installation:



Material: Extruded aluminum
Dimension: 32.7×51mm
Length: MAX 5m
Compatible with 12.5mm drywall

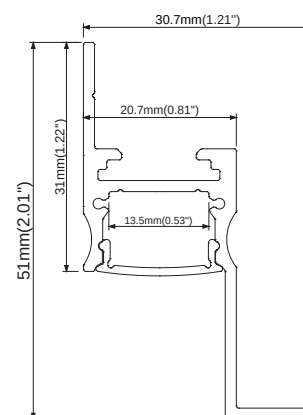

ACCESSORIES



Aluminum end cap
with hole/without hole



FINISH




Anod. aluminum white Black



PC diffused cover
PC semi-clear cover
PC clear cover




PC opal prismatic cover
PC clear prismatic cover



Black PC frosted cover



180° Connector
90° Vertical connector
90° Horizontal connector

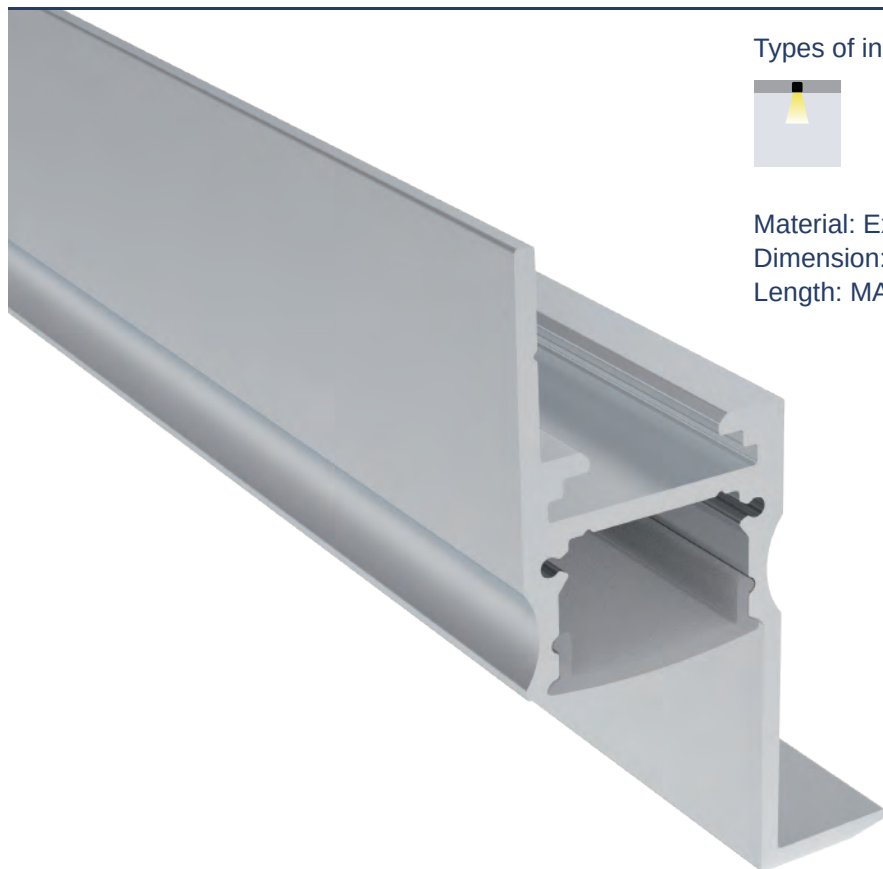

Types of installation:





Material: Extruded aluminum

Dimension: 46×76.5mm

Length: MAX 5m

ALP159

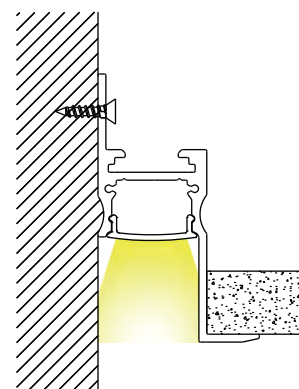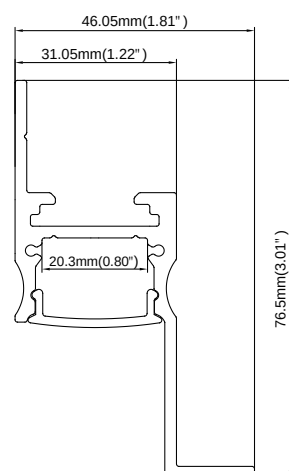

ACCESSORIES




Aluminum end cap
with hole/without hole



PC diffused cover
PC semi-clear cover
PC clear cover



PC opal prismatic cover
PC clear prismatic cover



Black PC frosted cover



FINISH



Anod. aluminum

white

Black




180° Connector
90° Vertical connector
90° Horizontal connector




Types of installation:



Material: Extruded aluminum
Dimension: 40.7×51mm
Length: MAX 5m



ALP159-TR

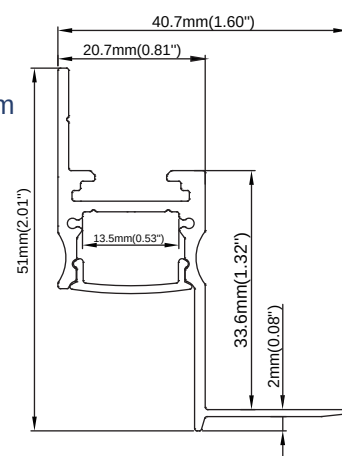

FINISH



Anod. aluminum



white



Black

ACCESSORIES



Aluminum end cap
with hole/without hole



PC diffused cover
PC semi-clear cover
PC clear cover



PC opal prismatic cover
PC clear prismatic cover



180° Connector
90° Vertical connector
90° Horizontal connector



ACCESSORIES



Aluminum end cap
with hole/without hole



PC opal prismatic cover
PC clear prismatic cover

Types of installation:



Material: Extruded aluminum
Dimension: 42.2×48.1mm
Length: MAX 5m

FINISH



Anod. aluminum





white



Black

ALP159-TR1



PC diffused cover
PC semi-clear cover
PC clear cover



180° Connector
90° Vertical connector
90° Horizontal connector



ACCESSORIES



Aluminum end cap
with hole/without hole



PC opal prismatic cover
PC clear prismatic cover

Types of installation:



Material: Extruded aluminum
Dimension: 42.2×48.1mm
Length: MAX 5m

FINISH



Anod. aluminum




white



Black

ALP159-TR2

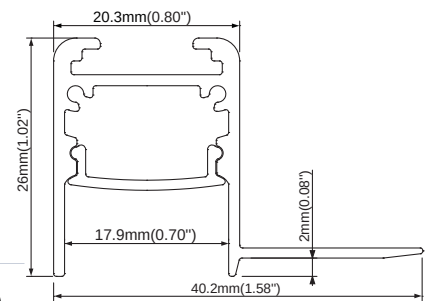

PC diffused cover
PC semi-clear cover
PC clear cover



180° Connector
90° Vertical connector
90° Horizontal connector



Types of installation:





Material: Extruded aluminum

Dimension: 35.9×37mm

Length: MAX 5m

ALP160

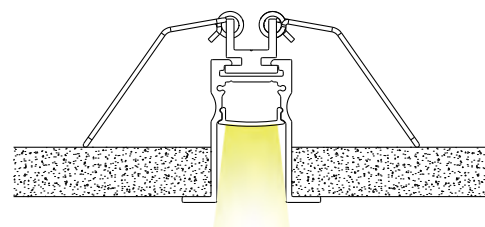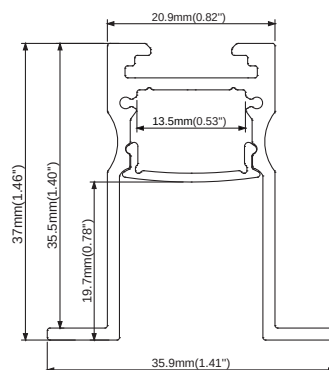

ACCESSORIES




Aluminum end cap
with hole/without hole



PC diffused cover
PC semi-clear cover
PC clear cover



PC opal prismatic cover
PC clear prismatic cover



Black PC frosted cover



FINISH




Anod. aluminum

white

Black



180° Connector
90° Vertical connector
90° Horizontal connector


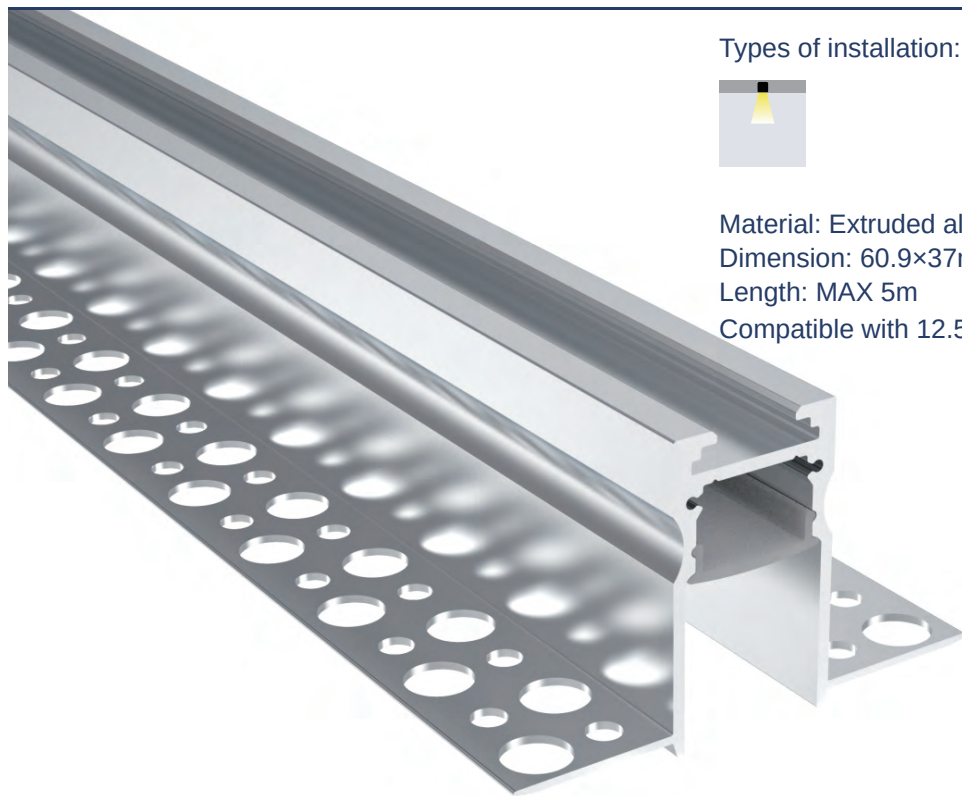


Types of installation:



Material: Extruded aluminum
Dimension: 60.9×37mm
Length: MAX 5m
Compatible with 12.5mm drywall

ALP161

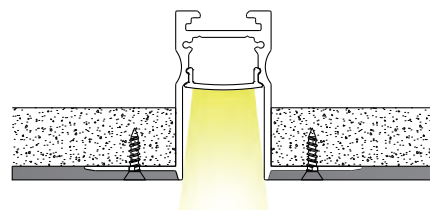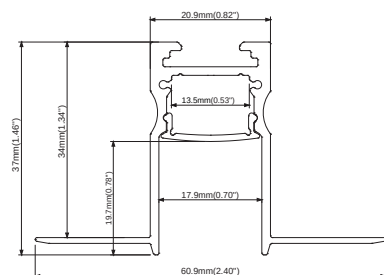

ACCESSORIES




Aluminum end cap
with hole/without hole



PC diffused cover
PC semi-clear cover
PC clear cover



PC opal prismatic cover
PC clear prismatic cover



Black PC frosted cover



FINISH



Anod. aluminum

white

Black



180° Connector
90° Vertical connector
90° Horizontal connector


Types of installation:






Material: Extruded aluminum

Dimension: 39×38mm

Length: MAX 5m

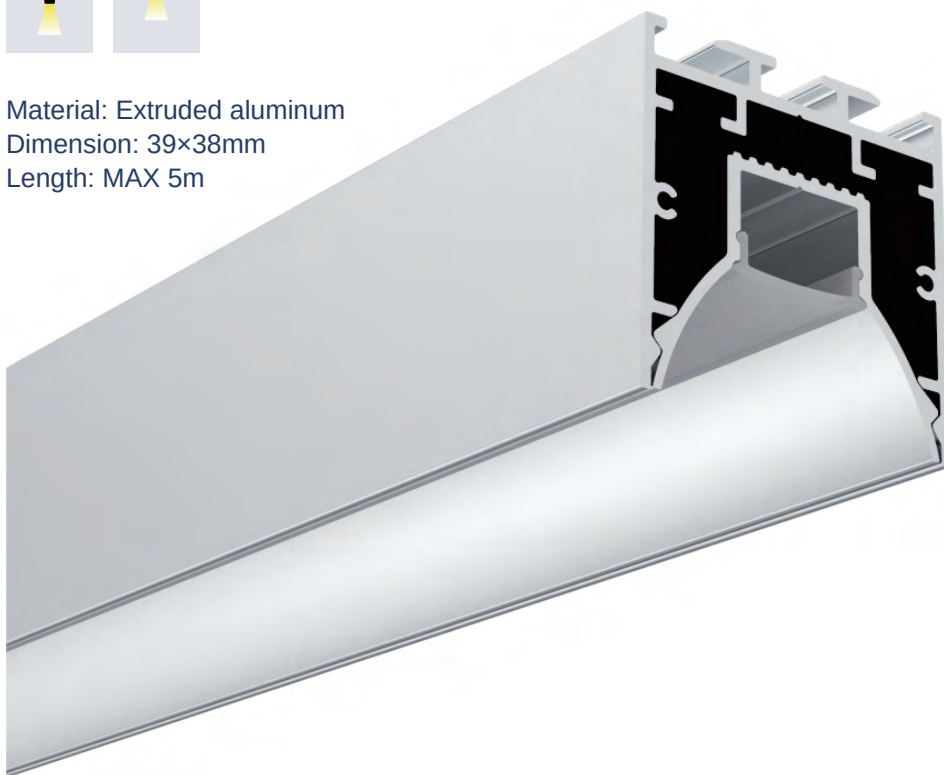

ALP162



FINISH



Anod. aluminum



white



Black

ACCESSORIES



IP20




CNC end caps



PC diffused cover
PC semi-clear cover
PC clear cover



PC opal prismatic cover
PC clear prismatic cover



Black PC frosted cover



Steel wire
Mounting clip (metal)



180° Connector
90° Vertical connector
90° Horizontal connector


Types of installation:





Material: Extruded aluminum

Dimension: 49×38mm

Length: MAX 5m

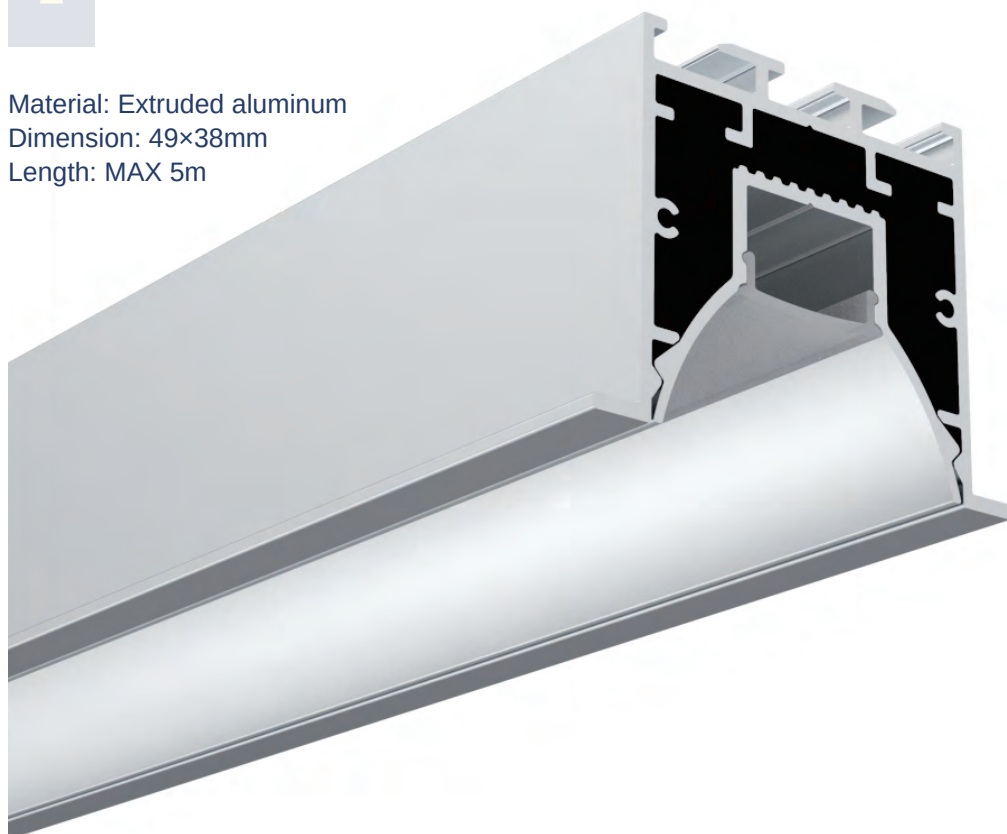

ALP163

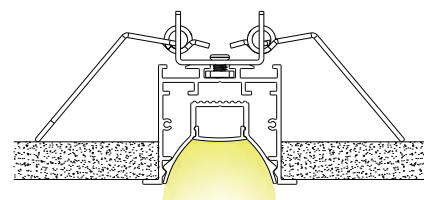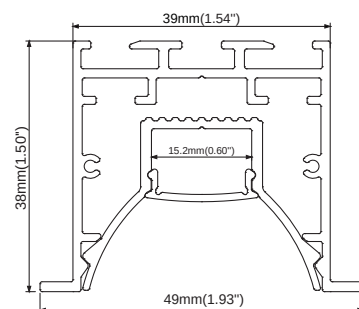

ACCESSORIES



Aluminum end cap
with hole/without hole



PC diffused cover
PC semi-clear cover
PC clear cover



PC opal prismatic cover
PC clear prismatic cover



Spring clip




FINISH



Anod. aluminum

white

Black



Black PC frosted cover



180° Connector
90° Vertical connector
90° Horizontal connector


Types of installation:





Material: Extruded aluminum

Dimension: 79×38mm

Length: MAX 5m

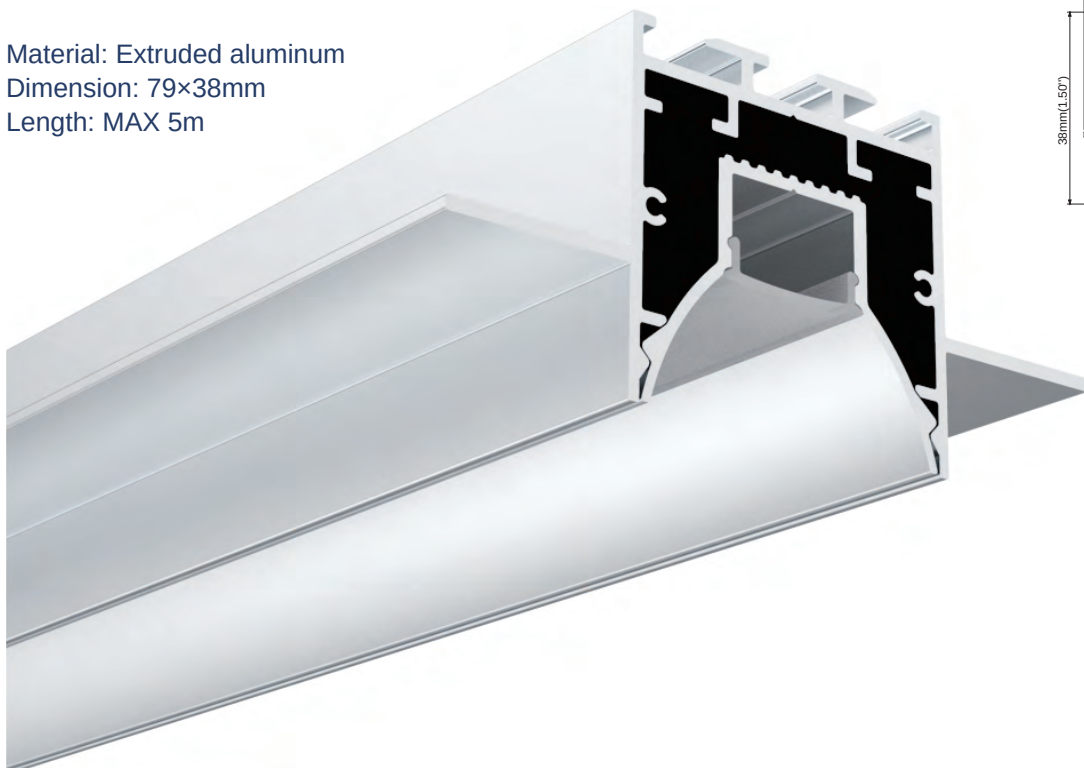

ALP164

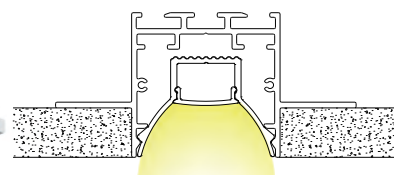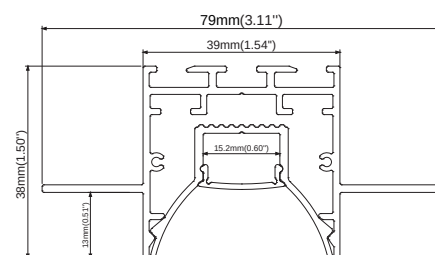

ACCESSORIES




Aluminum end cap
with hole/without hole



PC diffused cover
PC semi-clear cover
PC clear cover



PC opal prismatic cover
PC clear prismatic cover



Black PC frosted cover



FINISH



Anod. aluminum

white

Black



180° Connector
90° Vertical connector
90° Horizontal connector

Types of installation:





Material: Extruded aluminum

Dimension: 79×38mm

Length: MAX 5m



ALP165

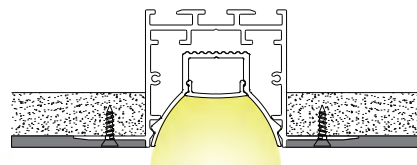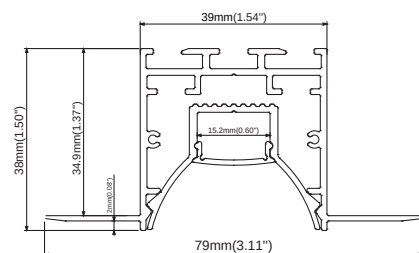

FINISH



Anod. aluminum



white




Black

ACCESSORIES



IP20




Aluminum end cap
with hole/without hole



PC diffused cover
PC semi-clear cover
PC clear cover




PC opal prismatic cover
PC clear prismatic cover



Black PC frosted cover



180° Connector
90° Vertical connector
90° Horizontal connector

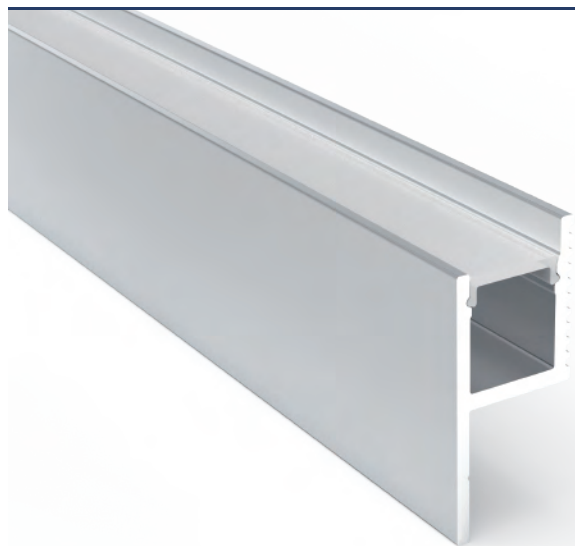

Types of installation:



Material: Extruded aluminum
Dimension: 33×14mm
Length: MAX 5m
Compatible with 12.5mm drywall

FINISH



Anod. aluminum





white




Black



ALP166

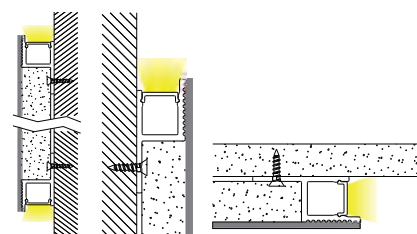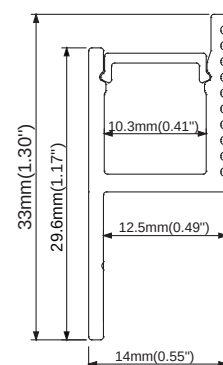

ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover



Types of installation:



Material: Extruded aluminum
Dimension: 14.2×147mm
Length: MAX 5m
Compatible with 12.5mm drywall

FINISH



Anod. aluminum





white



Black



ALP167

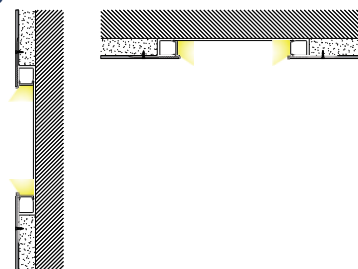

ACCESSORIES




Plastic end cap
with hole/without hole



PC diffused cover


ALP168

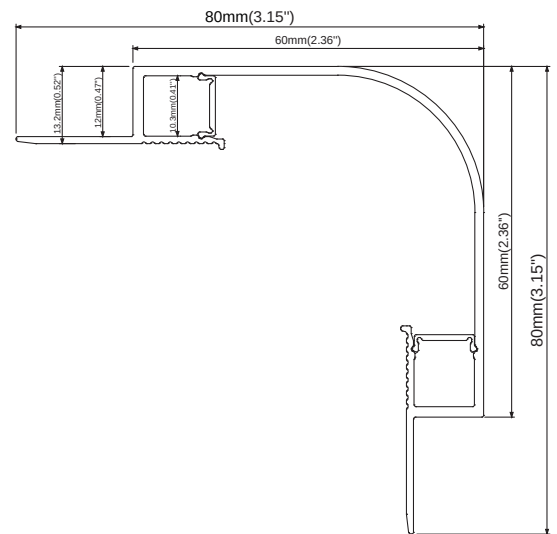

Types of installation:



Material: Extruded aluminum
Dimension: 80×80mm
Length: MAX 5m
Compatible with 12.5mm drywall

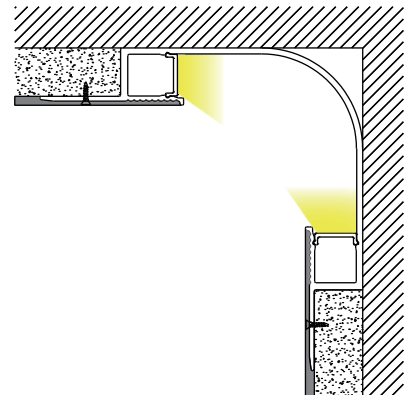

ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover



IP20



FINISH



Anod. aluminum



white




Black


Types of installation:




Material: Extruded aluminum
Dimension: 56.48×13.35mm
Length: MAX 5m
Compatible with 12.5mm drywall

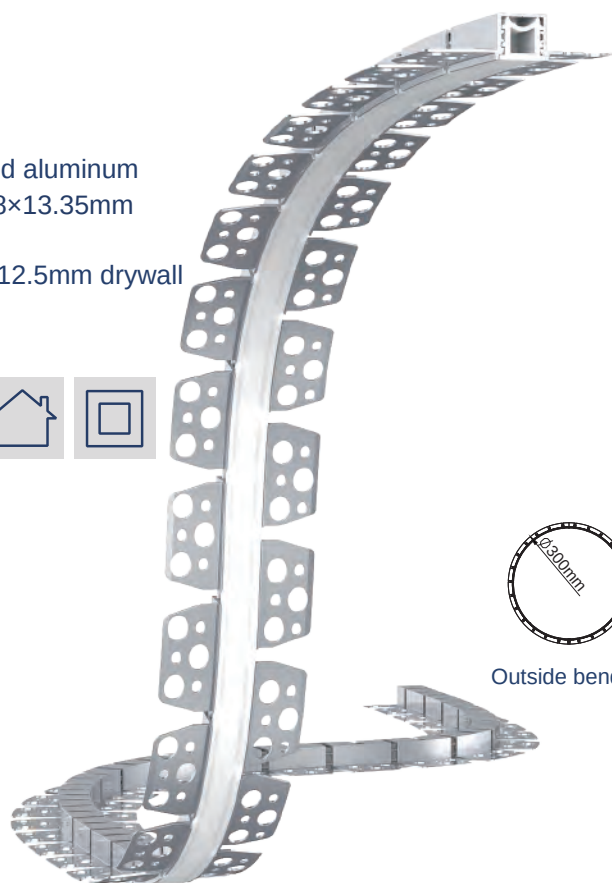


ALP213-RC

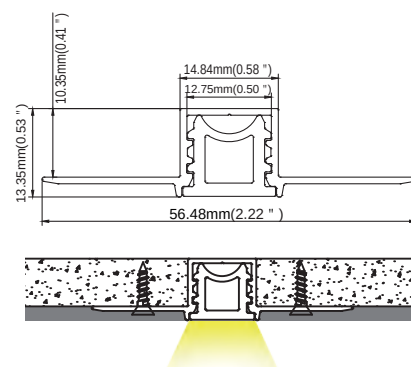

Outside bending



Inside bending

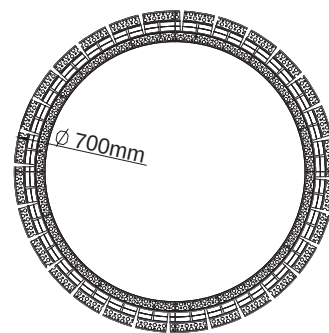

Side bending


ACCESSORIES




Plastic end cap
with hole/without hole



Silicone diffuser

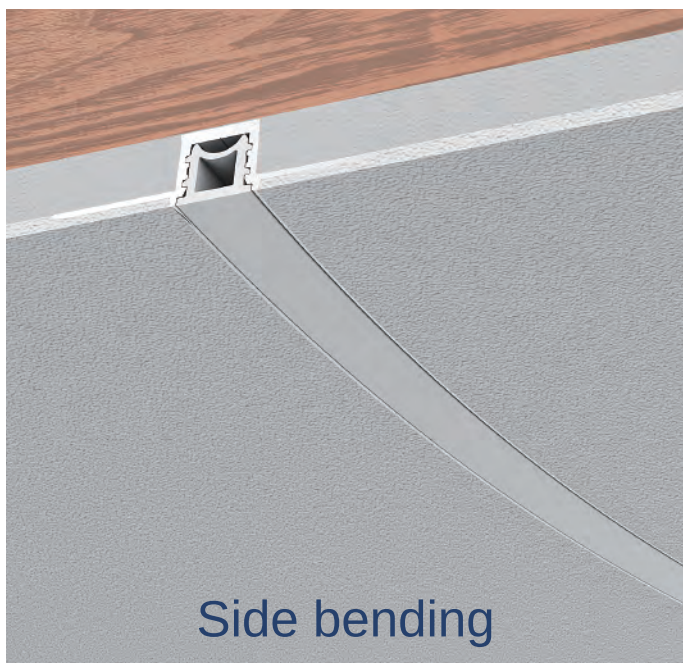

Side bending

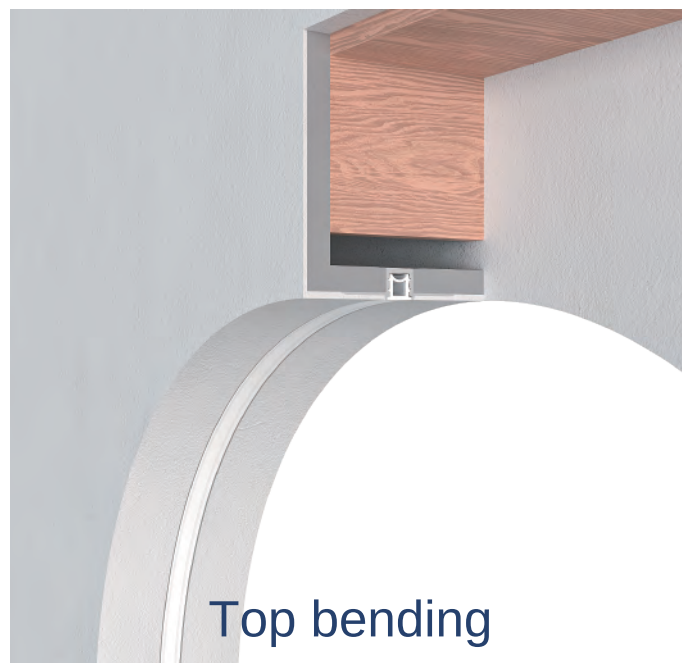


Top bending



Types of installation:




Material: Extruded aluminum
Dimension: 66.93×13.46mm
Length: MAX 5m
Compatible with 12.5mm drywall

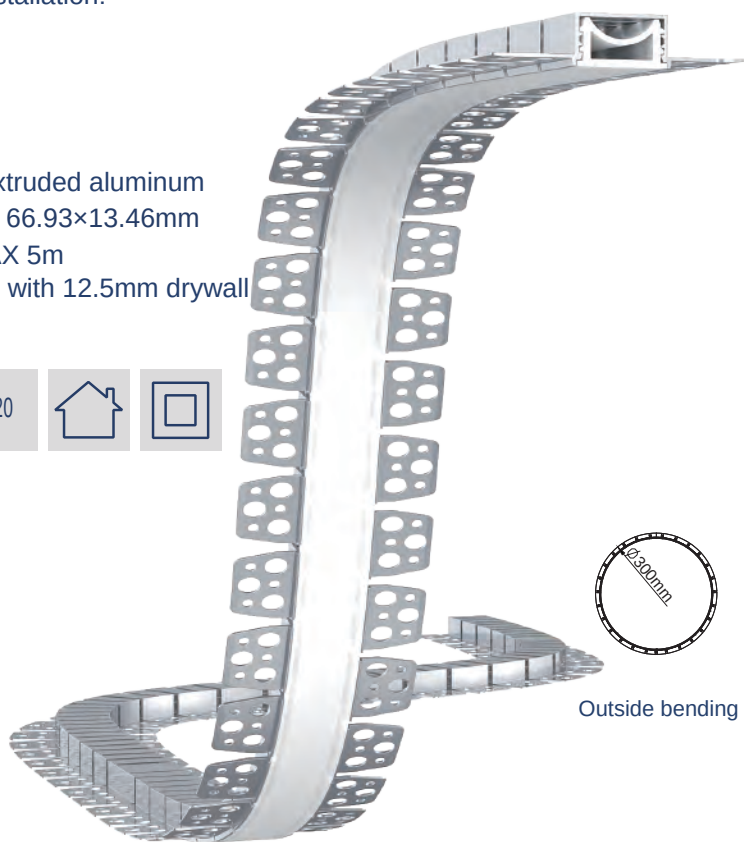


ALP215-RC

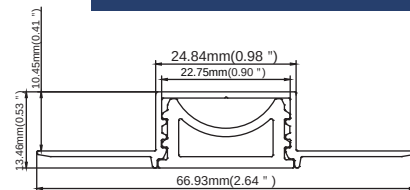

Outside bending



Inside bending

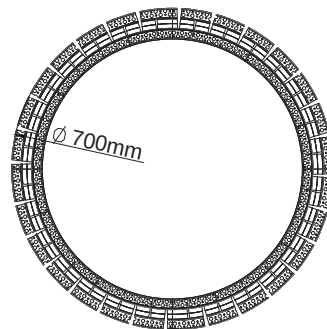

Side bending


ACCESSORIES




Plastic end cap
with hole/without hole



Silicone diffuser

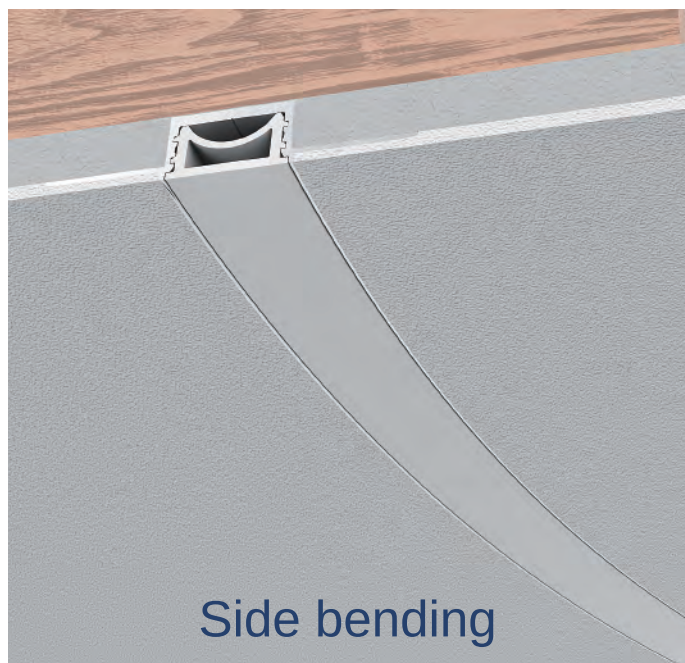

Side bending

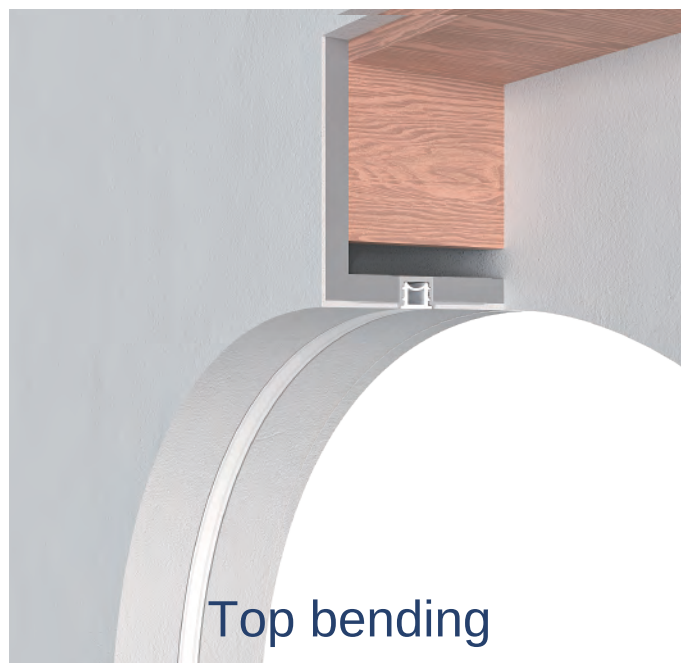

Top bending



Types of installation:



Material: Extruded aluminum
Dimension: 37.84×13.62mm
Length: MAX 5m
Compatible with 12.5mm drywall




ALP217-RC

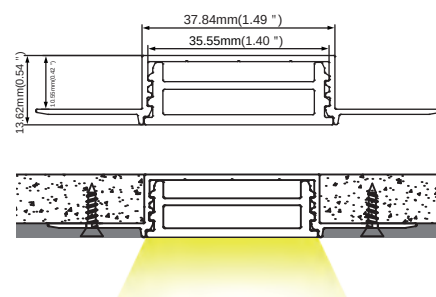

Outside bending



Inside bending

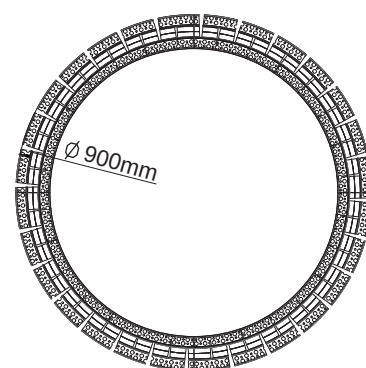

Side bending

ACCESSORIES




Plastic end cap
with hole/without hole




Silicone diffuser



Side bending

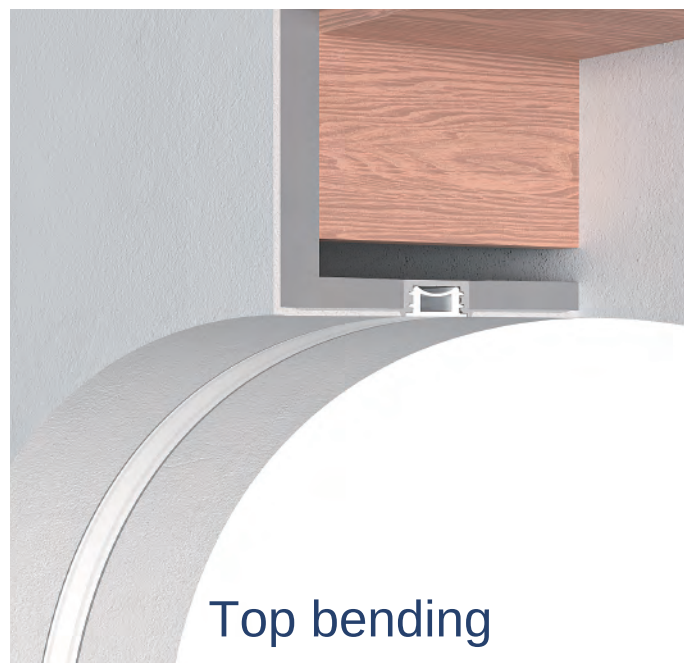


Top bending

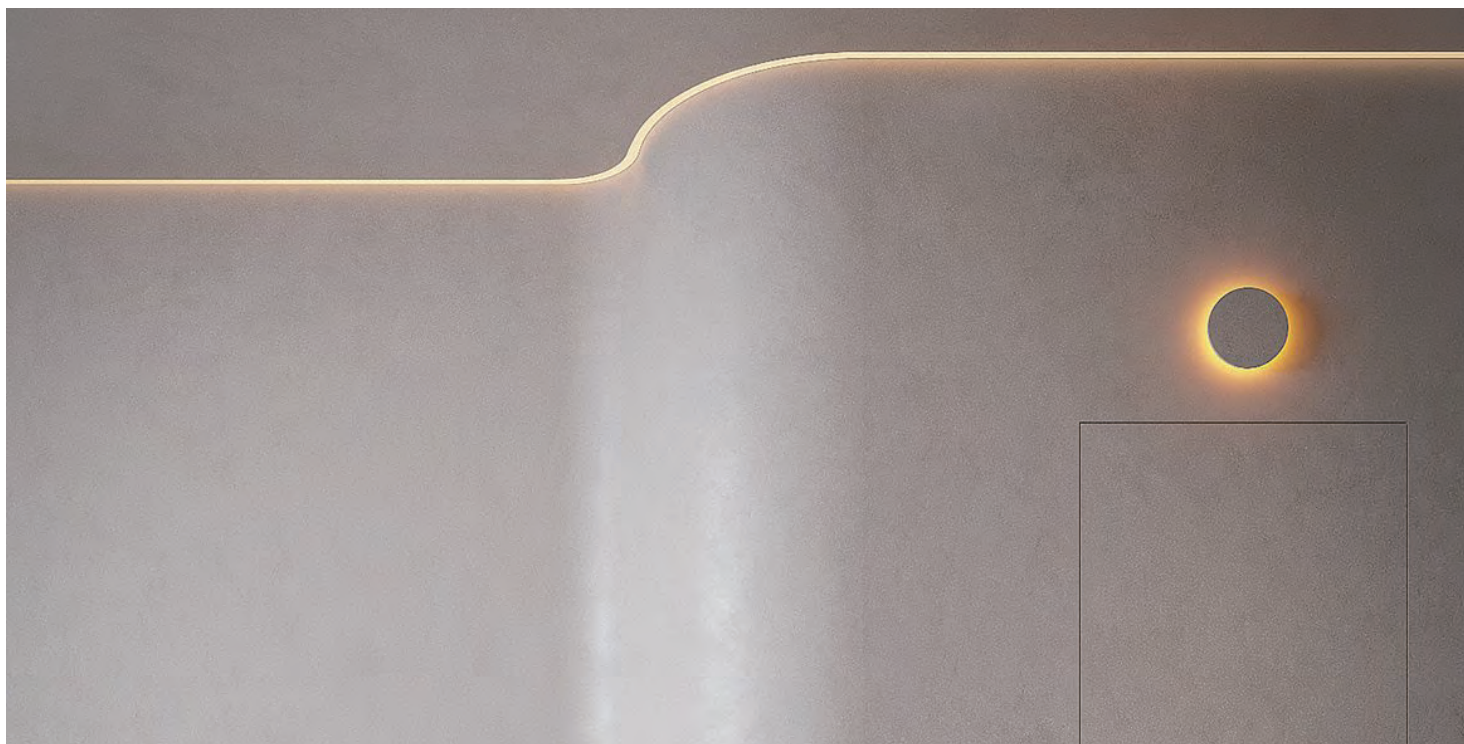



Types of installation:



Material: Extruded aluminum
Dimension: 37.6×15mm
Length: MAX 5m
Compatible with 12.5mm drywall

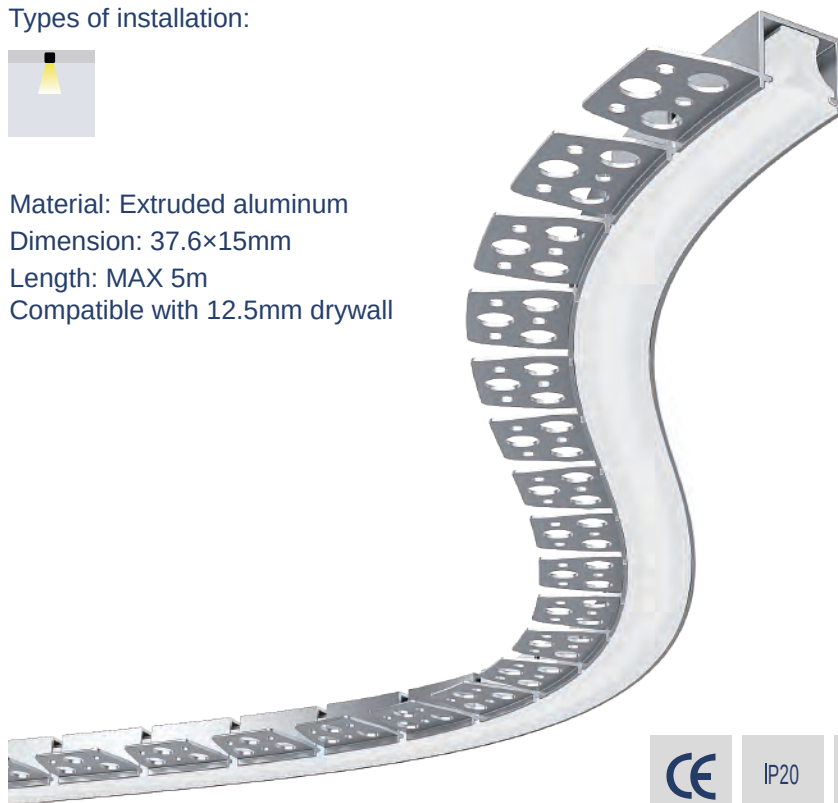

ALP232-C

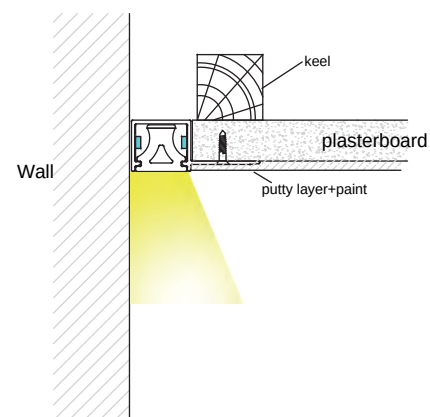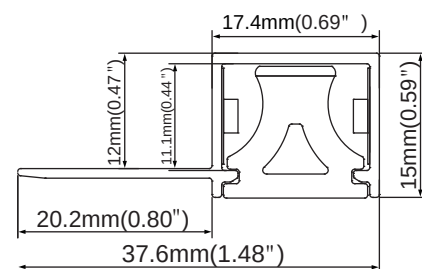

IP20



ACCESSORIES




Plastic end cap
with hole/without hole



Silicone diffuser



ALP233-C

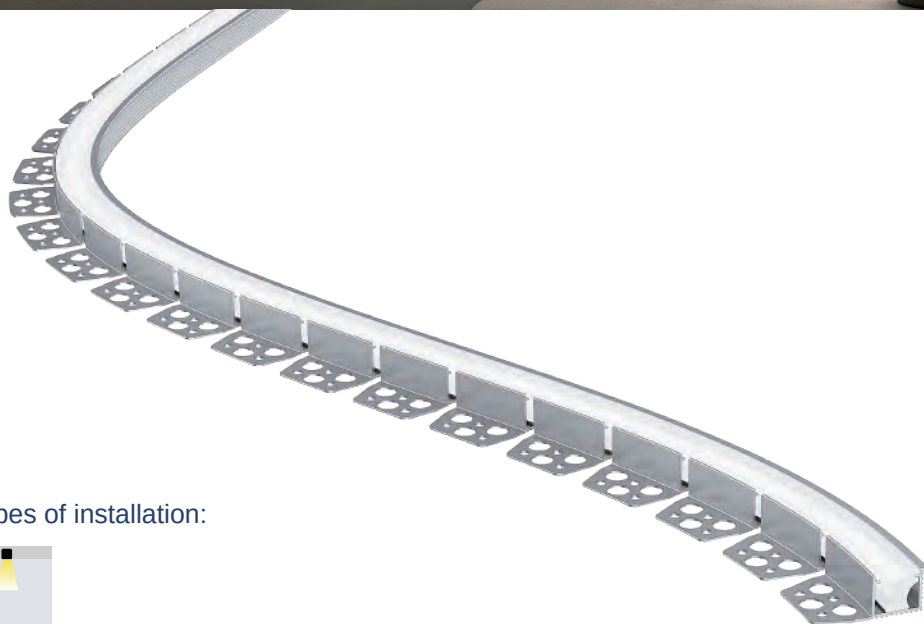



Types of installation:



Material: Extruded aluminum
Dimension: 39.75×15.45mm
Length: MAX 5m
Compatible with 12.5mm drywall



IP20

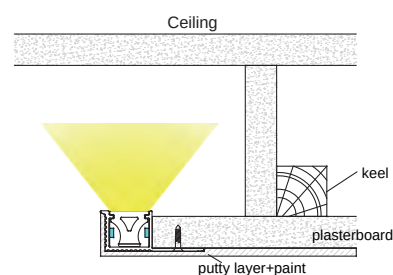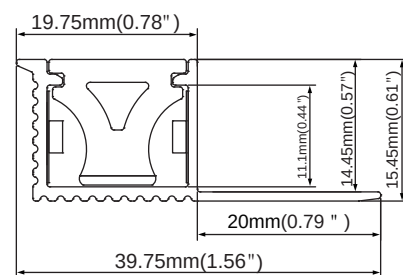


ACCESSORIES



Plastic end cap
with hole/without hole




Silicone diffuser

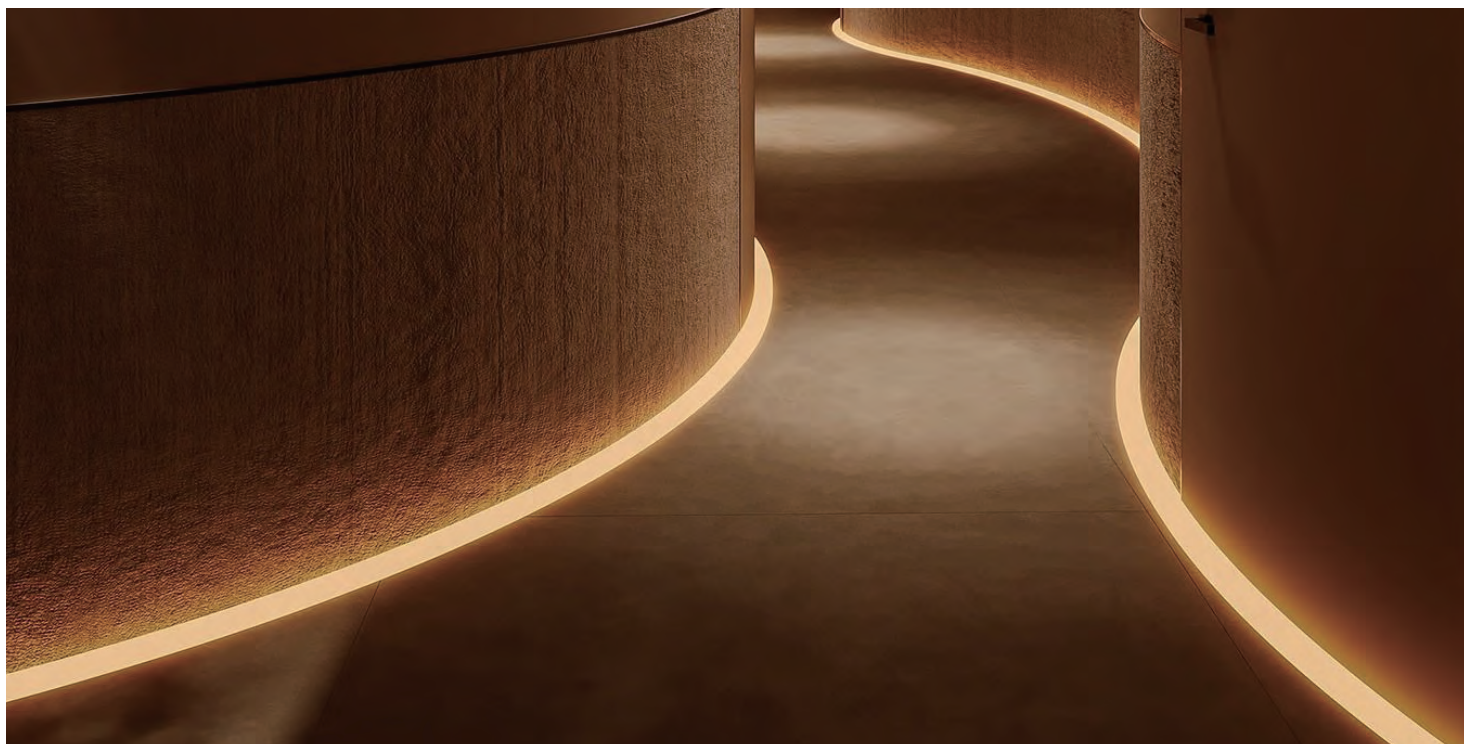


Types of installation:




Material: Extruded aluminum
Dimension: 17.4×15mm
Length: MAX 5m

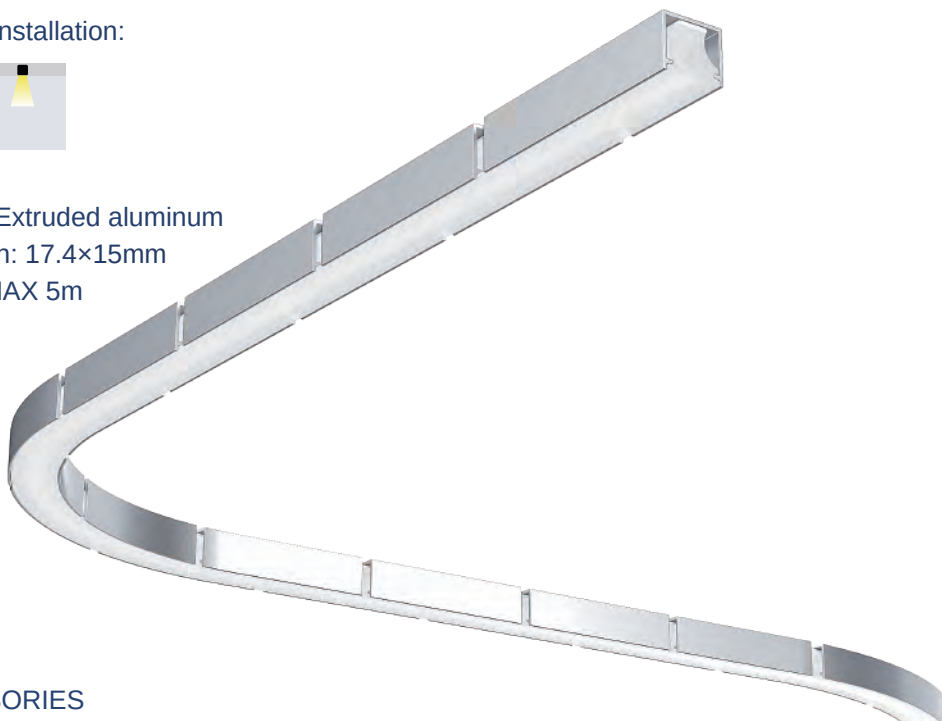

ALP234-C

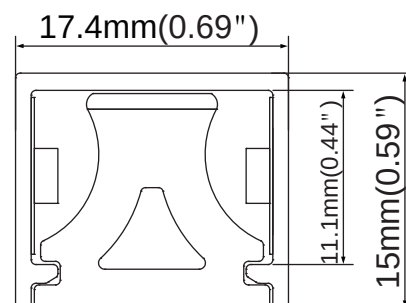

Side bending



Top bending

ACCESSORIES



Plastic end cap
with hole/without hole




Side bending
Silicone diffuser




Top bending
Silicone diffuser



Mounting clip(metal)

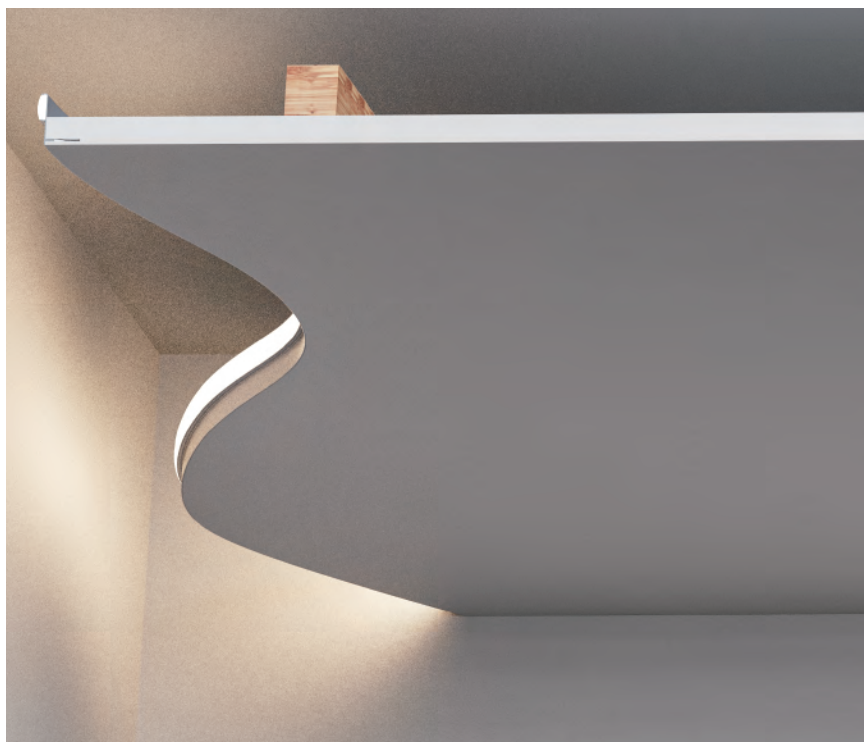

ALP235-C

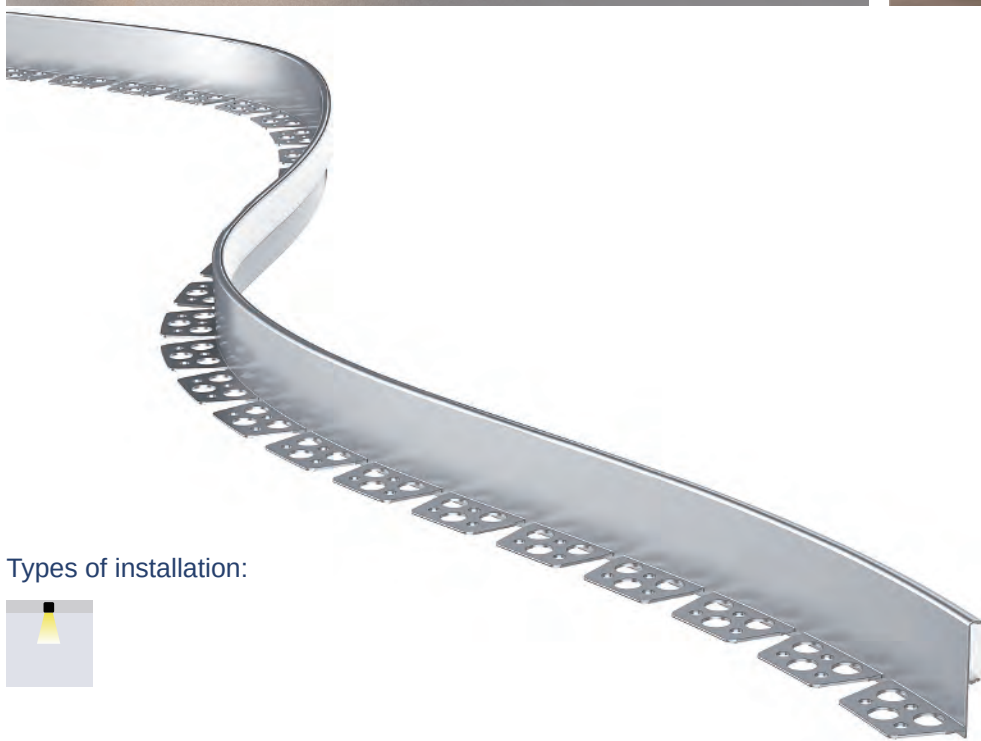



Types of installation:



Material: Extruded aluminum
Dimension: 24.8×30.45mm
Length: MAX 5m
Compatible with 12.5mm drywall



IP20

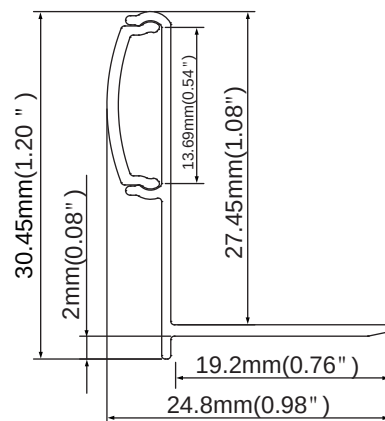

ACCESSORIES



Plastic end cap
with hole/without hole




PC diffused cover



Types of installation:



Material: Extruded aluminum
Dimension: 57.8×15mm
Length: MAX 5m
Compatible with 12.5mm drywall

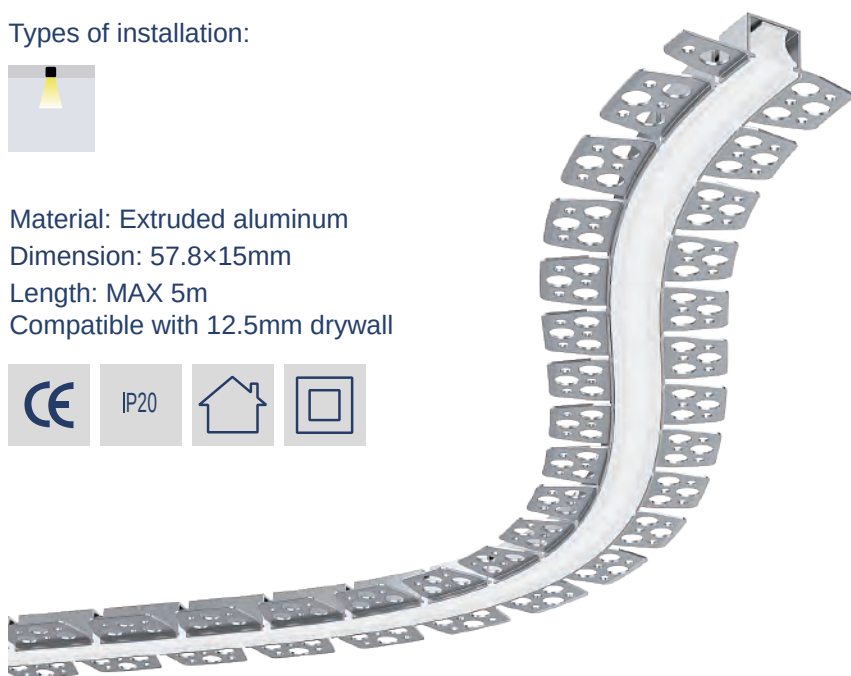

ACCESSORIES



Plastic end cap
with hole/without hole




Side bending
Silicone diffuser




Top bending
Silicone diffuser

ALP237-C

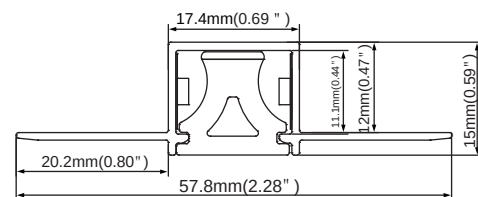

Side bending



Top bending




Types of installation:



Material: Extruded aluminum
Dimension: 67.8×15mm
Length: MAX 5m
Compatible with 12.5mm drywall



ALP238-C

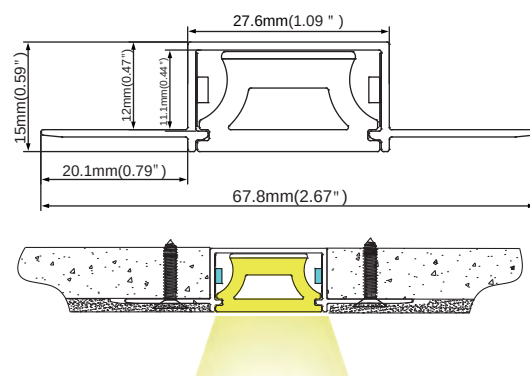

IP20




ACCESSORIES




Plastic end cap
with hole/without hole



Side-bending
Silicone diffuser

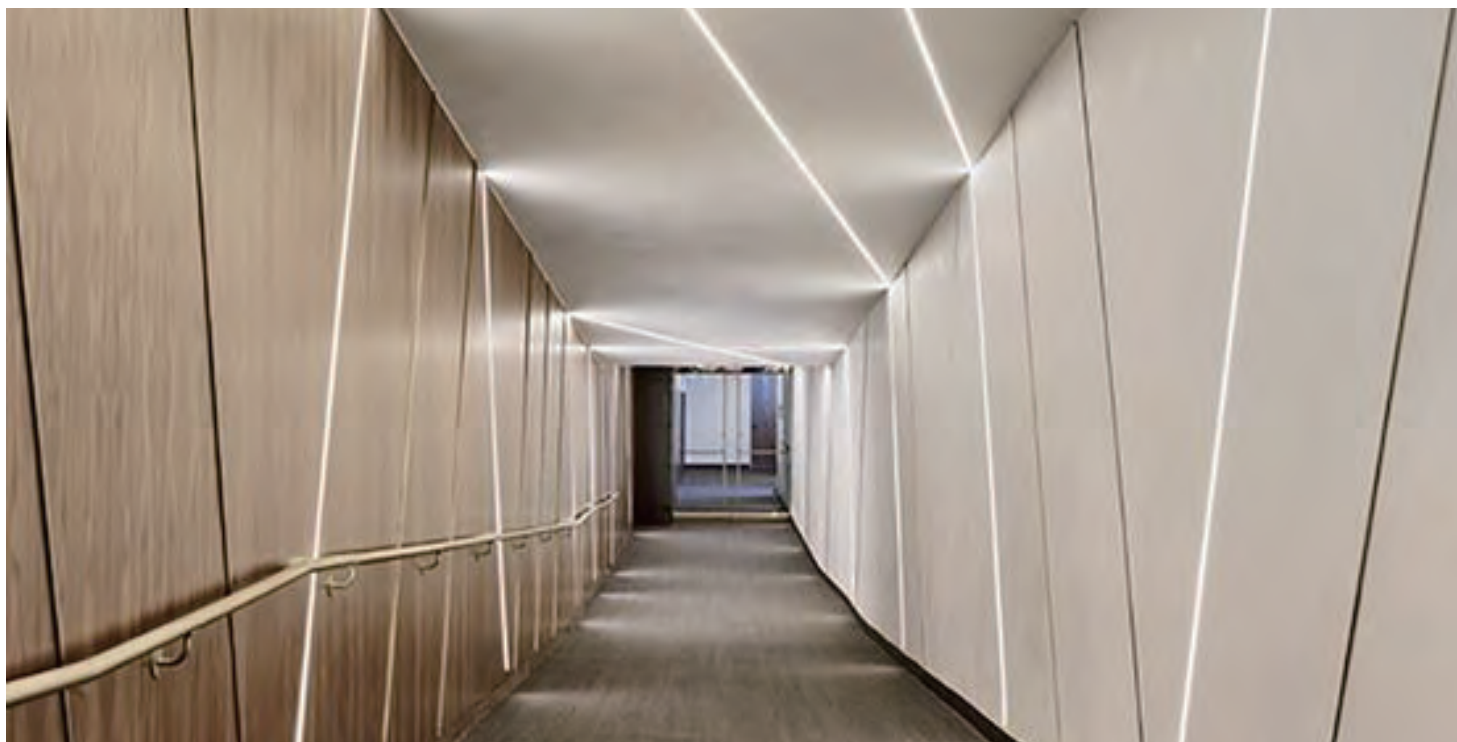

ALP171

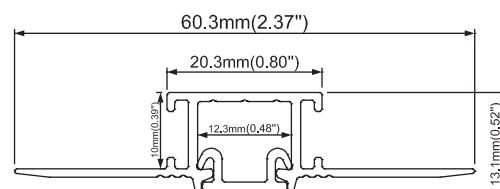

Types of installation:



Material: Extruded aluminum
Dimension: 60.3×13.1mm
Length: MAX 5m
Compatible with 12.5mm drywall

ACCESSORIES



Plastic end cap
with hole/without hole



FINISH




Anod. aluminum white Black




PC diffused cover
Black PC frosted cover



180° Connector
90° Vertical connector
90° Horizontal connector

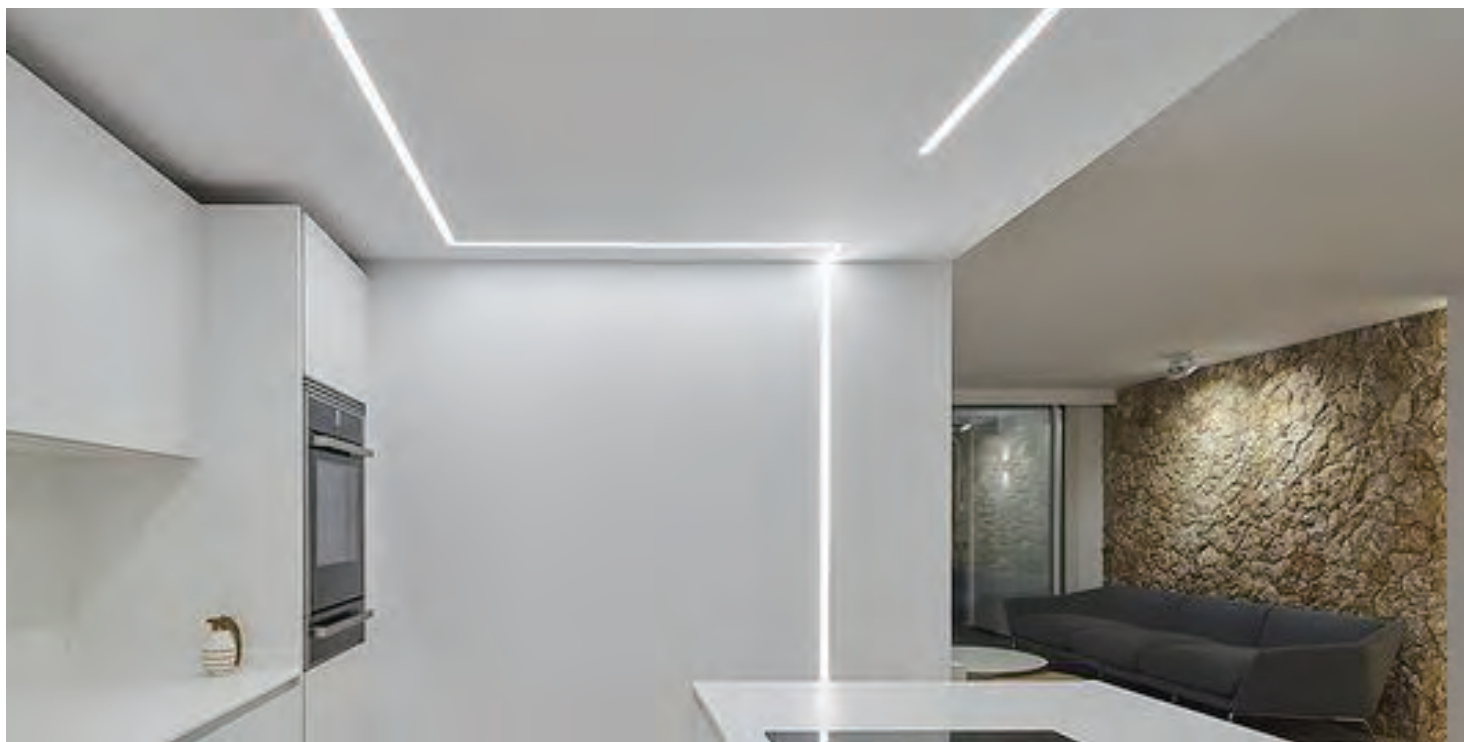

ALP172

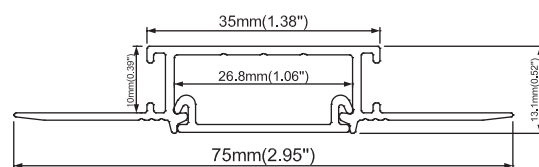

Types of installation:



Material: Extruded aluminum
Dimension: 75×13.1mm
Length: MAX 5m
Compatible with 12.5mm drywall

ACCESSORIES



Plastic end cap
with hole/without hole



IP20



FINISH



Anod. aluminum



white



Black



PC diffused cover
Black PC frosted cover



180° Connector
90° Vertical connector
90° Horizontal connector


Types of installation:



Material: Extruded aluminum
Dimension: 90×18.6mm
Length: MAX 5m
Compatible with 16mm drywall



ALP173

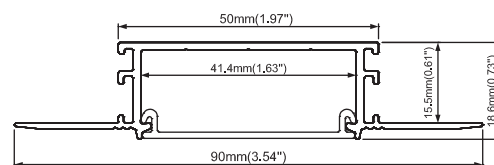

FINISH




Anod. aluminum


white

Black

ACCESSORIES



Plastic end cap
with hole/without hole





PC diffused cover
Black PC frosted cover



180° Connector
90° Vertical connector
90° Horizontal connector



ALP174

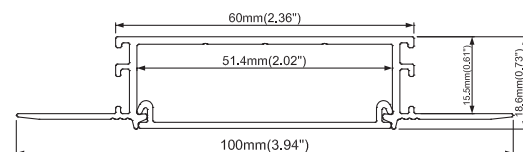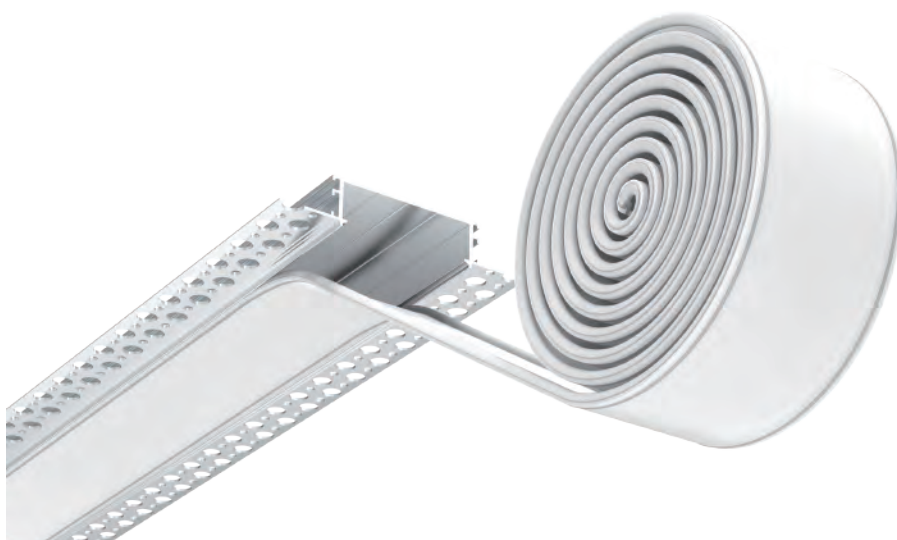


Types of installation:



Material: Extruded aluminum
Dimension: 100×18.6mm
Length: MAX 5m
Compatible with 16mm drywall

ACCESSORIES




Plastic end cap
with hole/without hole



FINISH



Anod. aluminum white Black

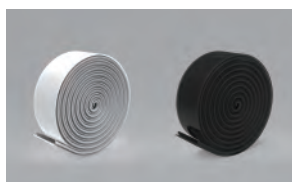

PC diffused cover
Black PC frosted cover



180° Connector
90° Vertical connector
90° Horizontal connector

Types of installation:





Material: Extruded aluminum

Dimension: 33×26.2mm

Length: MAX 5m



ALP175

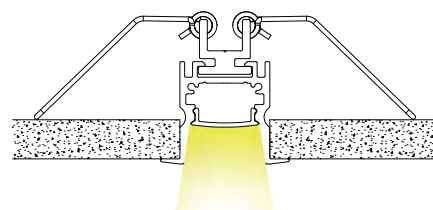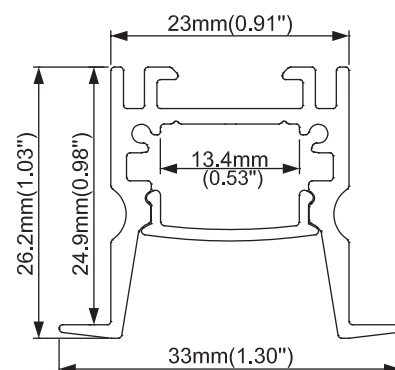

FINISH



Anod. aluminum



white



Black



IP20



ACCESSORIES




Plastic end cap
with hole/without hole



PC diffused cover
PC semi-clear cover
PC clear cover



PC opal prismatic cover
PC clear prismatic cover



Black PC frosted cover



Spring clip



180° Connector
90° Vertical connector
90° Horizontal connector

Types of installation:





Material: Extruded aluminum

Dimension: 23×26.2mm


Length: MAX 5m



ALP176-R

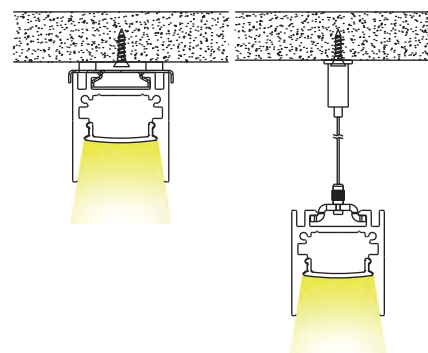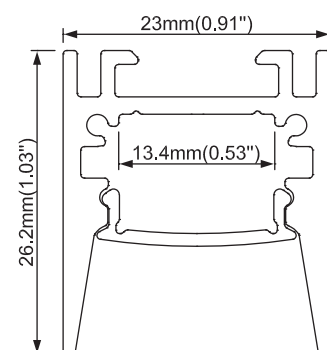

ACCESSORIES



Plastic end cap
with hole/without hole



FINISH




Anod. aluminum

white

Black



PC diffused cover
PC semi-clear cover
PC clear cover



Black PC frosted cover



PC opal prismatic cover
PC clear prismatic cover



Mounting clip(metal)



180° Connector
90° Vertical connector
90° Horizontal connector



Steel wire
Hanging bracket

Types of installation:





Material: Extruded aluminum

Dimension: 63×26.2mm

Length: MAX 5m



ALP177

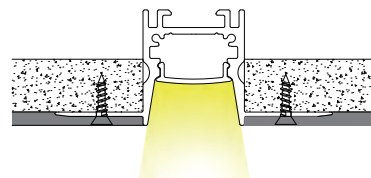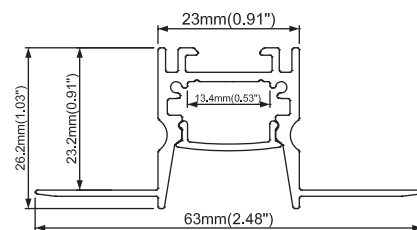

FINISH



Anod. aluminum



white



Black



IP20



ACCESSORIES




Plastic end cap
with hole/without hole



PC diffused cover
PC semi-clear cover
PC clear cover



PC opal prismatic cover
PC clear prismatic cover



Black PC frosted cover



180° Connector
90° Vertical connector
90° Horizontal connector





Types of installation:



Material: Extruded aluminum
Dimension: 47.8×12mm
Length: MAX 5m
Compatible with 12.5mm drywall



ALP129

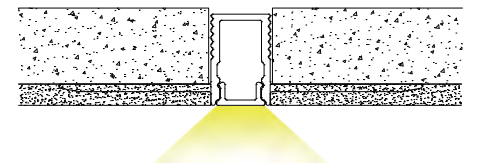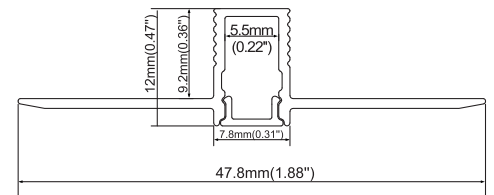

FINISH



Anod. aluminum



white




Black


ACCESSORIES



Plastic end cap
with hole/without hole




PC frosted cover
Black PC frosted cover

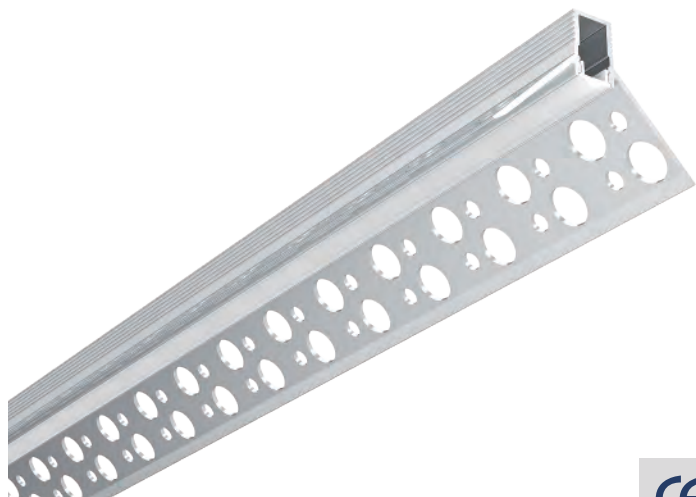

ACCESSORIES



Plastic end cap
with hole/without hole

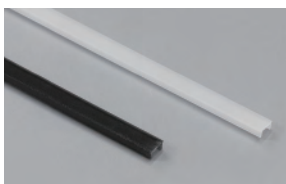


PC frosted cover
Black PC frosted cover

Types of installation:



Material: Extruded aluminum
Dimension: 39.6×24.4mm
Length: MAX 5m
Compatible with 12.5mm drywall

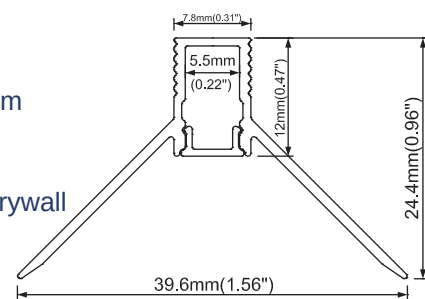

FINISH



Types of installation:




Material: Extruded aluminum
Dimension: 44.1×22.2mm
Length: MAX 5m
Compatible with 12.5mm drywall



ACCESSORIES




Plastic end cap
with hole/without hole



PC frosted cover
Black PC frosted cover

ALP129-O

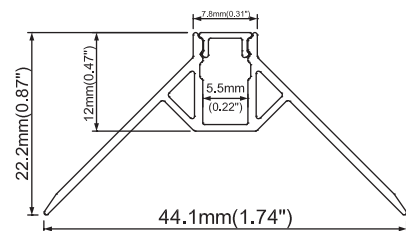

FINISH



Types of installation:





Material: Extruded aluminum

Dimension: 53×14mm

Length: MAX 5m



ALP068-R

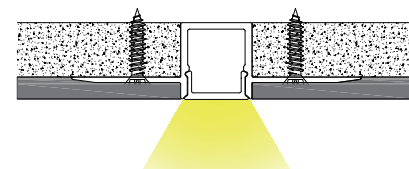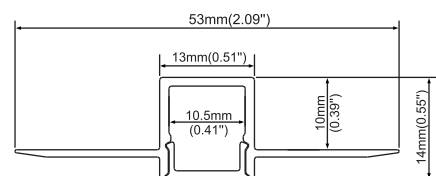

FINISH



Anod. aluminum




white




Black

ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover
Black PC frosted cover
PC opal prismatic cover
PC clear prismatic cover

Types of installation:





Material: Extruded aluminum

Dimension: 46×26mm

Length: MAX 5m



ALP069-R

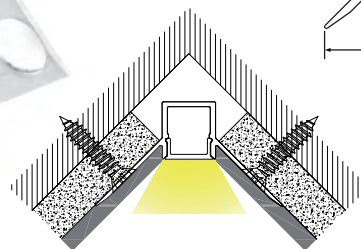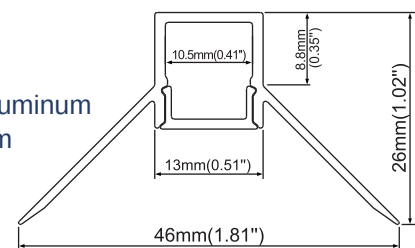

FINISH



Anod. aluminum




white




Black

ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover
Black PC frosted cover
PC opal prismatic cover
PC clear prismatic cover



Types of installation:



Material: Extruded aluminum

Dimension: 50.6×22.8mm

Length: MAX 5m

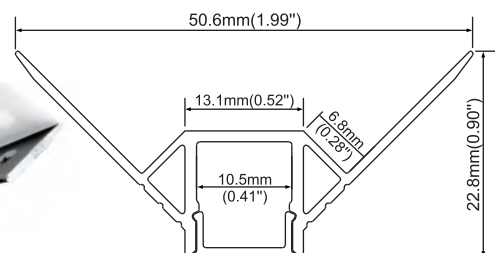

FINISH



Anod. aluminum



white



Black




IP20




ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover
Black PC frosted cover
PC opal prismatic cover
PC clear prismatic cover

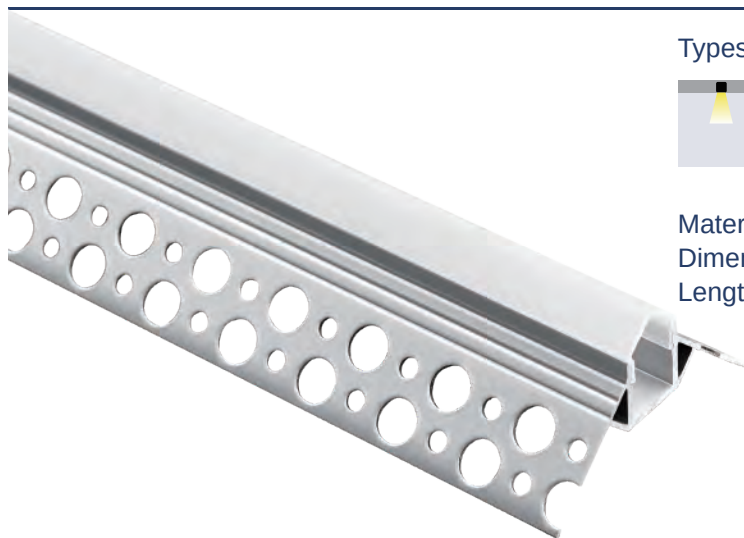

Types of installation:




Material: Extruded aluminum

Dimension: 50.6×30.1mm

Length: MAX 5m

ALP070-V

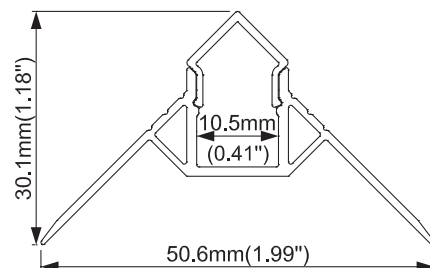

FINISH



Anod. aluminum



white



Black



IP20



ACCESSORIES



Plastic end cap
with hole/without hole





PC diffused cover

Types of installation:



Material: Extruded aluminum
Dimension: 58.7×14mm
Length: MAX 5m
Compatible with 12.5mm drywall

ALP068-R2

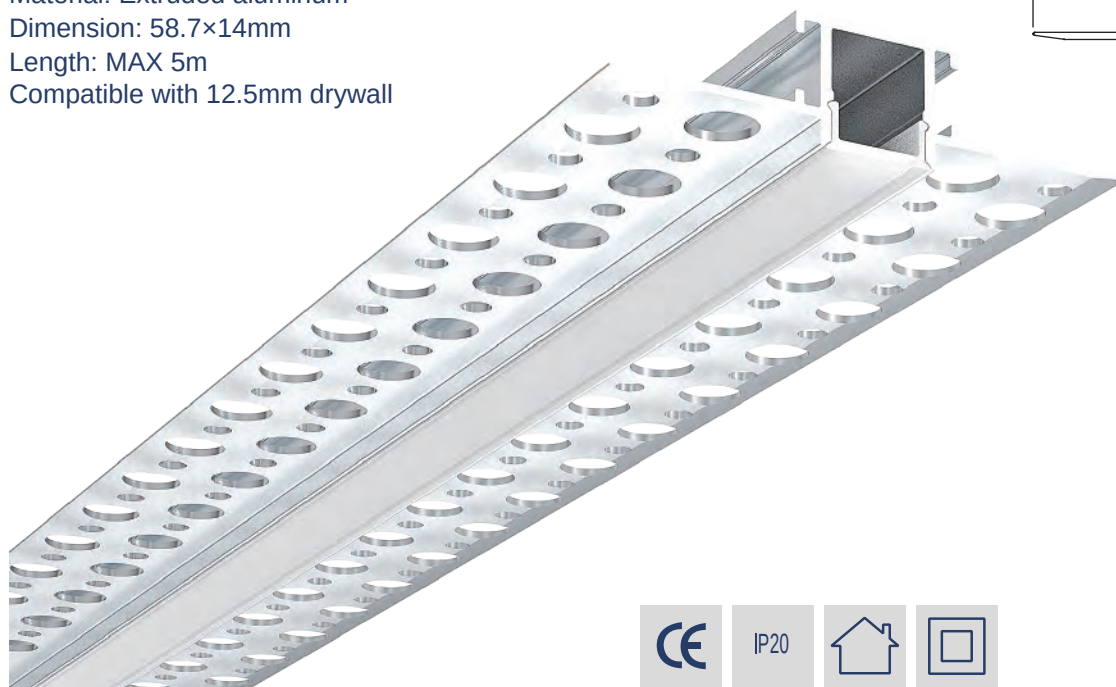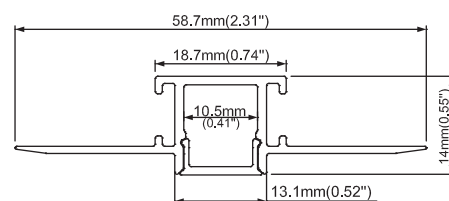


FINISH




ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover
Black PC frosted cover

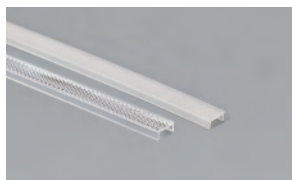

PC opal prismatic cover
PC clear prismatic cover



180° Connector
90° Horizontal connector

Types of installation:



Material: Extruded aluminum
Dimension: 36×14mm
Length: MAX 5m
Compatible with 12.5mm drywall





FINISH




Anod. aluminum white Black


ALP068-S

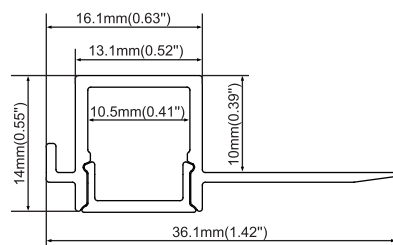


PC diffused cover
Black PC frosted cover
PC opal prismatic cover
PC clear prismatic cover

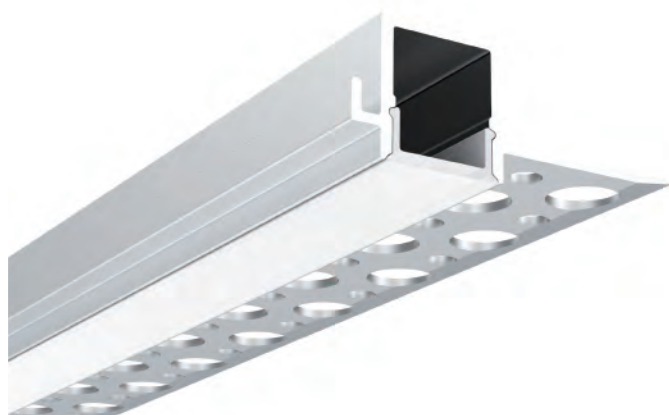

ACCESSORIES



Plastic end cap
with hole/without hole





Types of installation:



Material: Extruded aluminum
Dimension: 35.9×14mm
Length: MAX 5m
Compatible with 12.5mm drywall

ALP068-SR1

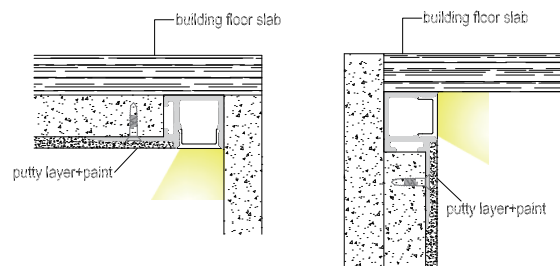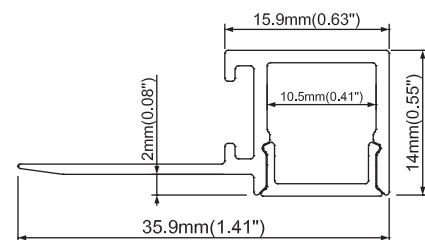

FINISH




Anod. aluminum white Black



ACCESSORIES



Plastic end cap
with hole/without hole




PC diffused cover
Black PC frosted cover
PC opal prismatic cover
PC clear prismatic cover




180° Connector
90° Horizontal connector



ACCESSORIES



Plastic end cap
with hole/without hole

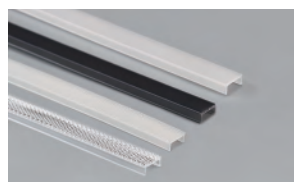

PC diffused cover
Black PC frosted cover
PC opal prismatic cover
PC clear prismatic cover




Mounting clip (metal)

Types of installation:



Material: Extruded aluminum
Dimension: 13.1×13.7mm
Length: MAX 5m

ALP068-R3



FINISH



Anod. aluminum




white




Black




IP20

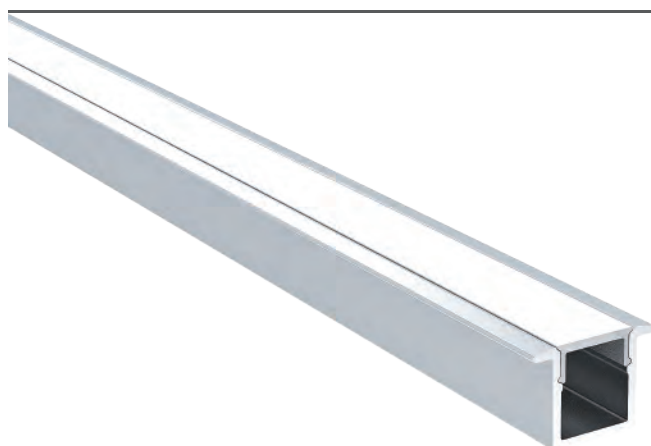

ACCESSORIES



Plastic end cap
with hole/without hole




PC diffused cover
Black PC frosted cover
PC opal prismatic cover
PC clear prismatic cover

Types of installation:



Material: Extruded aluminum
Dimension: 19.1×14mm
Length: MAX 5m

ALP068-R4



FINISH



Anod. aluminum



white



Black



IP20







Types of installation:



Material: Extruded aluminum
Dimension: 61.5×14mm
Length: MAX 5m
Compatible with 12.5mm drywall

ALP071




FINISH




Anod. aluminum white Black


ACCESSORIES



Plastic end cap
with hole/without hole




Black PC frosted cover



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



180° Connector
90° Vertical connector
90° Horizontal connector

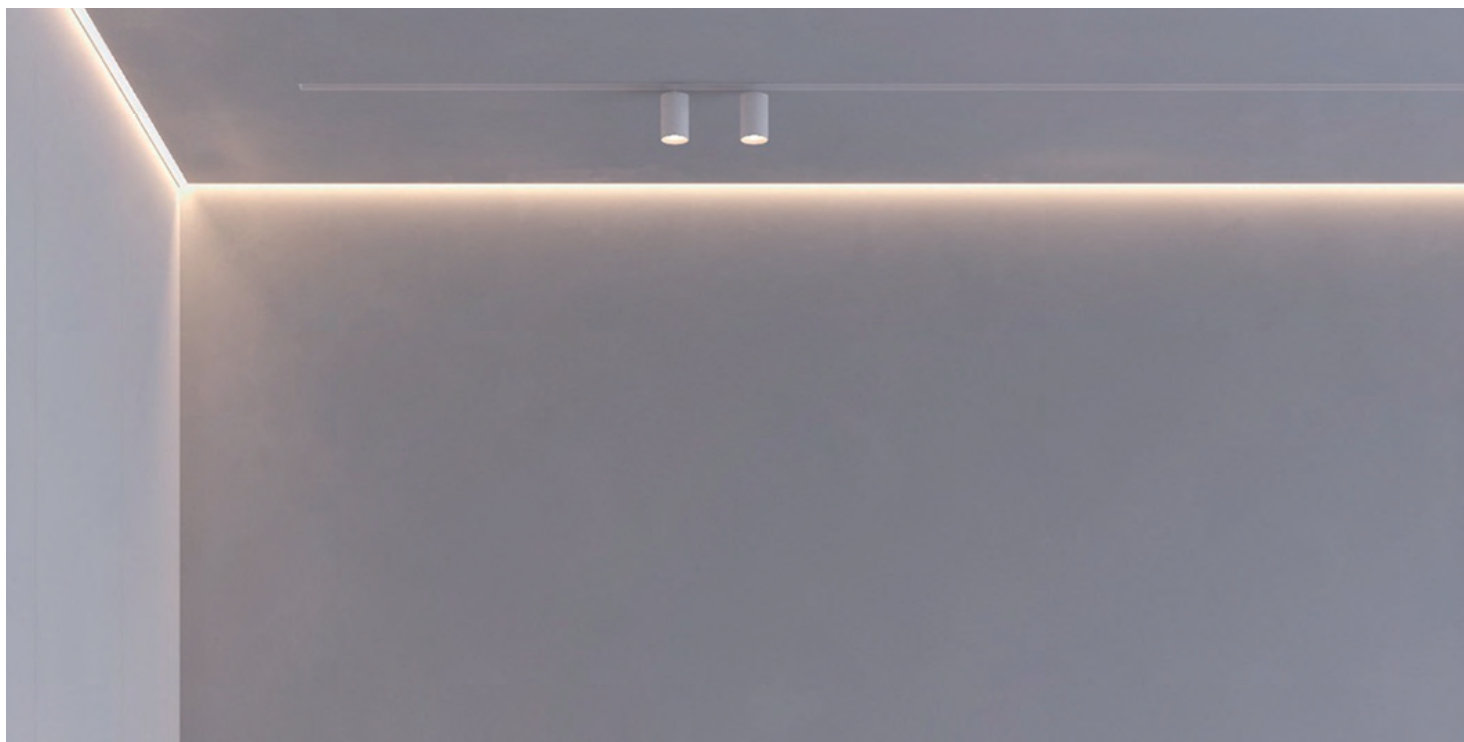

Types of installation:



Material: Extruded aluminum
Dimension: 49×34.9mm
Length: MAX 5m



FINISH



Anod. aluminum





white




Black


ALP071-S

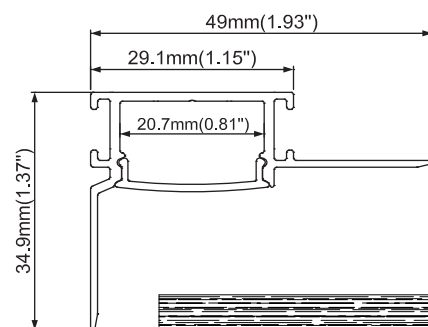


ACCESSORIES



Plastic end cap
with hole/without hole



Black PC frosted cover



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover




180° Connector
90° Vertical connector
90° Horizontal connector


Types of installation:



Material: Extruded aluminum
Dimension: 53×18.5mm
Length: MAX 5m
Compatible with 16mm drywall

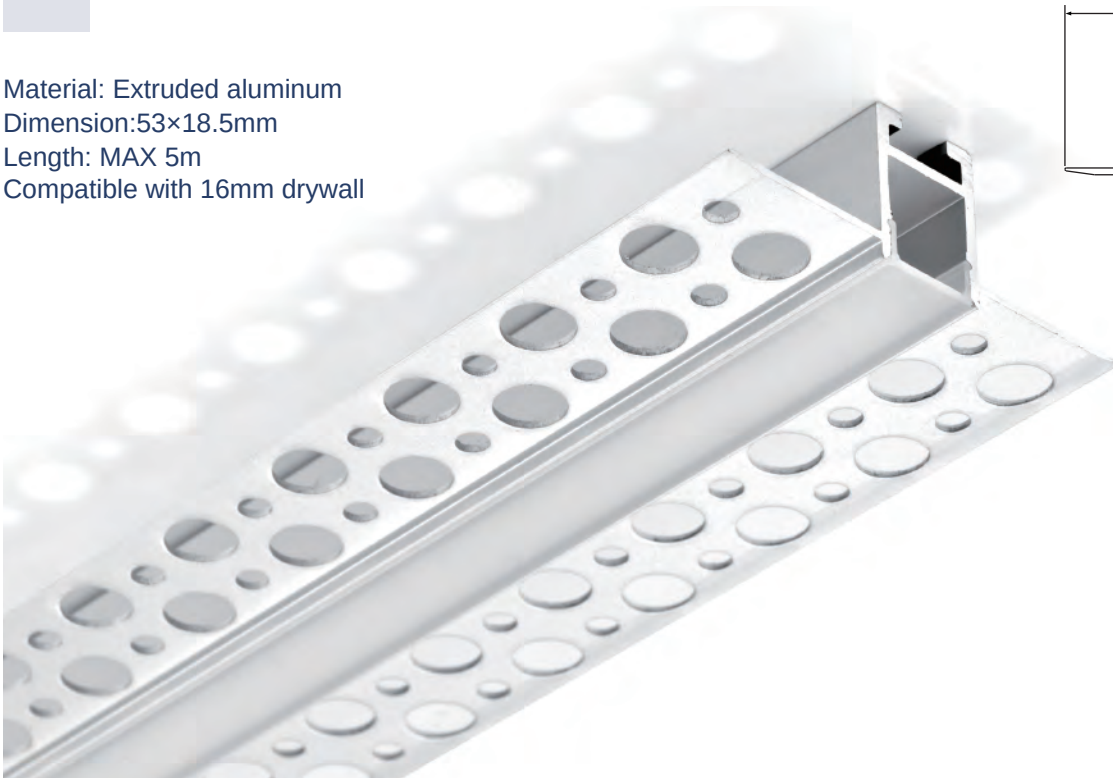

ALP079

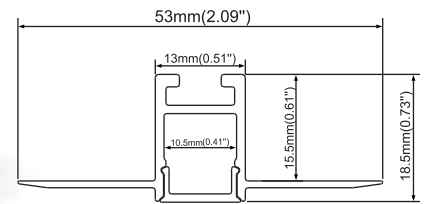


ACCESSORIES




Plastic end cap
with hole/without hole



FINISH





PC diffused cover
Black PC frosted cover




PC Prismatic cover



180° Connector
90° Horizontal connector
90° Vertical connector

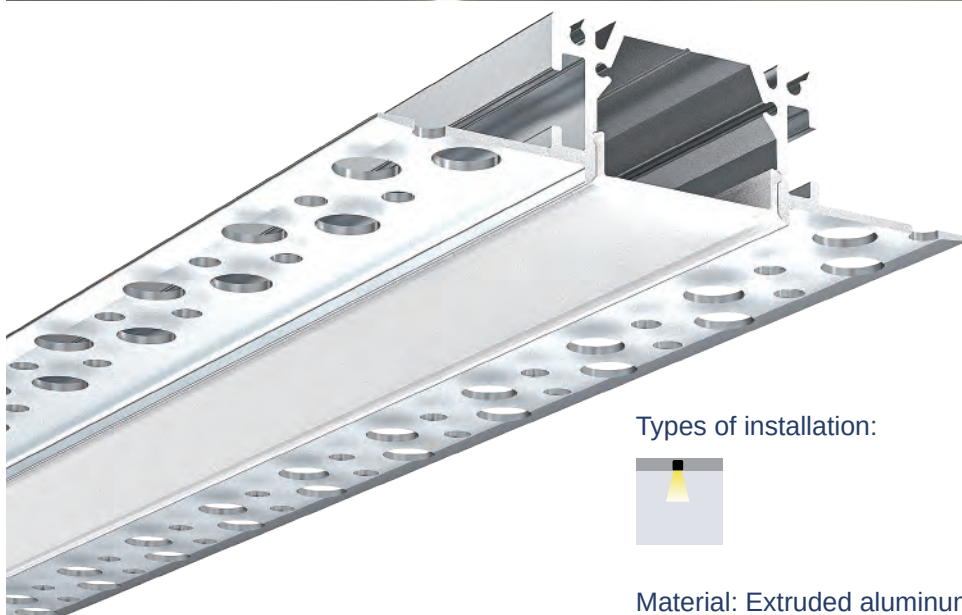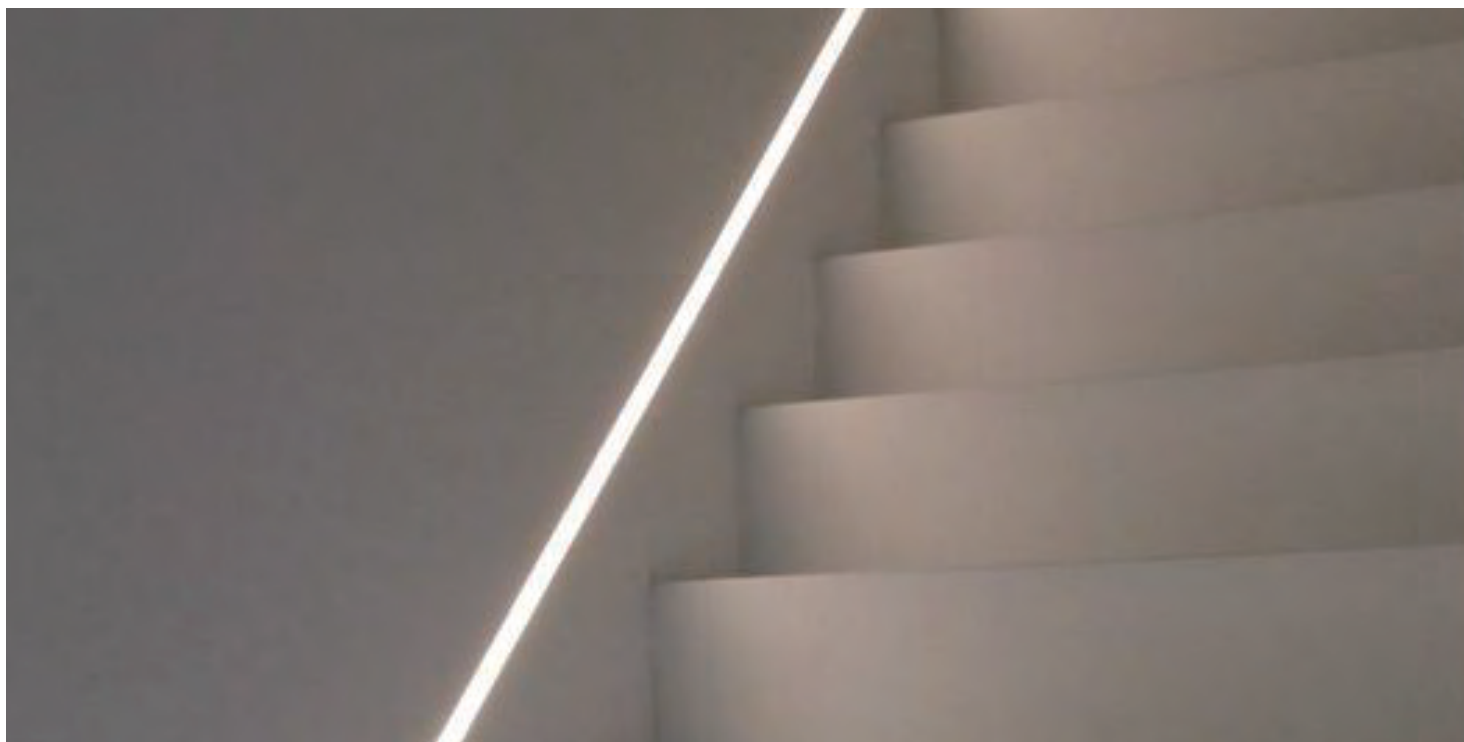

ALP080-R

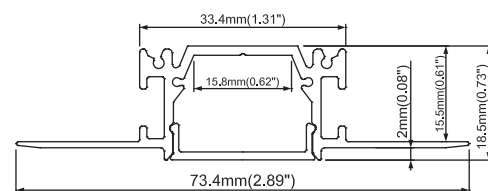

Types of installation:



Material: Extruded aluminum
Dimension: 73.4×18.5mm
Length: MAX 5m
Compatible with 16mm drywall

ACCESSORIES



Aluminum end cap
with hole/without hole



FINISH




Anod. aluminum



white




Black





PC diffused cover
Black PC frosted cover



180° Connector
90° Vertical connector
90° Horizontal connector

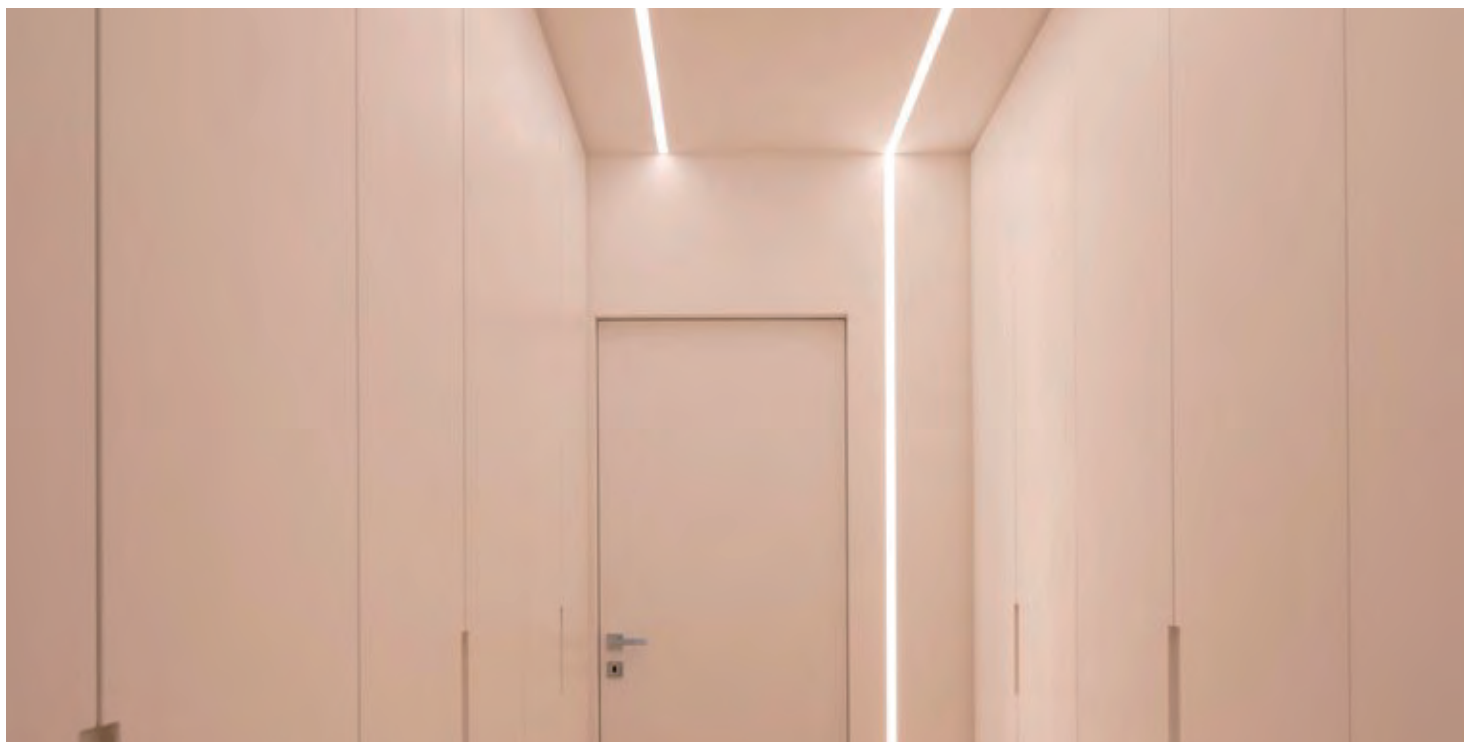

ALP081-R

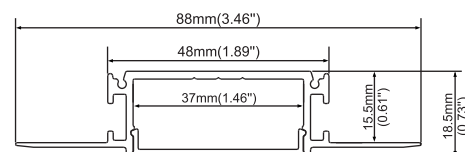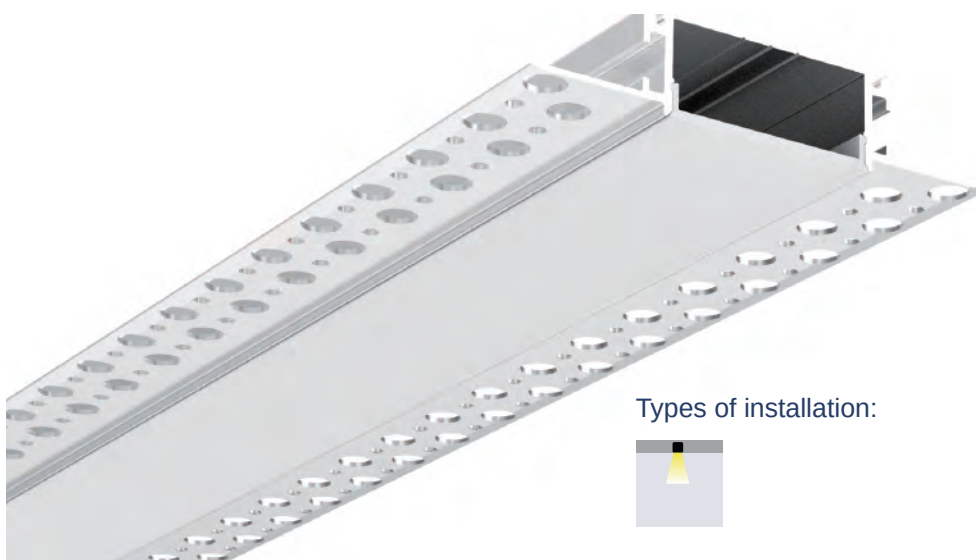

Types of installation:



Material: Extruded aluminum
Dimension: 88×18.5mm
Length: MAX 5m
Compatible with 16mm drywall

ACCESSORIES



Aluminum end cap
with hole/without hole



FINISH




Anod. aluminum



white



Black



PC diffused cover
Black PC frosted cover





180° Connector
90° Vertical connector
90° Horizontal connector

Types of installation:



Material: Extruded aluminum
Dimension: 98×18.5mm
Length: MAX 5m
Compatible with 16mm drywall

ALP083-R

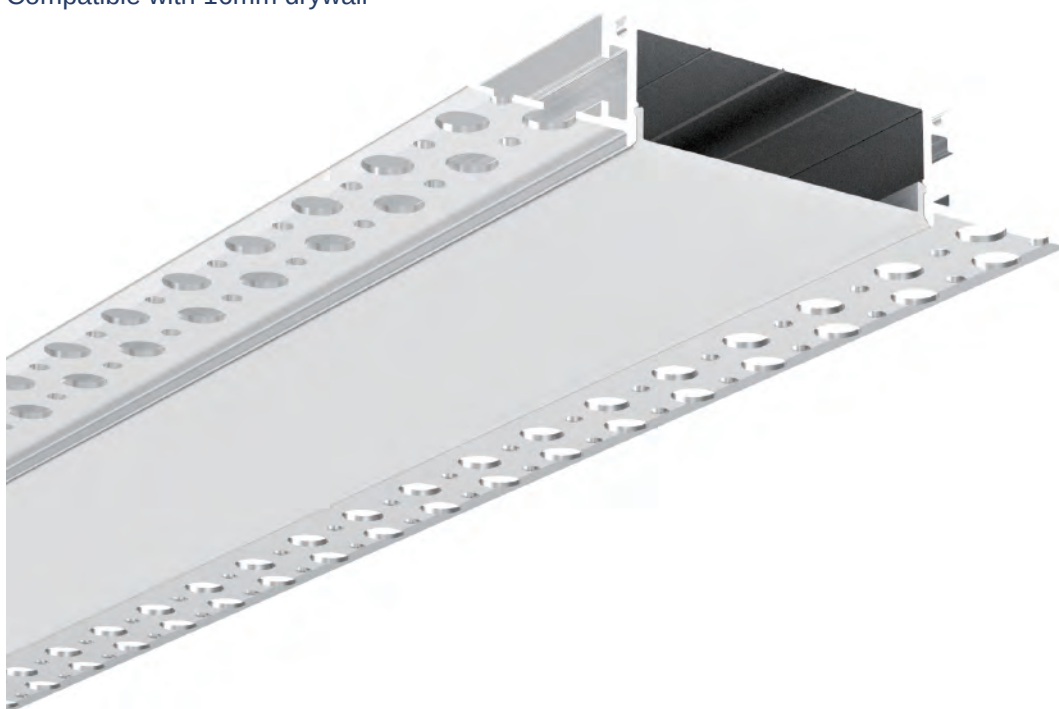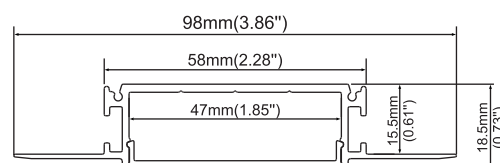

FINISH




Anod. aluminum white Black

ACCESSORIES



Aluminum end cap
with hole/without hole



PC diffused cover



180° Connector
90° Vertical connector
135° Horizontal connector


ALP082



Types of installation:



Material: Extruded aluminum
Dimension: 18.5×96mm
Length: MAX 5m
Compatible with 16mm drywall

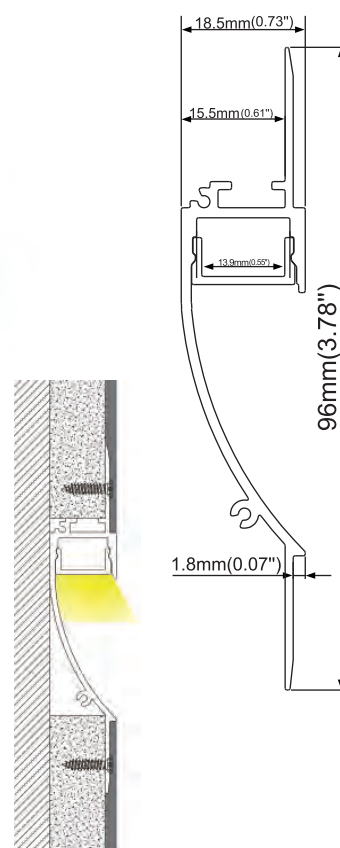

ACCESSORIES



Aluminum end cap
with hole/without hole



PC diffused cover



180° Connector
90° Vertical connector
90° Horizontal connector

FINISH




white





Types of installation:



ALP186

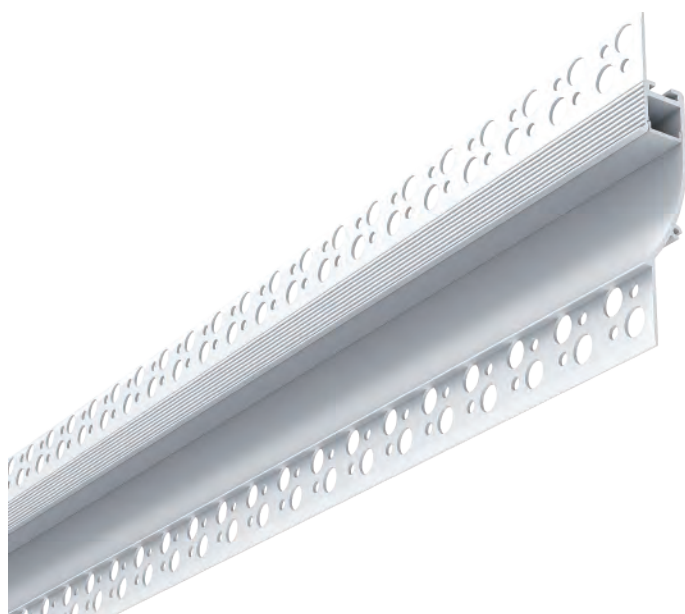


Material: Extruded aluminum
Dimension: 14.8×90.8mm
Length: MAX 5m
Compatible with 12.5mm drywall

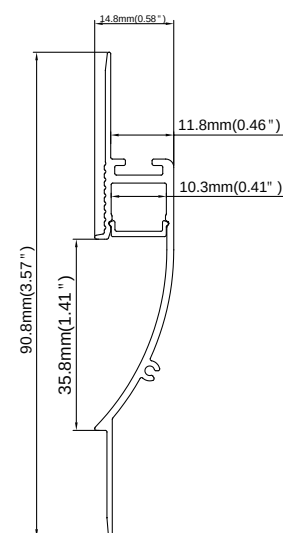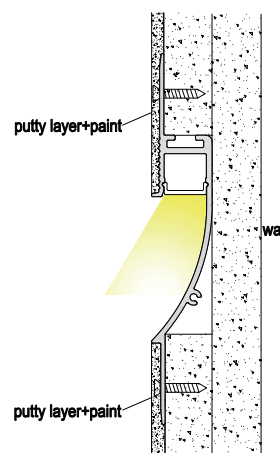

ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover



180° Connector
90° Vertical connector
90° Horizontal connector

FINISH



white



IP20



ALP085



Types of installation:



Material: Extruded aluminum
Dimension: 18.5×119mm
Length: MAX 5m
Compatible with 16mm drywall



ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover



180° Connector
90° Vertical connector
135° Horizontal connector

FINISH



IP20



white



ALP086



Types of installation:



Material: Extruded aluminum
Dimension: 18.5×133.8mm
Length: MAX 5m
Compatible with 16mm drywall

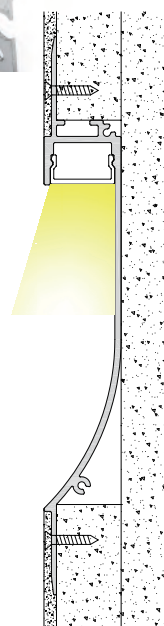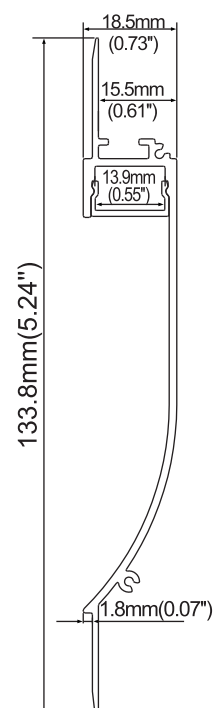

ACCESSORIES



Aluminum end cap
with hole/without hole



PC diffused cover



180° Connector
90° Vertical connector
135° Horizontal connector

FINISH



white



Types of installation:



Material: Extruded aluminum
Dimension: 33.1×11mm
Length: MAX 5m
Compatible with 10mm tile



ACCESSORIES





Plastic end cap
with hole/without hole



PC diffused cover

ALP087

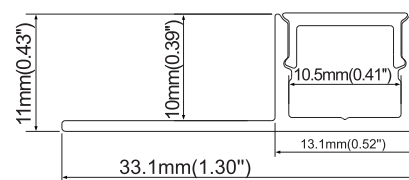

FINISH



Types of installation:



Material: Extruded aluminum
Dimension: 56.3×22.4mm
Length: MAX 5m
Compatible with 10mm tile



ACCESSORIES





Plastic end cap
with hole/without hole



PC diffused cover

ALP088

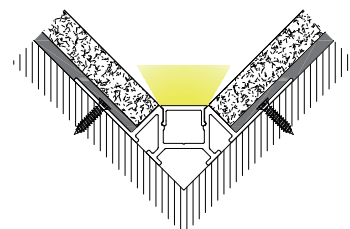
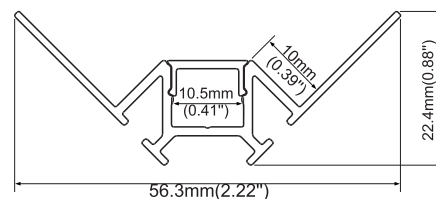


FINISH





ALP089

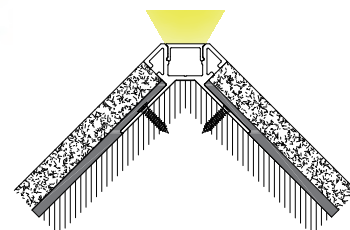

Types of installation:



Material: Extruded aluminum

Dimension: 39.4×27.1mm

Length: MAX 5m

Compatible with 10mm tile



FINISH



Anod. aluminum



white



Black

ACCESSORIES



Plastic end cap
with hole/without hole




PC diffused cover



ACCESSORIES



Aluminum end cap
without hole




PC diffused cover

Types of installation:



Material: Extruded aluminum
Dimension: 79×32mm
Length: MAX 5m
Compatible with 12.5mm drywall

ALP092

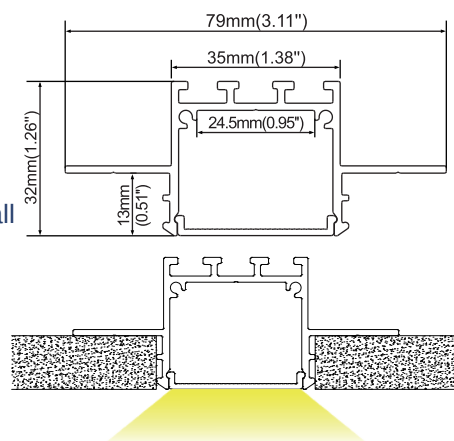

FINISH



Anod. aluminum



white



Black




180° Connector
90° Vertical connector
90° Horizontal connector



ACCESSORIES



Aluminum end cap
without hole




PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover

Types of installation:



Material: Extruded aluminum
Dimension: 88.1×32mm
Length: MAX 5m
Compatible with 12.5mm drywall

ALP093

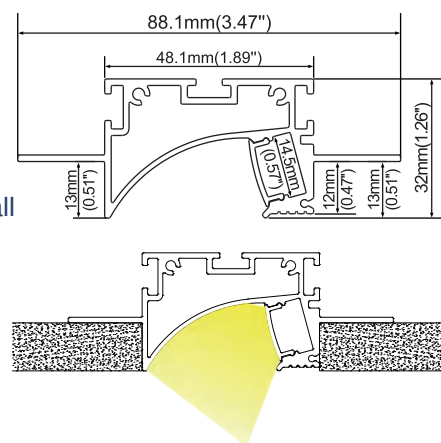

FINISH



Anod. aluminum



white



Black




180° Connector
90° Vertical connector
90° Horizontal connector

Types of installation:



Material: Extruded aluminum
Dimension: 98×35mm
Length: MAX 5m
Compatible with 12.5mm drywall

ALP094

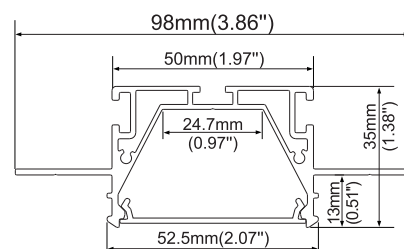

ACCESSORIES



Aluminum end cap
without hole



PC diffused cover



180° Connector
90° Vertical connector
90° Horizontal connector

FINISH




Anod. aluminum white Black

Types of installation:



Material: Extruded aluminum
Dimension: 125×39mm
Length: MAX 5m
Compatible with 12.5mm drywall


ALP095

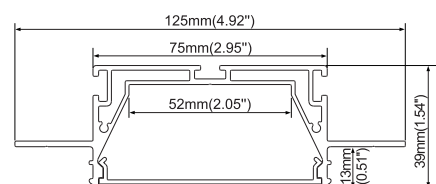

ACCESSORIES



Aluminum end cap
without hole



PC diffused cover




180° Connector
90° Vertical connector
90° Horizontal connector

FINISH



Anod. aluminum white Black

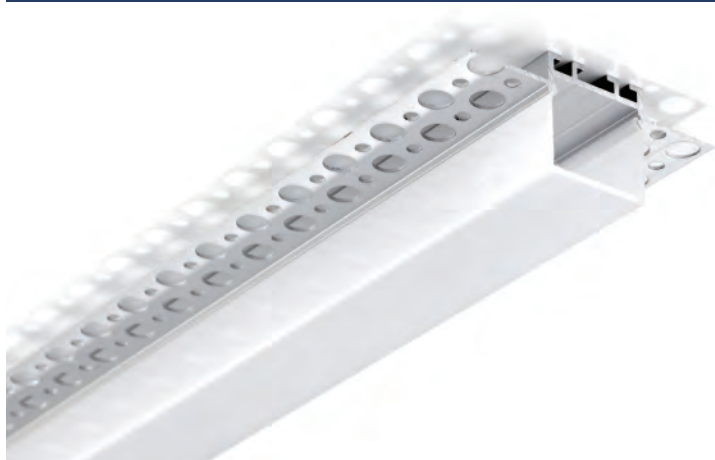


Types of installation:




Material: Extruded aluminum
Dimension: 65.4×28mm
Length: MAX 5m
Compatible with 12.5mm drywall

ALP110-S

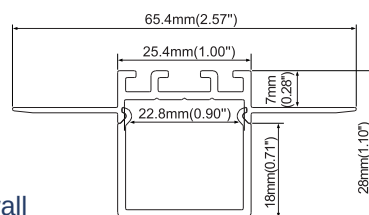

ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover



FINISH



Anod. aluminum white Black



180° Connector
90° Vertical connector
90° Horizontal connector




Types of installation:



Material: Extruded aluminum
Dimension: 65.4×28mm
Length: MAX 5m
Compatible with 12.5mm drywall

ALP110-R

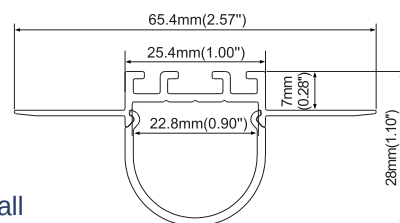

FINISH



Anod. aluminum white Black

ACCESSORIES




Plastic end cap
with hole/without hole



PC diffused cover



ACCESSORIES



Plastic end cap
with hole/without hole



Mounting clip (metal)



ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover

Types of installation:



Material: Extruded aluminum
Dimension: 25.4×28mm
Length: MAX 5m



FINISH




Anod. aluminum



white



Black



PC diffused cover



180° Connector
90° Vertical connector
90° Horizontal connector

Types of installation:



Material: Extruded aluminum
Dimension: 25.4×28mm
Length: MAX 5m



FINISH




Anod. aluminum



white



Black



Mounting clip (metal)



Types of installation:



Material: Extruded aluminum
Dimension: 143×46mm
Length: MAX 5m
Compatible with 16mm drywall




ALP090

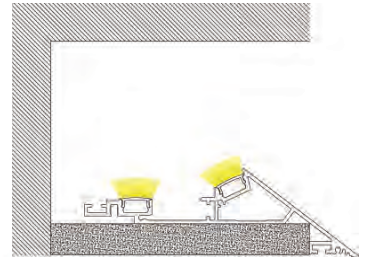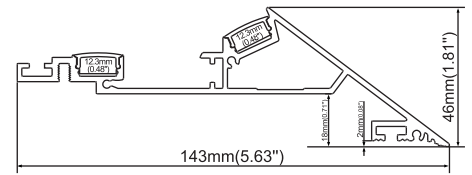

ACCESSORIES



Aluminum end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



180° Connector
90° Vertical connector
90° Horizontal connector



IP20



FINISH



Anod. aluminum




white



Black

ALP091

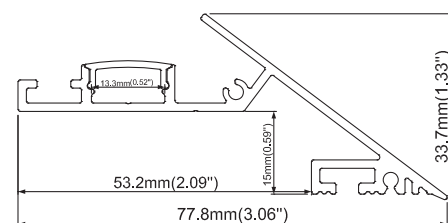

Types of installation:



Material: Extruded aluminum
Dimension: 77.8×33.7mm
Length: MAX 5m
Compatible with 16mm drywall

FINISH



IP20




white

ACCESSORIES



Aluminum end cap
with hole/without hole




PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover




180° Connector
90° Vertical connector
90° Horizontal connector



ALP091-E

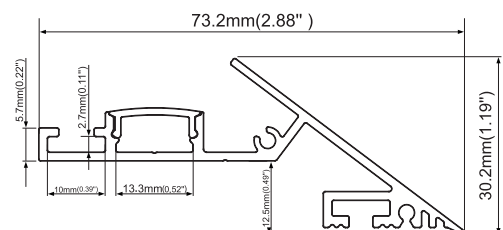

Types of installation:



Material: Extruded aluminum
Dimension: 73.2×30.2mm
Length: MAX 5m
Compatible with 12.5mm drywall

ACCESSORIES




Aluminum end cap
with hole/without hole



FINISH




Anod. aluminum white Black



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



180° Connector
90° Vertical connector
90° Horizontal connector


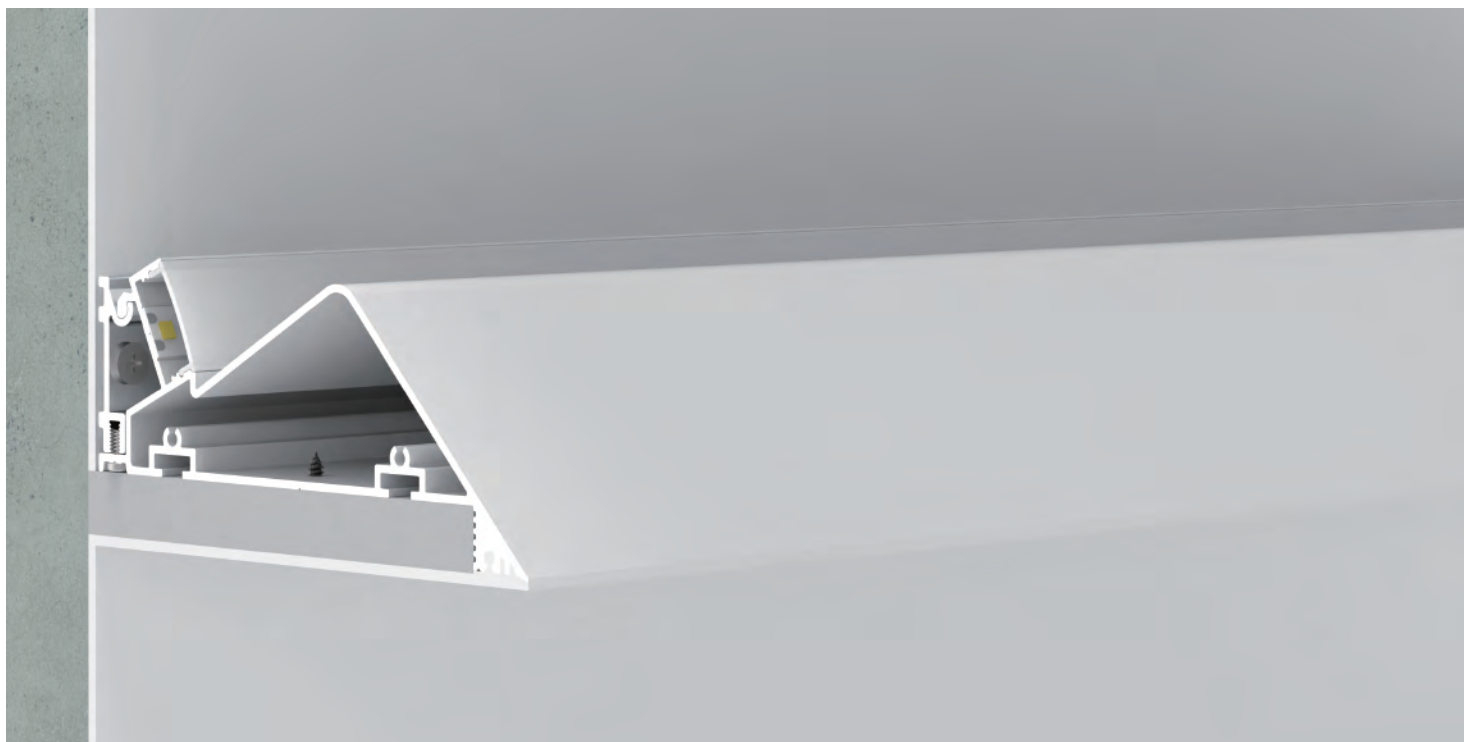


Types of installation:



Material: Extruded aluminum
Dimension: 114.2×50.1mm
Length: MAX 5m
Compatible with 12.5mm drywall

ALP193

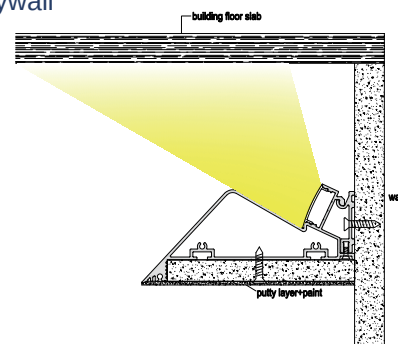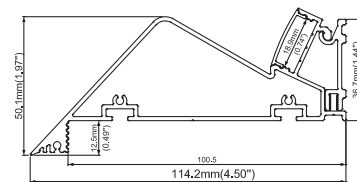

ACCESSORIES



Aluminum end cap
without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



180° Connector
90° Vertical connector
90° Horizontal connector


FINISH



IP20



white

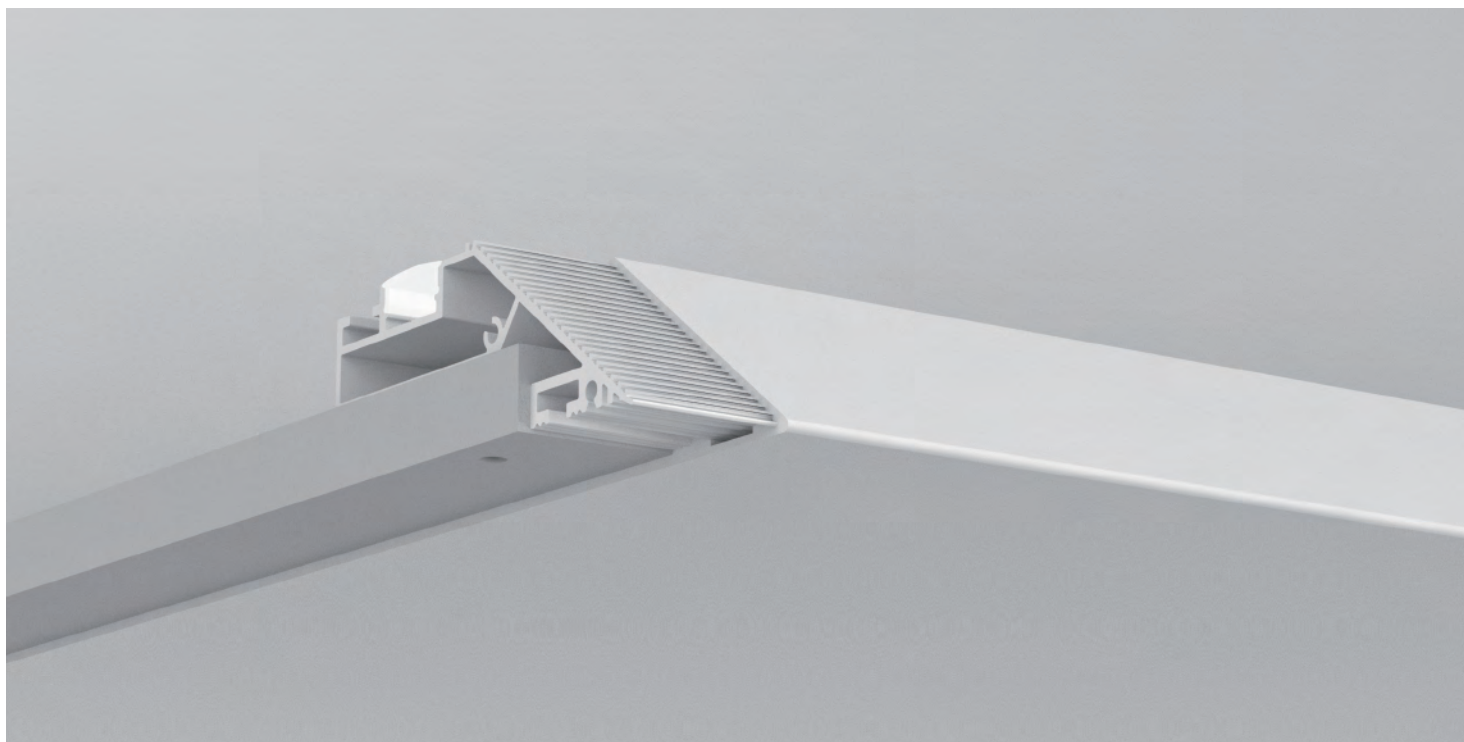

Types of installation:




Material: Extruded aluminum
Dimension: 64×136mm
Length: MAX 5m
Compatible with 12.5mm drywall

ACCESSORIES



Aluminum end cap
with hole/without hole





PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



180° Connector
90° Vertical connector
90° Horizontal connector

ALP198

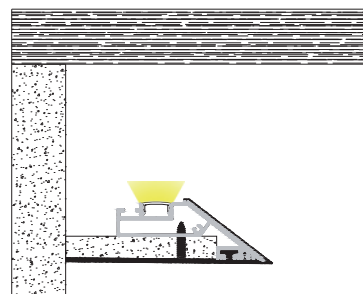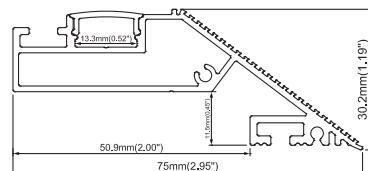


FINISH






ALP199

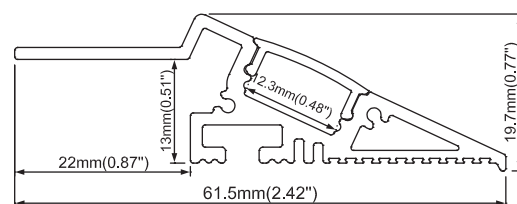

Types of installation:



Material: Extruded aluminum
Dimension: 61.5×19.7mm
Length: MAX 5m




ACCESSORIES



Plastic end cap
with hole/without hole




FINISH



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



180° Connector
90° Vertical connector
90° Horizontal connector

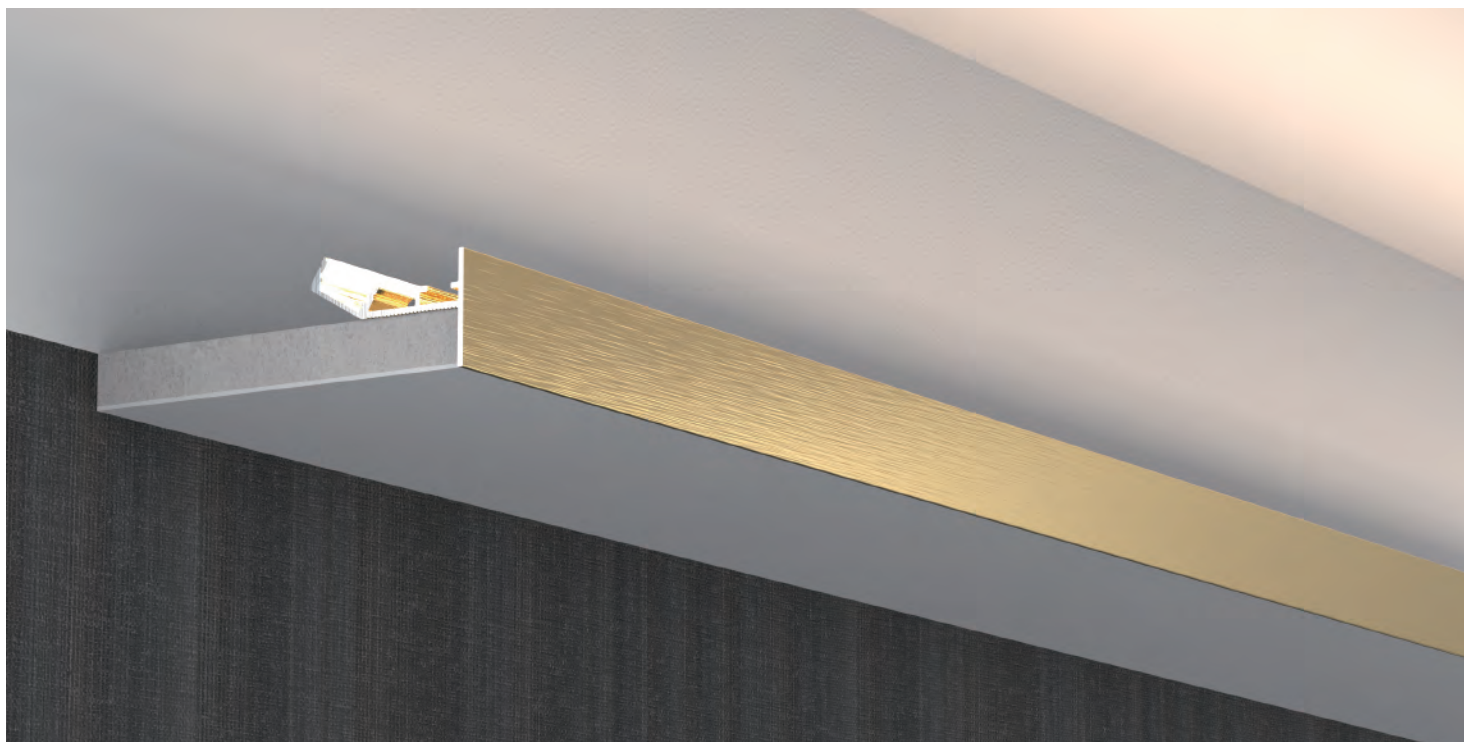

ALP205




Types of installation:




Material: Extruded aluminum

Dimension: 40.2×26mm


Length: MAX 5m

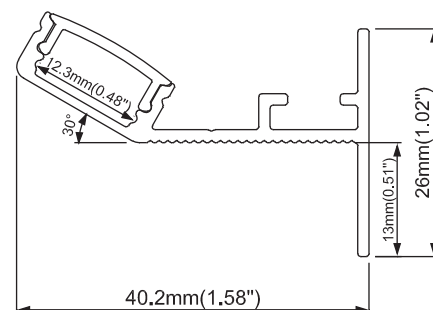

ACCESSORIES



Plastic end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover

FINISH



Anod. aluminum



white




Black




Golden



180° Connector
90° Vertical connector
90° Horizontal connector

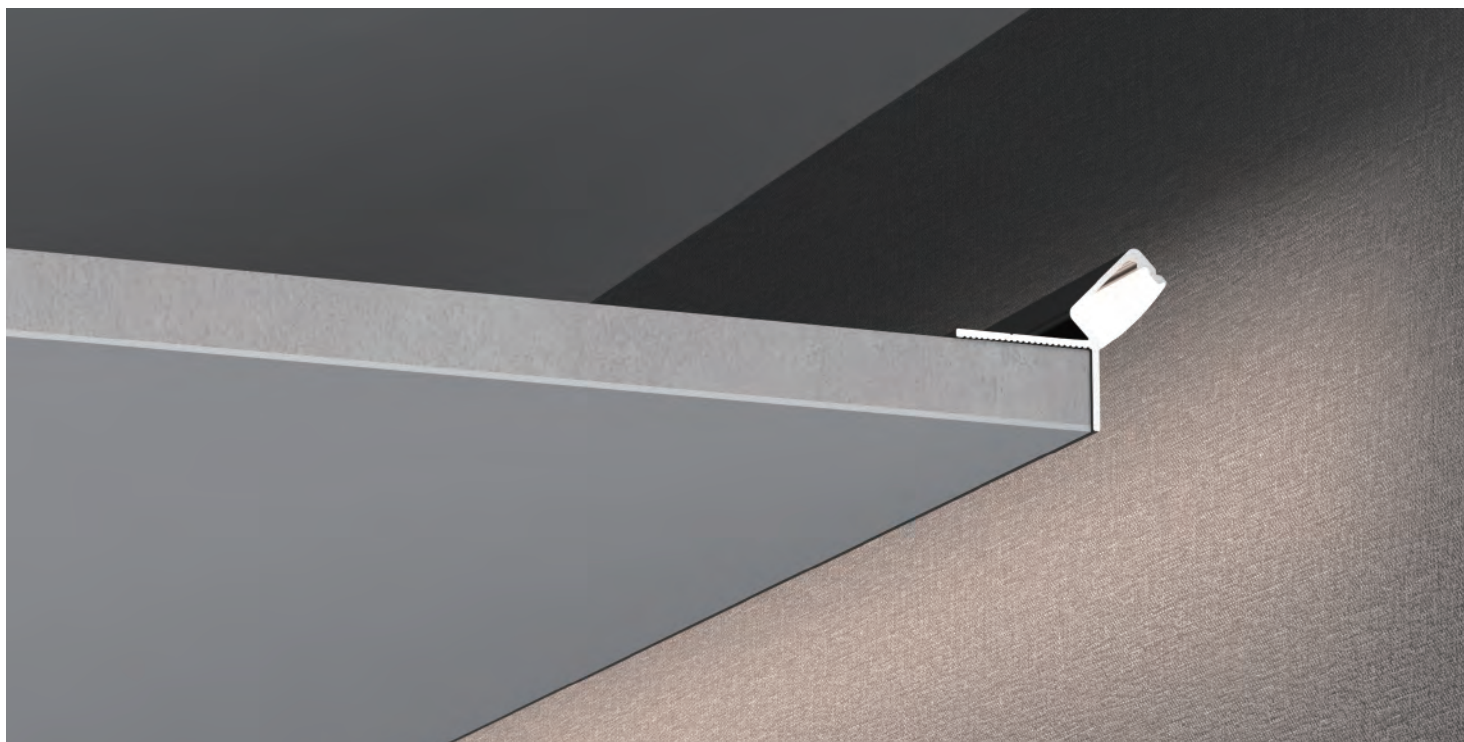

ALP206

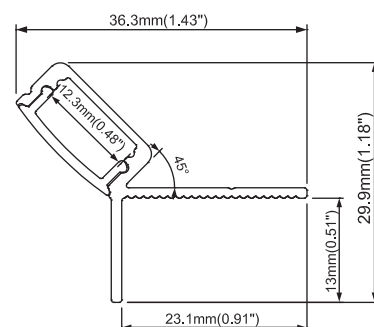

Types of installation:




Material: Extruded aluminum
Dimension: 36.3×29.9mm
Length: MAX 5m

ACCESSORIES



Plastic end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



FINISH




Anod. aluminum white Black




Types of installation:



Material: Extruded aluminum
Dimension: 19.5×42.5mm
Length: MAX 5m
Compatible with 16mm drywall



ALP084-S

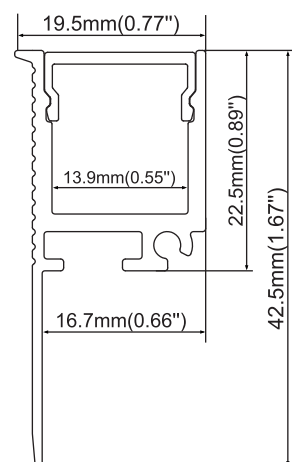

ACCESSORIES



Plastic end cap
with hole/without hole




FINISH



PC diffused cover



180° Connector
90° Vertical connector
90° Horizontal connector



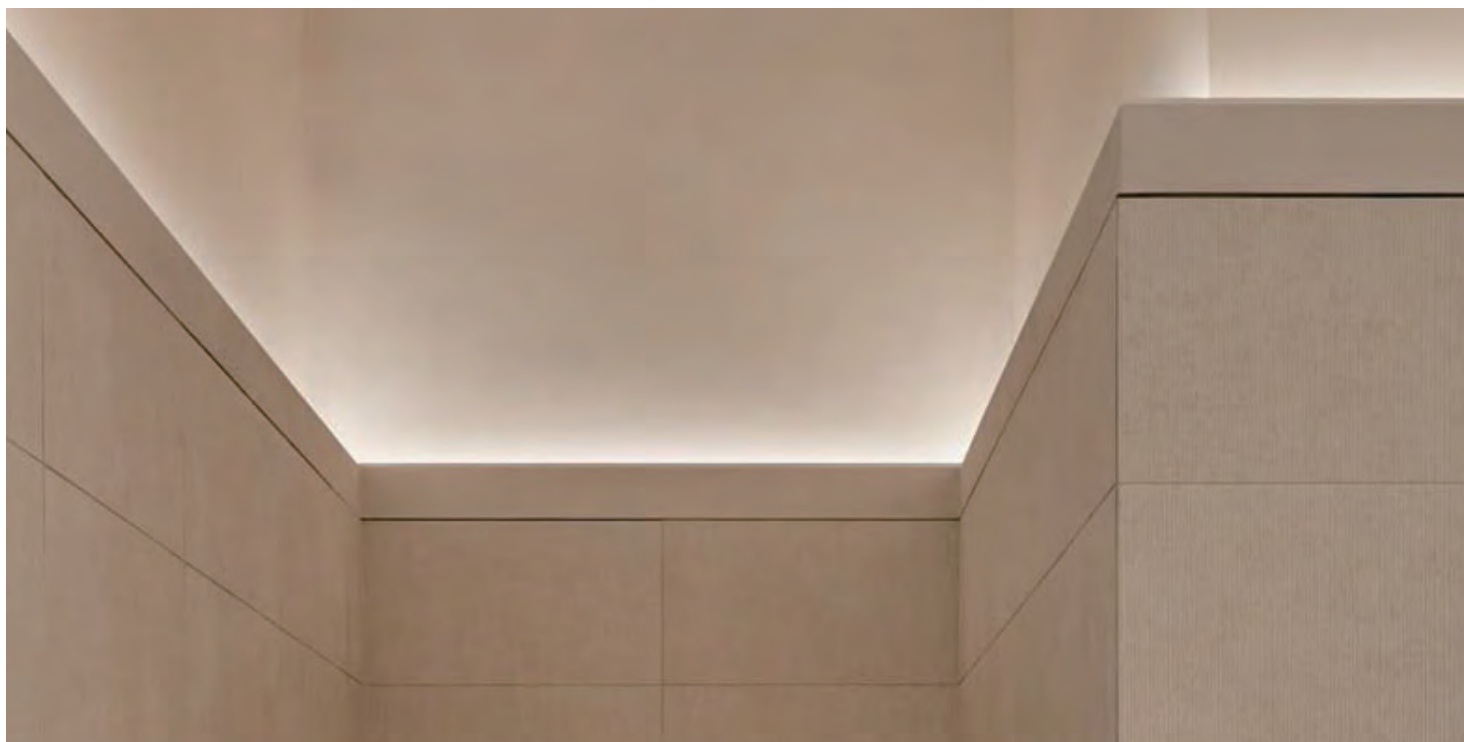


Types of installation:



Material: Extruded aluminum
Dimension: 43.9×18.5mm
Length: MAX 5m
Compatible with 16mm drywall

ALP084-R

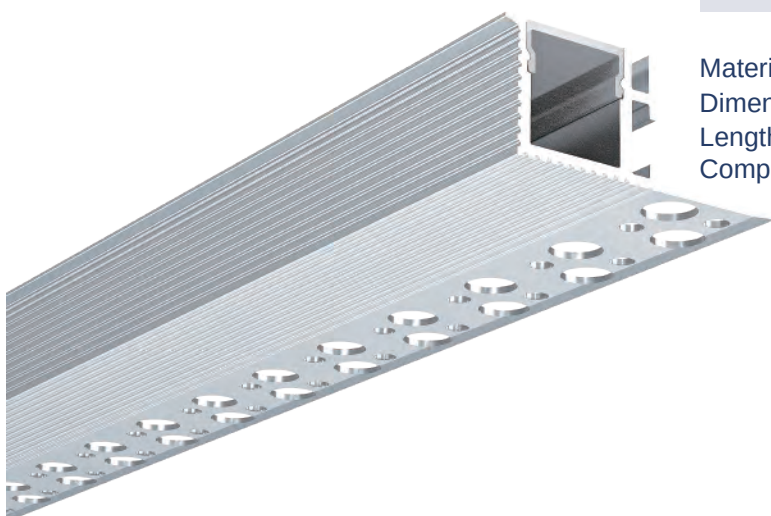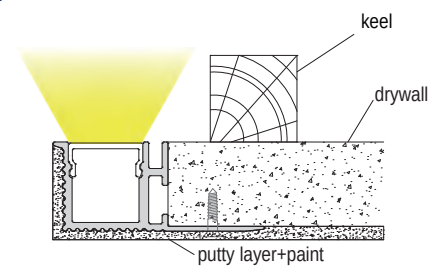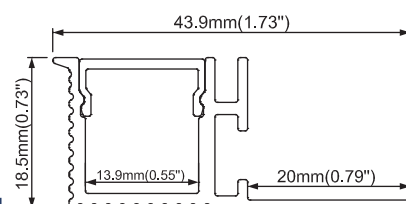

ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover



180° Connector
90° Vertical connector
90° Horizontal connector

FINISH



IP20



white






Types of installation:



Material: Extruded aluminum
Dimension: 14.8×38.5mm
Length: MAX 5m
Compatible with 12.5mm drywall

ALP185

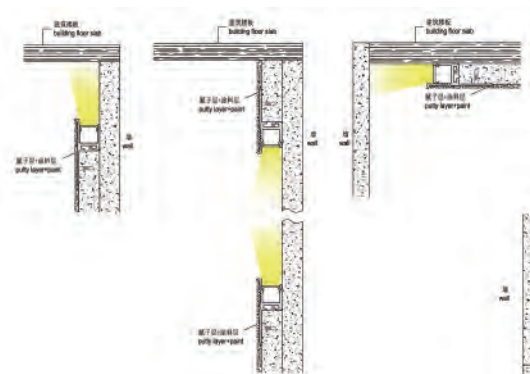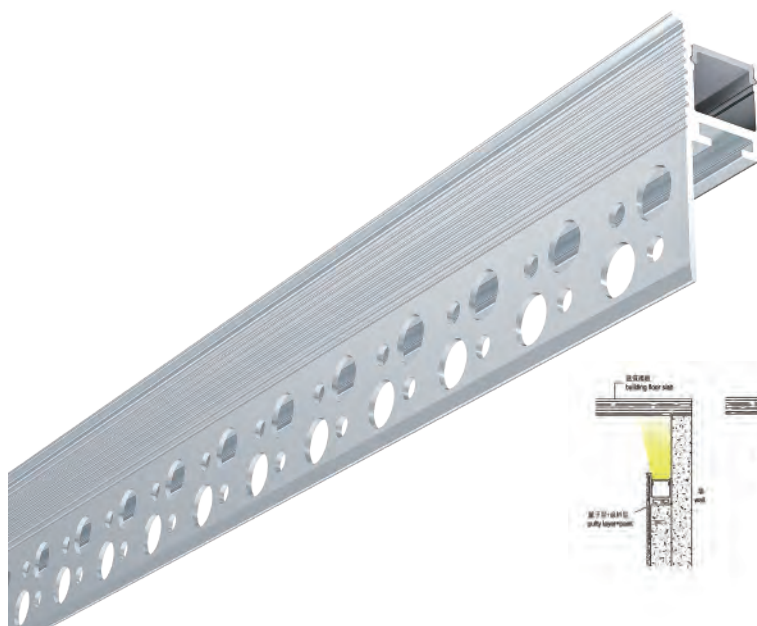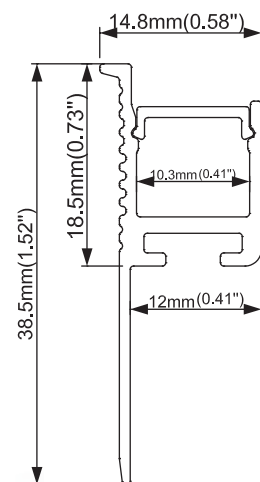

ACCESSORIES



Plastic end cap
with hole/without hole



IP20



FINISH



Anod. aluminum



white




Black



PC diffused cover



180° Connector
90° Vertical connector
90° Horizontal connector

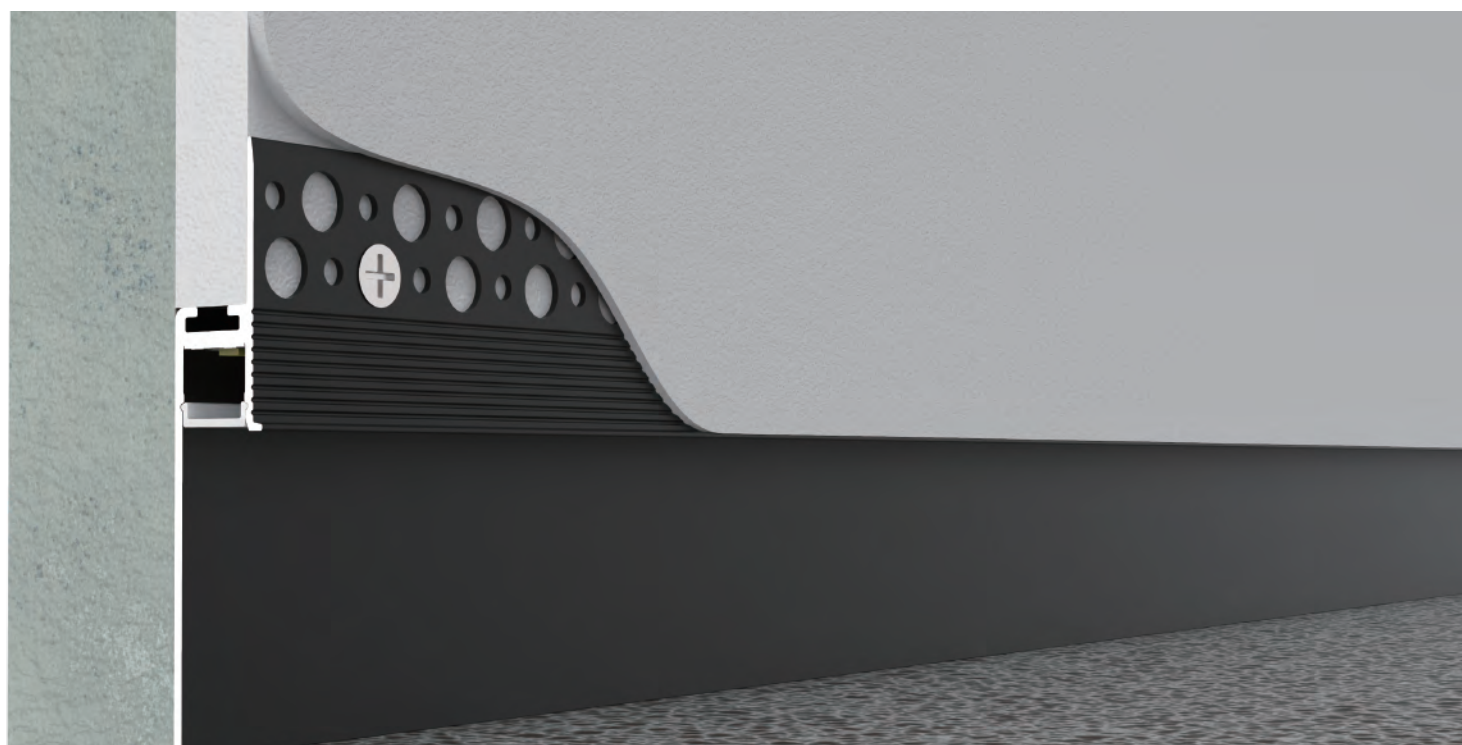

ALP187

Types of installation:



Material: Extruded aluminum
Dimension: 14.8×90.8mm
Length: MAX 5m
Compatible with 12.5mm drywall


ACCESSORIES



Plastic end cap
with hole/without hole



PC diffused cover

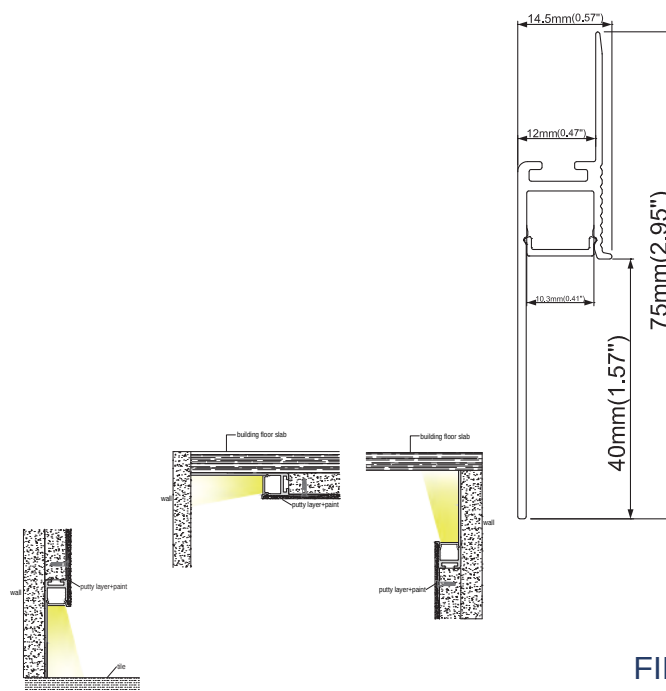

FINISH




white



IP20





180° Connector
90° Vertical connector
90° Horizontal connector

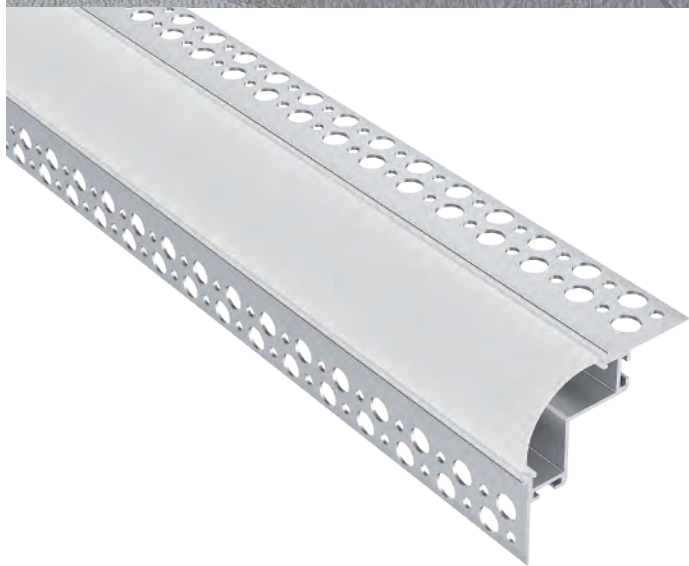

Types of installation:



Material: Extruded aluminum
Dimension: 54.3×54.3mm
Length: MAX 5m

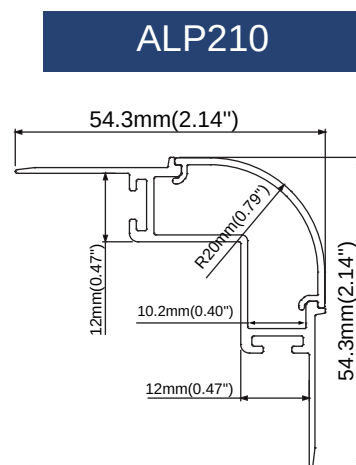

The corners of the space are rounded and illuminated to show the soft feeling of the space.

ACCESSORIES



Plastic end cap
with hole/without hole



PC frosted cover



90° Vertical connector
180° Connector
90° Horizontal connector



FINISH



Anod. aluminum white Black




Types of installation:



Material: Extruded aluminum
Dimension: 134.59×52.2mm
Length: MAX 5m



ALP059-TR

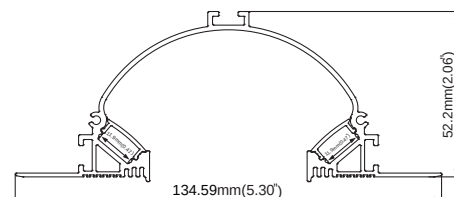

ACCESSORIES



Aluminum end cap
without hole




PC semi-clear cover
PC diffused cover



white

FINISH


180° Connector
90° Vertical connector
90° Horizontal connector

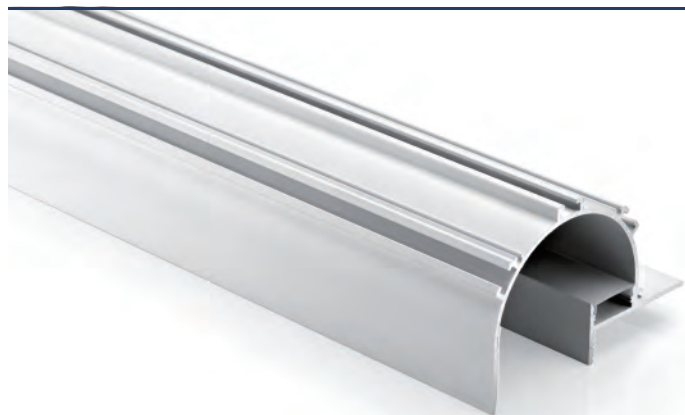

ACCESSORIES



Aluminum end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover

Types of installation:



Material: Extruded aluminum
Dimension: 101×67.8mm
Length: MAX 5m




IP20




FINISH



white




LED Strip
12.5mm Drywall
Wall

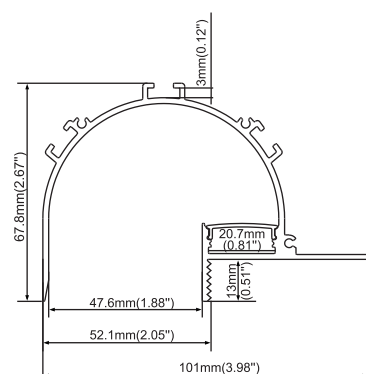


LED Strip
12.5mm Drywall




Clip for ceiling
Clip for wall

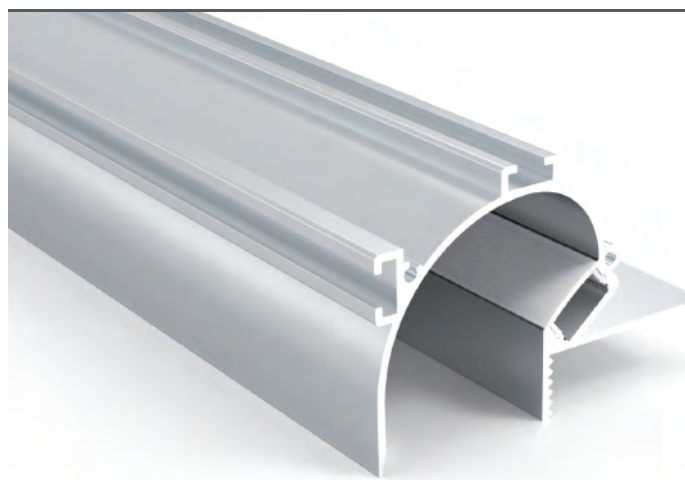

ACCESSORIES



Aluminum end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover

Types of installation:



Material: Extruded aluminum
Dimension: 76.4×51.5mm
Length: MAX 5m



IP20




FINISH



white



LED Strip
12.3mm (0.48")
35mm (1.38")
39.1mm (1.54")
76.4mm (3.01")
13mm (0.51")

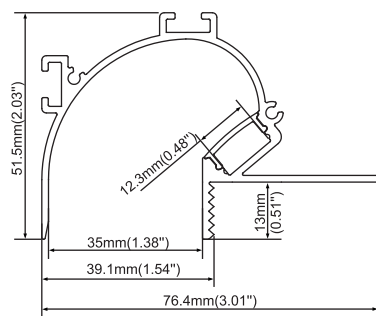

LED Strip
12.3mm (0.48")
35mm (1.38")
39.1mm (1.54")
76.4mm (3.01")
13mm (0.51")



Clip for wall
Clip for ceiling




Types of installation:



Material: Extruded aluminum
Dimension: 94.4×34mm
Length: MAX 5m



ALP126

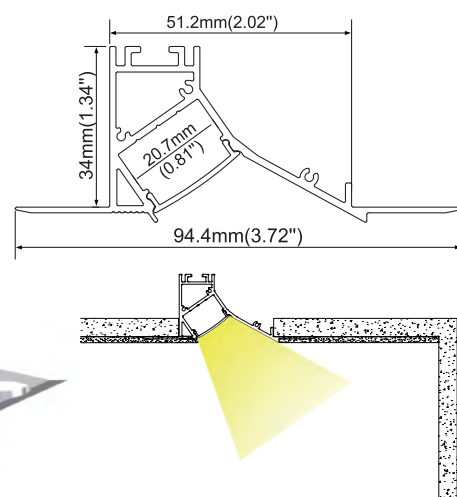

FINISH



white




IP20



ACCESSORIES



Aluminum end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover






Types of installation:



Material: Extruded aluminum
Dimension: 85.5×56.8mm
Length: MAX 5m


ALP127

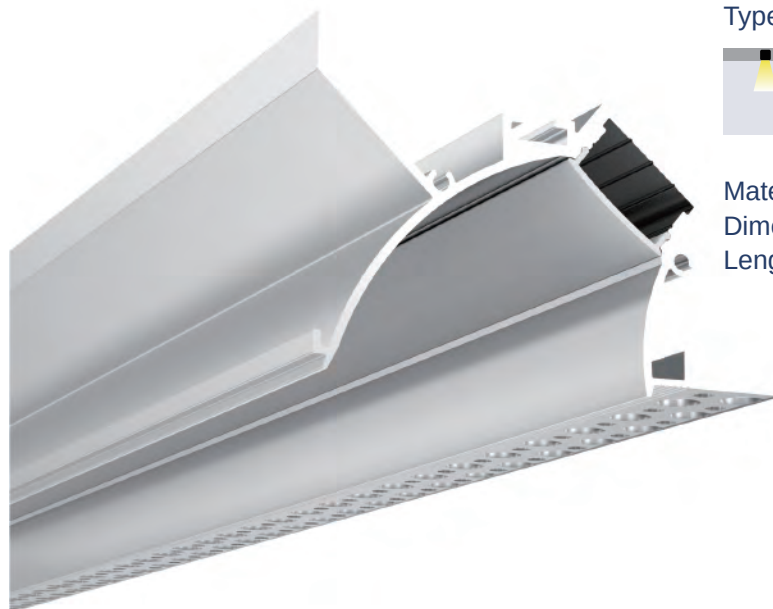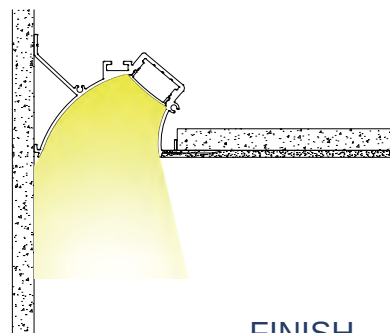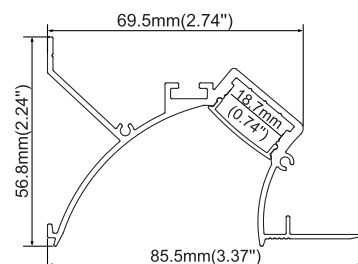

ACCESSORIES



Aluminum end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



180° Connector
90° Vertical connector
90° Horizontal connector


FINISH



IP20





white

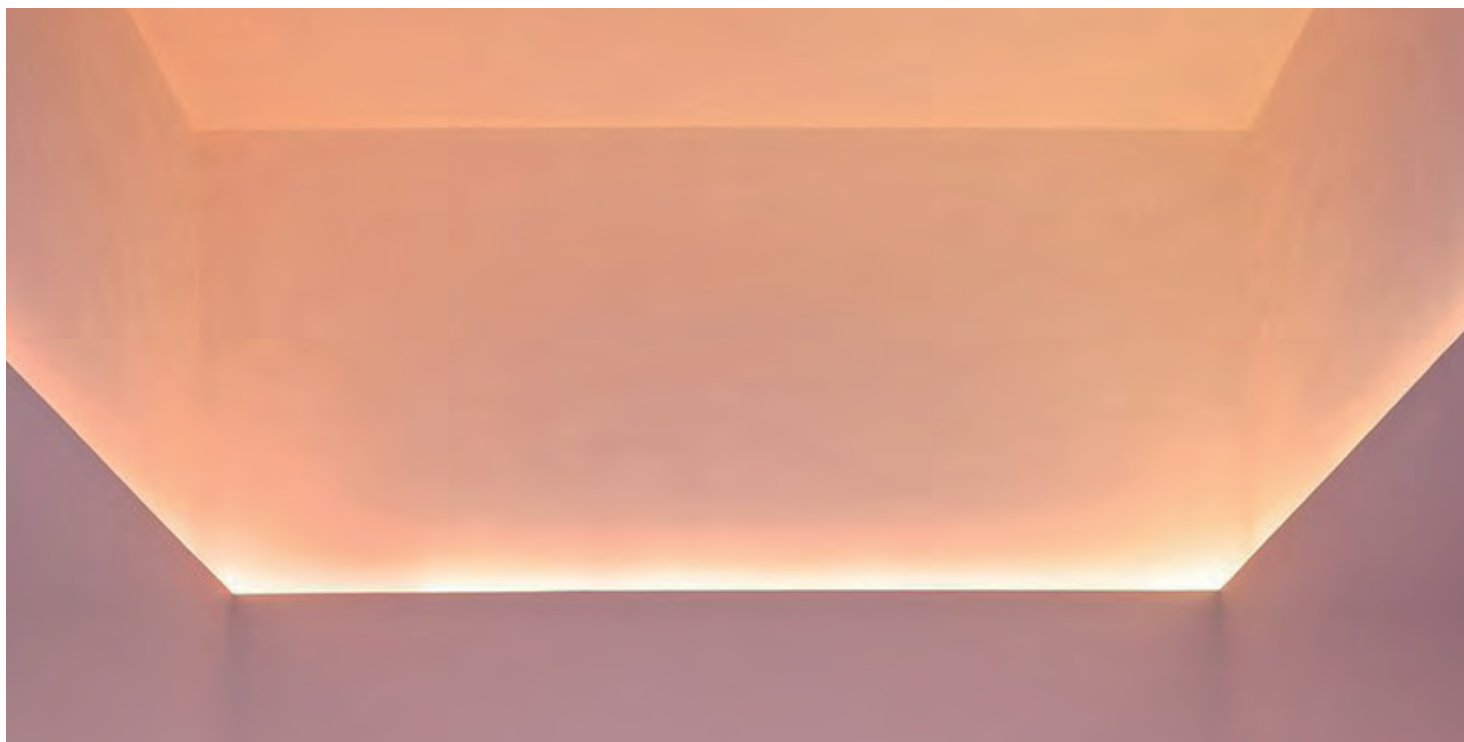

Types of installation:



Material: Extruded aluminum
Dimension: 35×95.7mm
Length: MAX 5m
Compatible with 12.5mm drywall

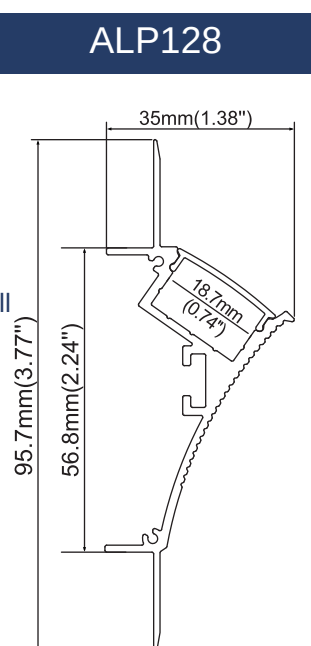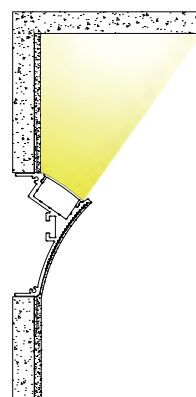

ALP128

ACCESSORIES



Aluminum end cap
without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover




180° Connector
90° Vertical connector
90° Horizontal connector

FINISH



white

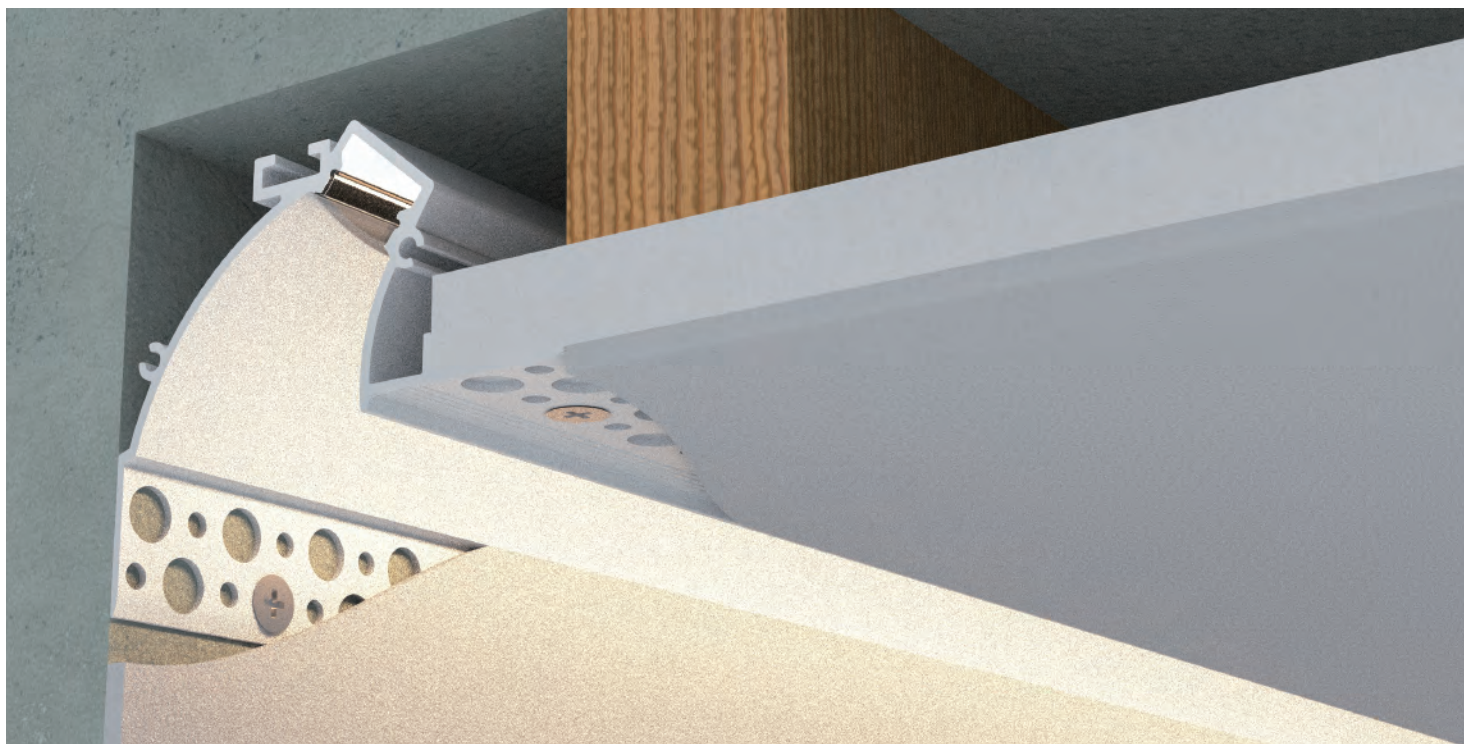


Types of installation:



Material: Extruded aluminum
Dimension: 72.3×58.9mm
Length: MAX 5m


ALP127-R

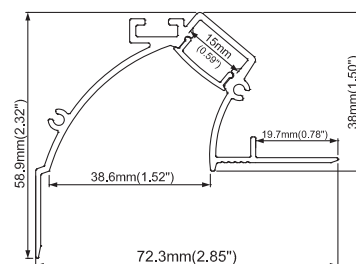

FINISH




white



ACCESSORIES




Aluminum end cap
with hole/without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover




180° Connector
90° Vertical connector
90° Horizontal connector

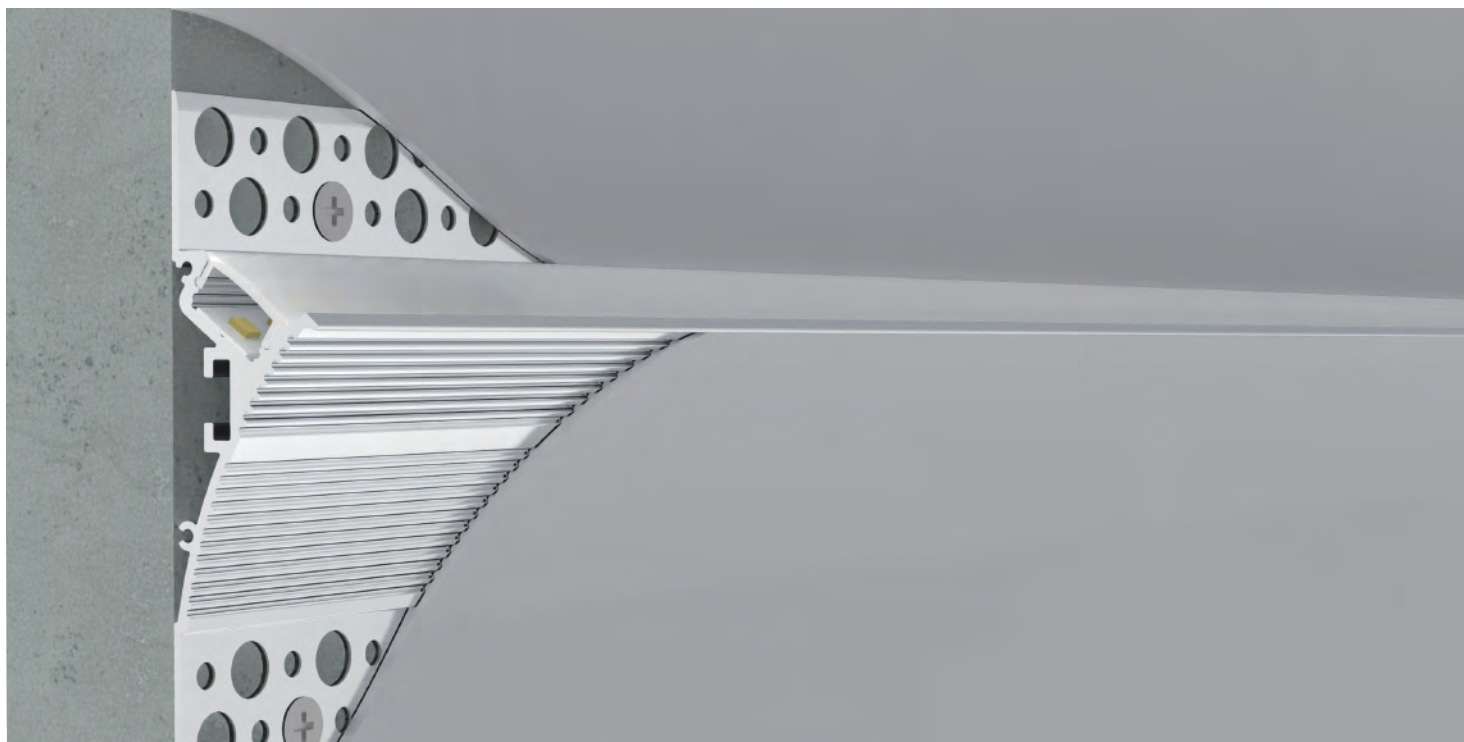

Types of installation:




Material: Extruded aluminum
Dimension: 88×23.7mm
Length: MAX 5m

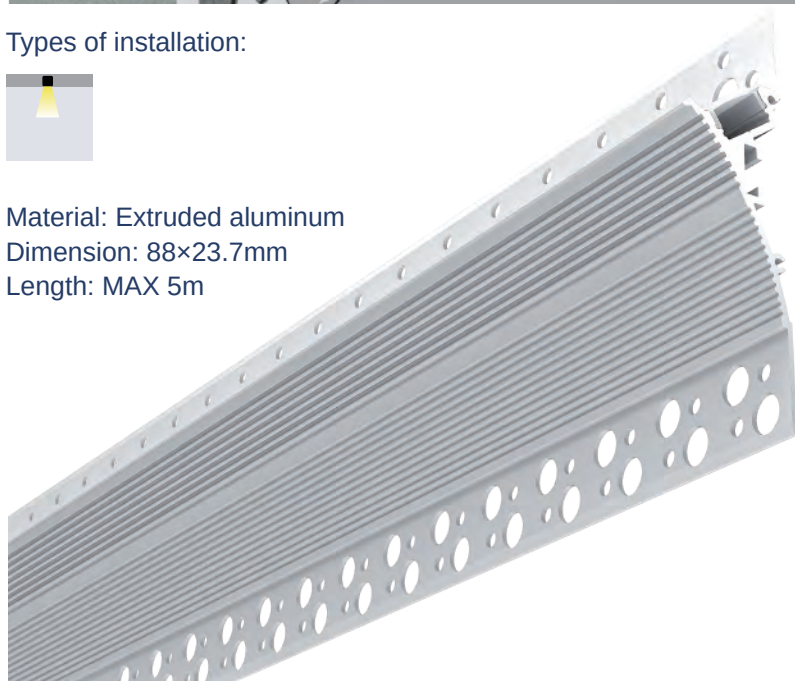

ACCESSORIES



Aluminum end cap
with hole/without hole




PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



180° Connector
90° Vertical connector
90° Horizontal connector

ALP128-R

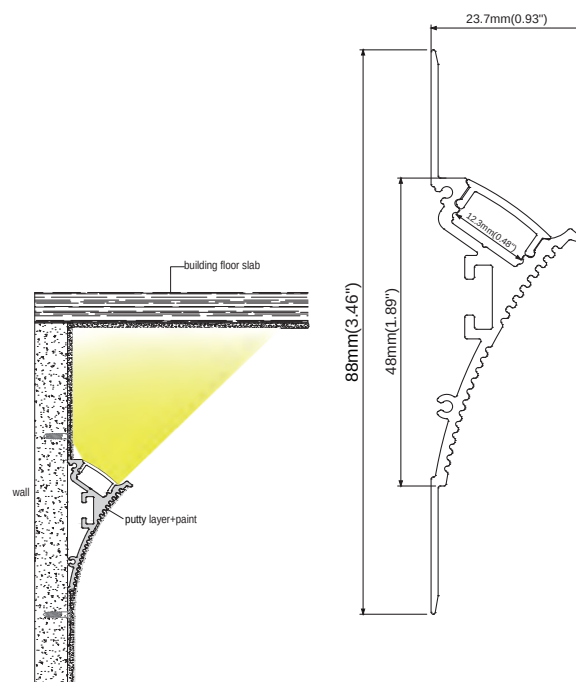

FINISH



white



IP20





Types of installation:




Material: Extruded aluminum
Dimension: 23.5×57.8mm
Length: MAX 5m



IP20




ALP188

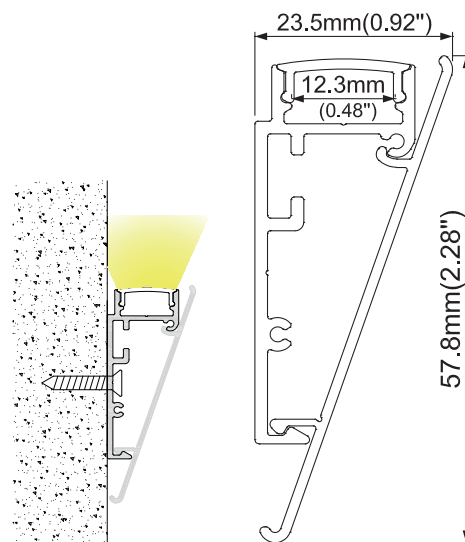

ACCESSORIES



Aluminum end cap
without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover

FINISH



Anod. aluminum



white



Black




Bronze



Golden



180° Connector
90° Vertical connector
90° Horizontal connector

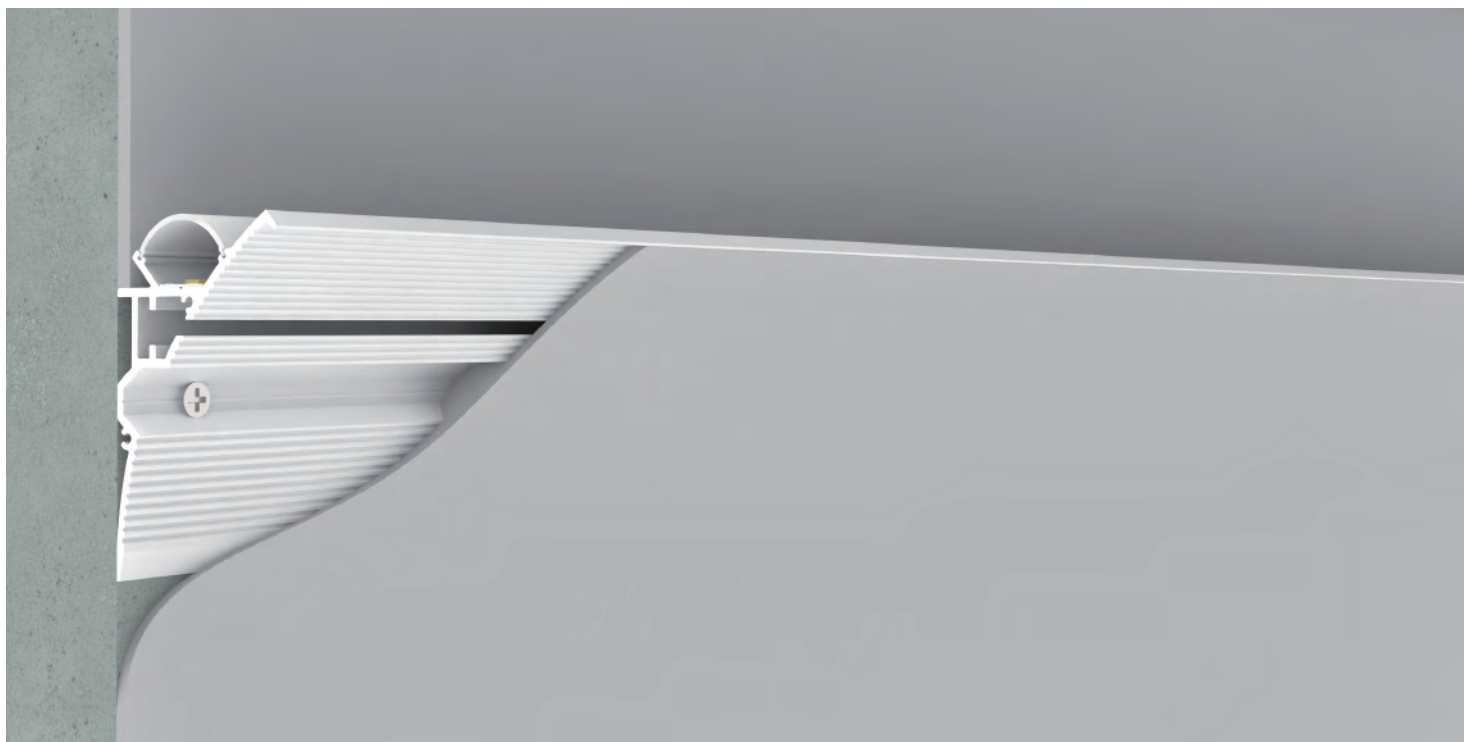



Types of installation:



Material: Extruded aluminum
Dimension: 36.9×60mm
Length: MAX 5m



ALP189

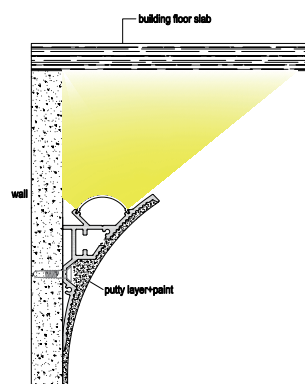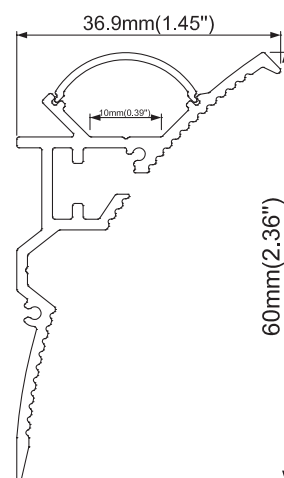

ACCESSORIES




Aluminum end cap
without hole



FINISH




Anod. aluminum white Black



PMMA opal matte cover
PMMA semi-clear cover
PC diffused cover



180° Connector
90° Vertical connector
90° Horizontal connector



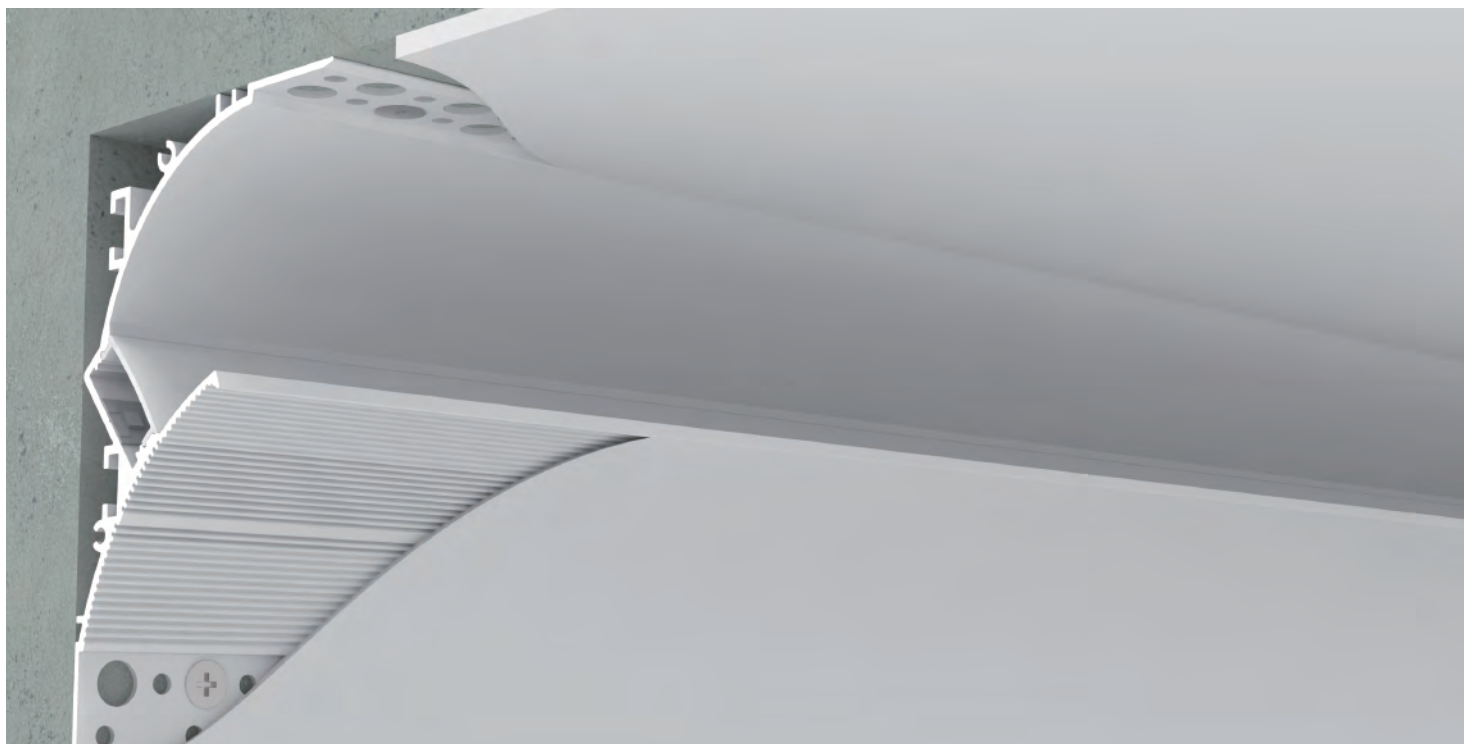


Types of installation:



Material: Extruded aluminum
Dimension: 66×104mm
Length: MAX 5m

ALP194

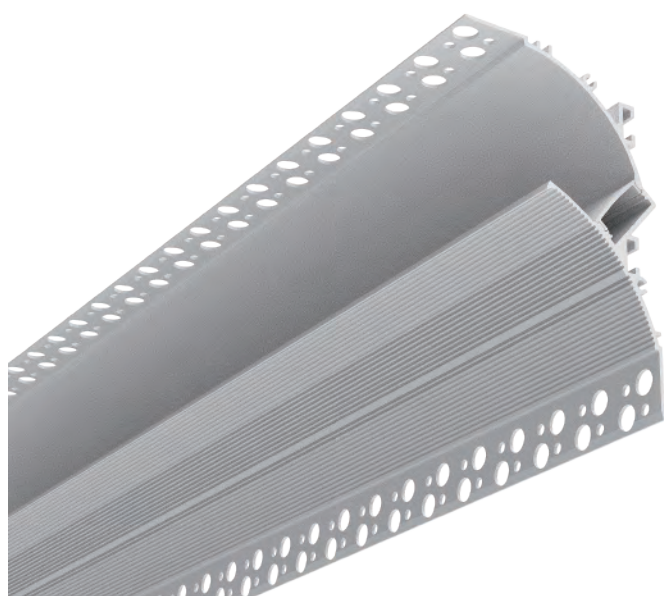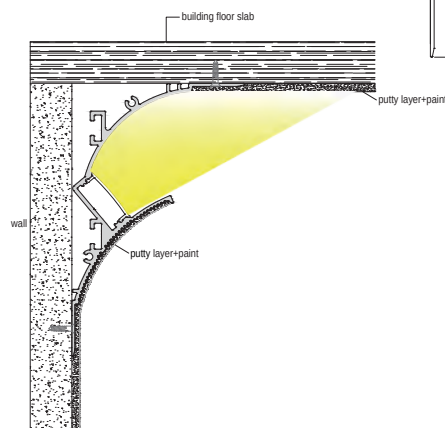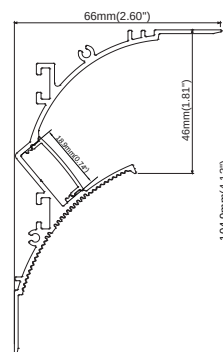

ACCESSORIES



Aluminum end cap
without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



180° Connector
90° Vertical connector
90° Horizontal connector

FINISH



white



IP20






ALP197

Types of installation:



Material: Extruded aluminum
Dimension: 64×136mm
Length: MAX 5m

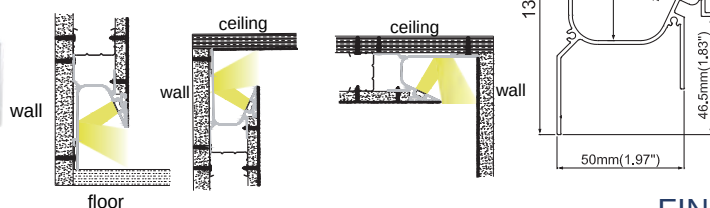

FINISH




white

ACCESSORIES



Plastic end cap
with hole/without hole




PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover



Mounting clip(metal)




180° Connector
90° Vertical connector
90° Horizontal connector

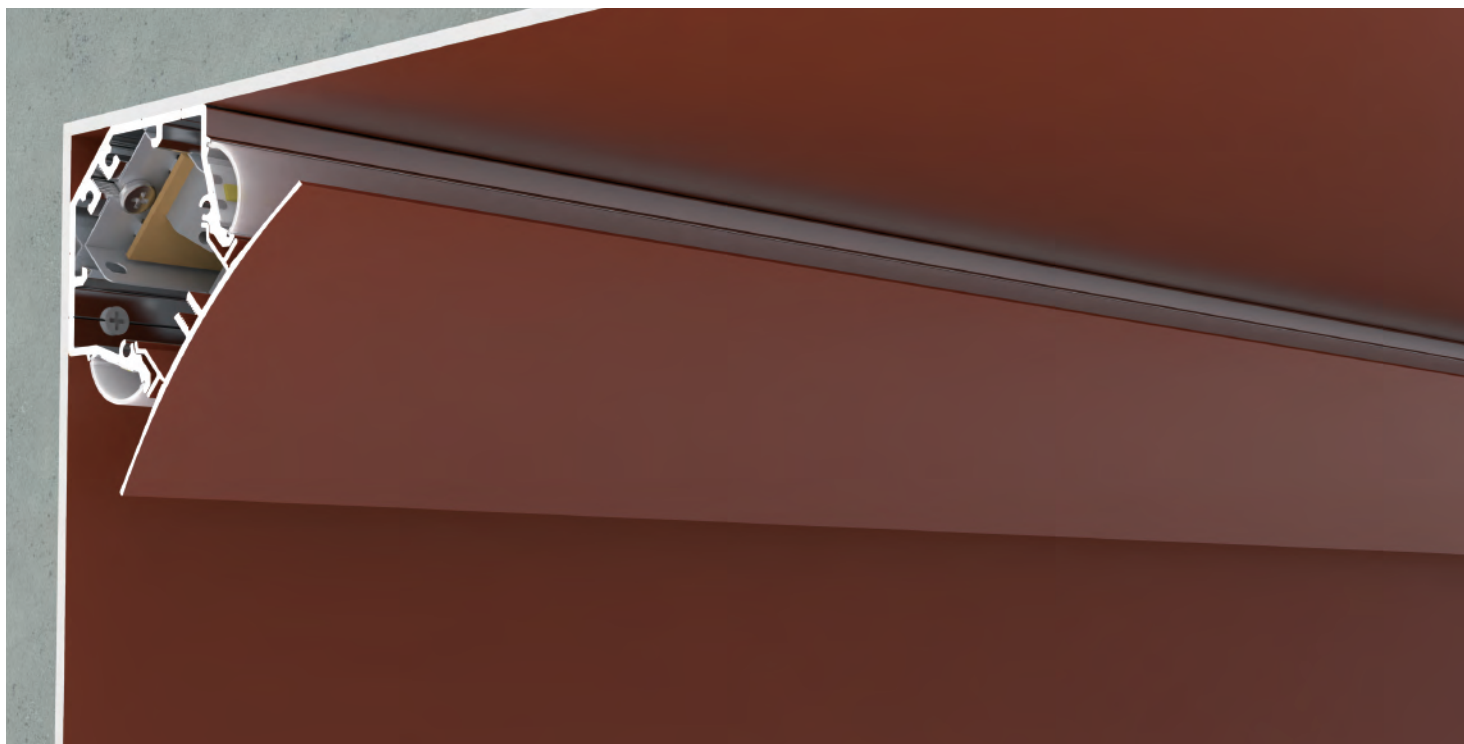


Types of installation:



Material: Extruded aluminum
Dimension: 76.2×76.2mm
Length: MAX 5m




ALP190

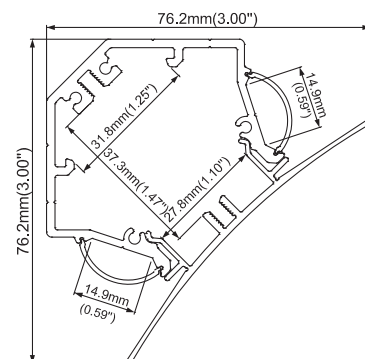

ACCESSORIES



Aluminum end cap
without hole



PMMA opal matte cover
PMMA semi-clear cover
PC diffused cover



IP20



FINISH



Anod. aluminum




white



Black




180° Connector
90° Vertical connector

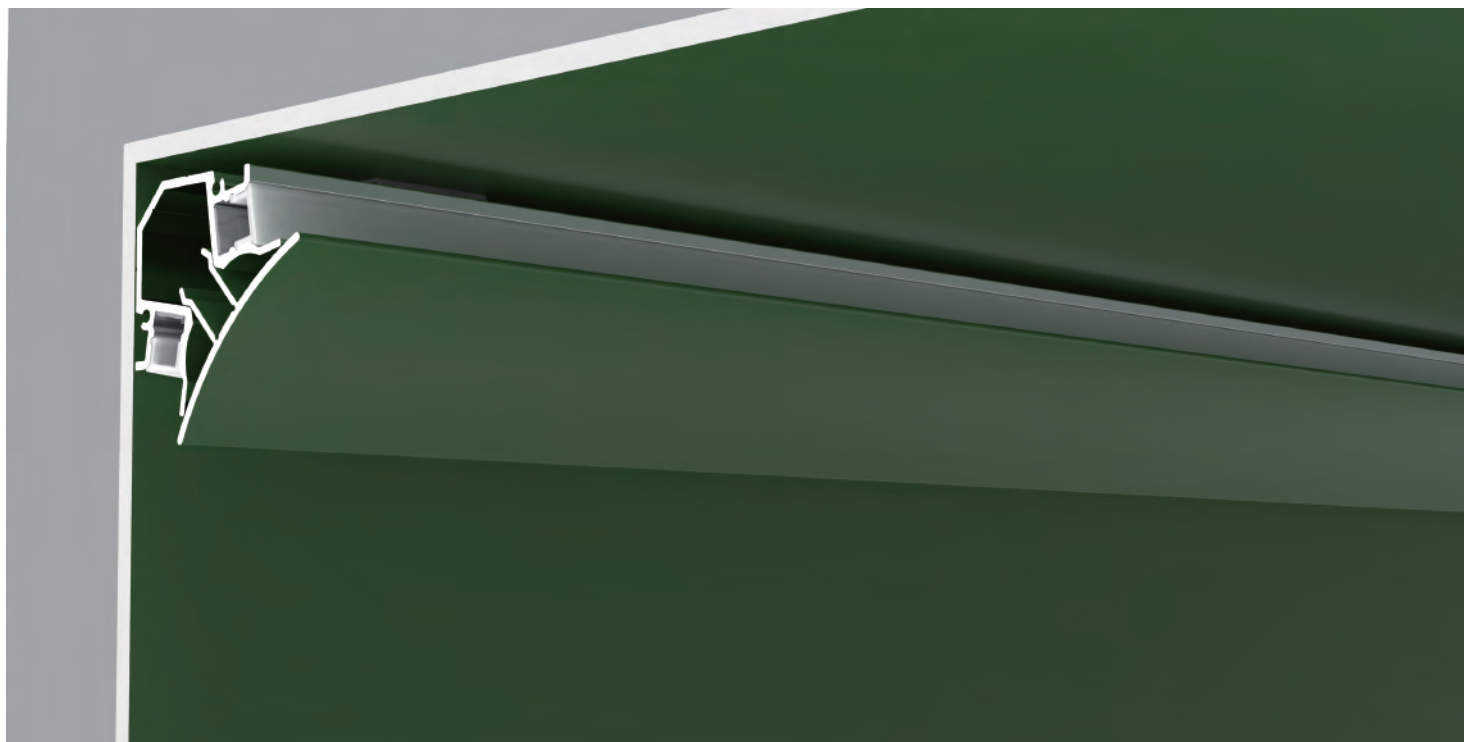


Types of installation:



Material: Extruded aluminum
Dimension: 38.7×39mm
Length: MAX 5m



ALP191



ACCESSORIES



Aluminum end cap
without hole



FINISH



Anod. aluminum



white




Black



PC diffused cover



Mounting clip (metal)

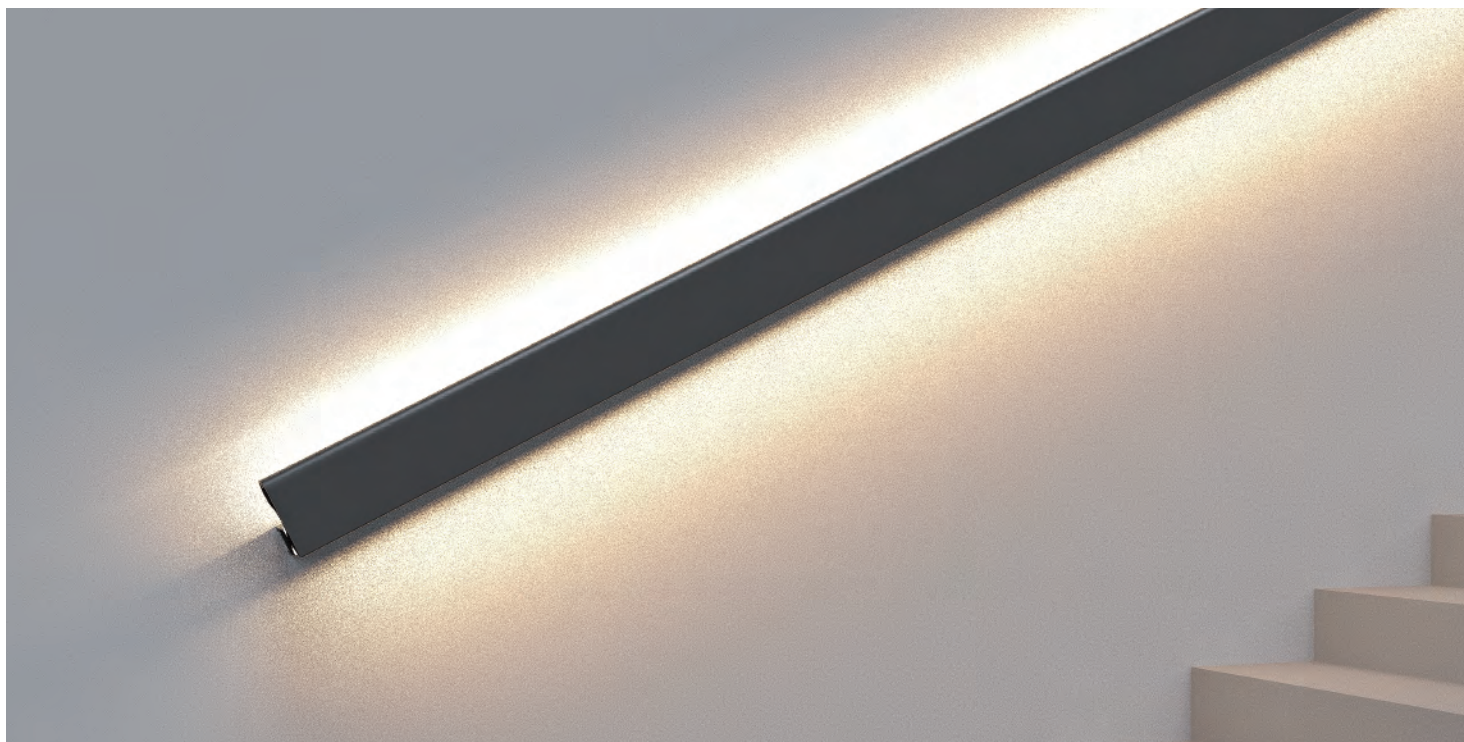

Types of installation:




Material: Extruded aluminum
Dimension: 78.8×95mm
Length: MAX 5m



ACCESSORIES



Aluminum end cap
without hole



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover

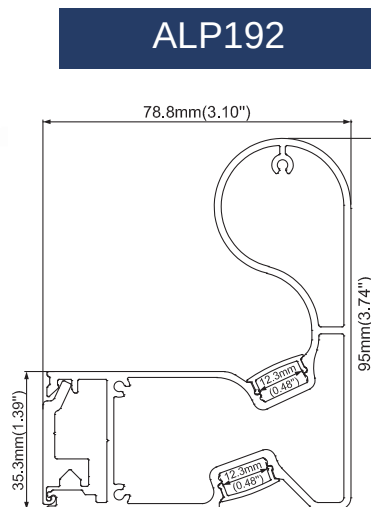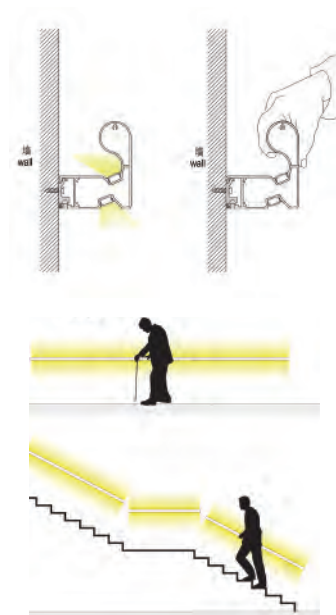

ALP192



FINISH



Anod. aluminum white Black



180° Connector

ALP141




Types of installation:



Material: Extruded aluminum

Dimension: 24×21.2mm

Length: MAX 5m

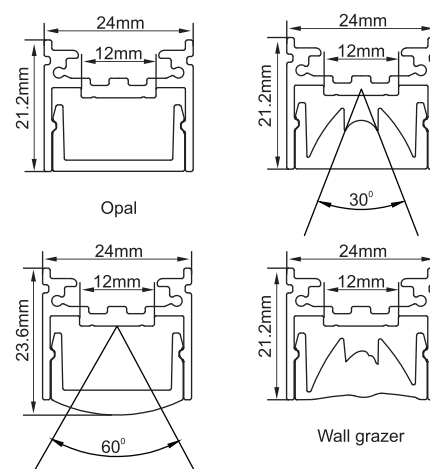

FINISH



Anod. aluminum


white

Black


ACCESSORIES




Aluminum end cap
with hole/without hole

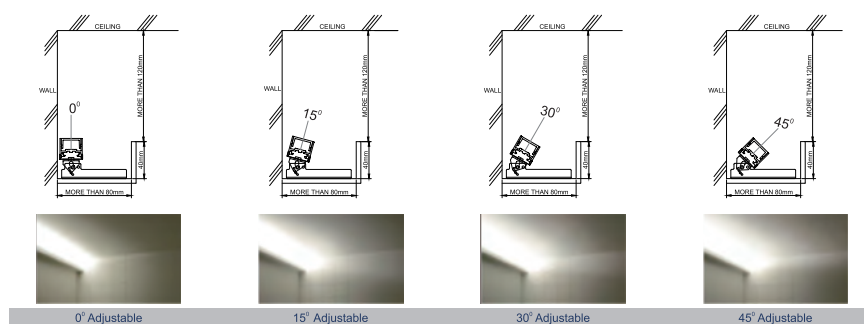

PMMA 30° lens
PMMA 60° lens
PMMA wall grazer lens



PC diffused cover



Mounting clip (metal)



Adjustable bracket



180° Connector
90° Horizontal connector



Steel wire



Types of installation:



Material: Extruded aluminum

Dimension: $\phi 28\text{mm}$

Length: MAX 5m



IP20



FINISH



Anod. aluminum




white




Black


ALP142

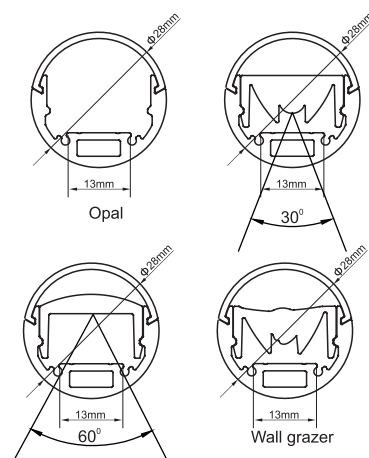

ALP142-A



ALP142-B

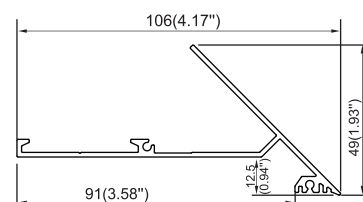

ACCESSORIES



Aluminum end cap
without hole




Hanging end caps



PMMA 30° lens
PMMA 60° lens
PMMA wall grazer lens




Clear/Black Mounting clip (PC)



PC clear cover
PC diffused cover



Steel wire

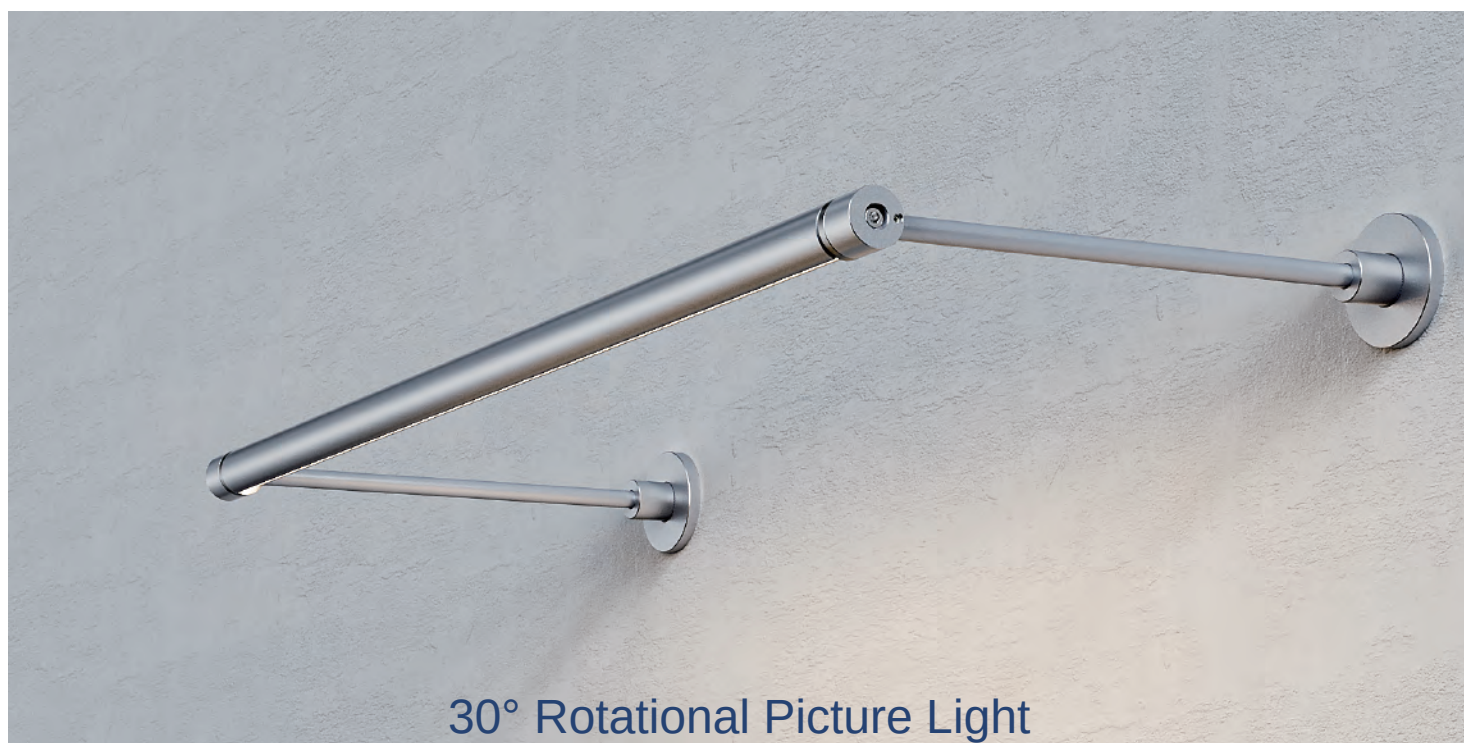


Types of installation:




Material: Extruded aluminum
Dimension: $\phi 19.5\text{mm}$
Length: MAX 5m



ALP218




FINISH

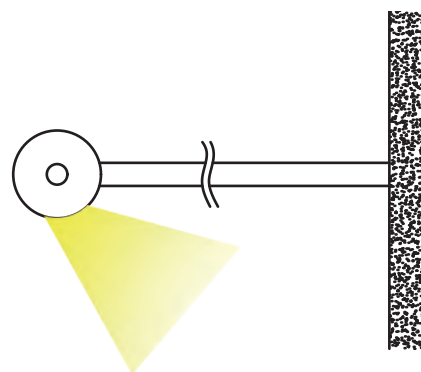


ACCESSORIES



Wall lamp rod
(Length: 262mm)
Length can be customized



Asymmetric Lens
(Length: 1140mm)

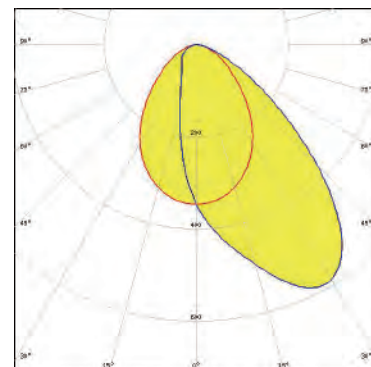

Asymmetric Lens

Types of installation:





Material: Extruded aluminum

Dimension: 13×15.03mm

Length: MAX 5m



ALP227



FINISH



Anod. aluminum



white



Black



IP20



ACCESSORIES



Plastic end cap
with hole/without hole




Asymmetric Lens
(Length: 1140mm)




Lens 30°
(Length: 1140mm)




Lens 55°
(Length: 1140mm)



Asymmetric Lens



Lens 30°



Lens 55°



Mounting clip (metal)

Types of installation:





Material: Extruded aluminum

Dimension: 13×9.43mm

Length: MAX 5m



ALP228



FINISH



Anod. aluminum



white



Black


ACCESSORIES




Plastic end cap
with hole/without hole




Asymmetric Lens
(Length: 1140mm)



Asymmetric Lens



Lens 30°




Lens 55°



Lens 30°
(Length: 1140mm)



Lens 55°
(Length: 1140mm)



Magnet



Mounting clip (metal)

Types of installation:





Material: Extruded aluminum

Dimension: 24.54×13.7mm

Length: MAX 5m



ALP229

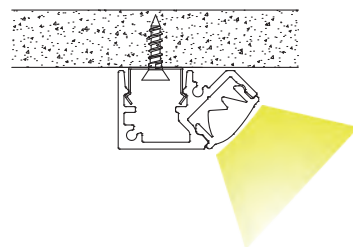

FINISH



Anod. aluminum



white



Black



IP20



ACCESSORIES



Aluminum end cap
with hole/without hole




Lens 30°
(Length: 1140mm)




Lens 55°
(Length: 1140mm)



Mounting clip (metal)



Lens 30°



Lens 55°

Types of installation:





Material: Extruded aluminum

Dimension: 44×25mm

Length: MAX 5m



ALP225

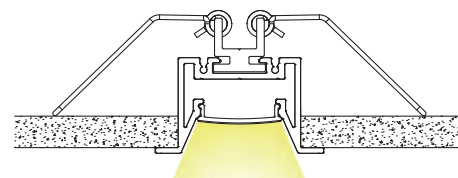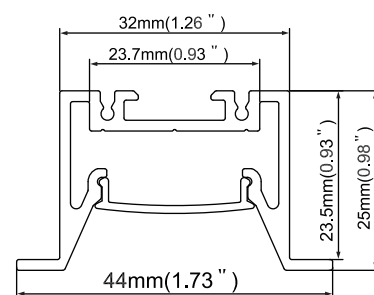

FINISH



Anod. aluminum



white




Black



IP20




ACCESSORIES

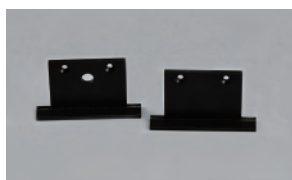

Aluminum end cap
with hole/without hole



PC semi-clear cover
PC diffused cover



Black PC frosted cover



180° Connector
90° Horizontal connector
90° Vertical connector



Spring clip



135° Vertical connector
135° Horizontal connector


Types of installation:





Material: Extruded aluminum

Dimension: 32×24.92mm


Length: MAX 5m

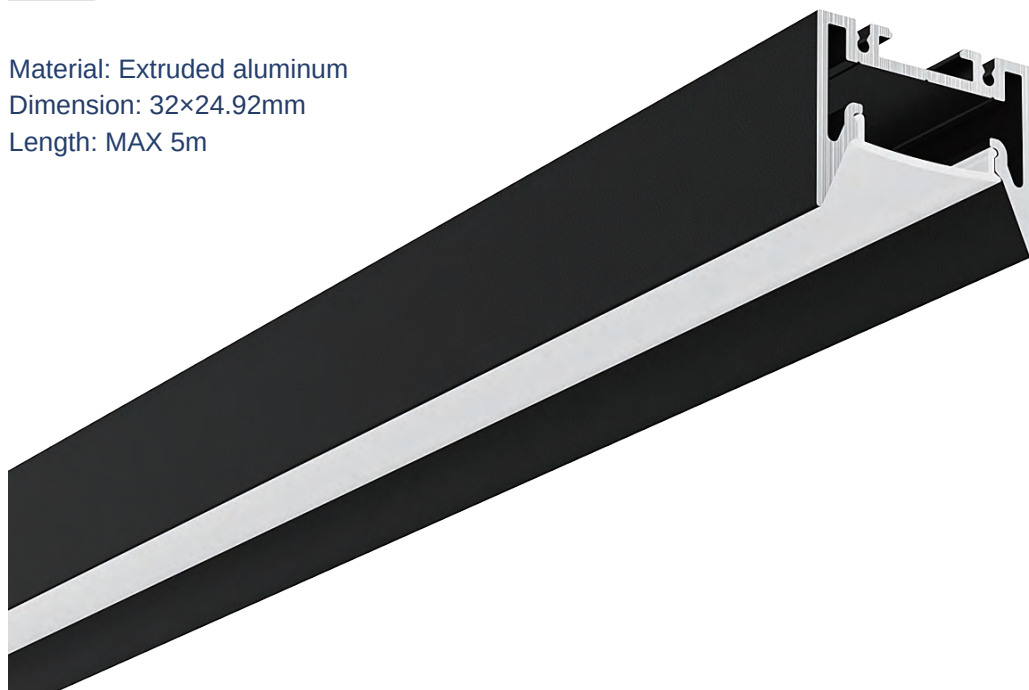

ALP226



ACCESSORIES

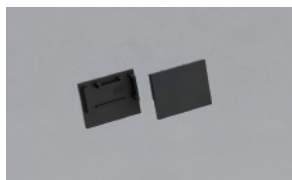

Plastic end cap
without hole



PC semi-clear cover
PC diffused cover



Steel wire
Hanging bracket



Mounting clip(metal)



FINISH



Anod. aluminum

white

Black



180° Connector
90° Horizontal connector
90° Vertical connector
135° Vertical connector
135° Horizontal connector

Types of installation:





Material: Extruded aluminum

Dimension: 24×25.2mm

Length: MAX 5m

MAG2425-R

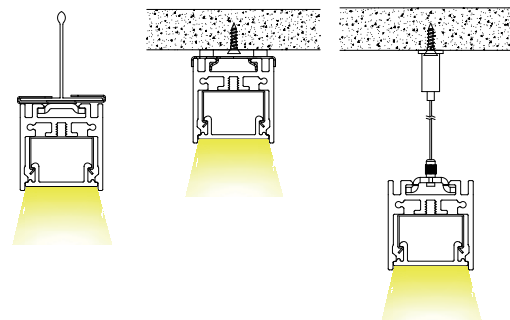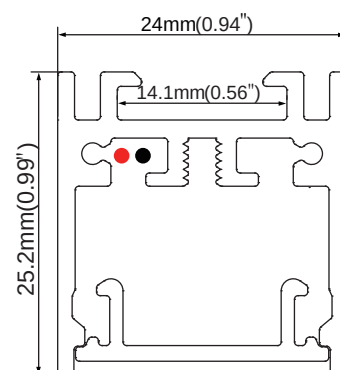


FINISH




ACCESSORIES



Aluminum end cap
without hole



PC clear prismatic cover
PC semi-clear prismatic cover



PC frosted cover
Black PC frosted cover



Wall washer lens



Black louver optic 30° or 55°
White louver optic 30° or 55°
Chrome louver optic 30° or 55°



T-bar clip
Mounting clip (metal)



Adjustable bracket



Steel wire

Types of installation:




Material: Extruded aluminum

Dimension: 34×25.2mm

Length: MAX 5m



MAG3425

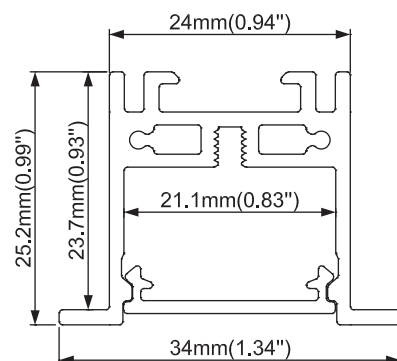

IP20



FINISH



Anod. aluminum



white




Black

ACCESSORIES




Aluminum end cap
without hole



PC frosted cover
Black PC frosted cover



Wall washer lens

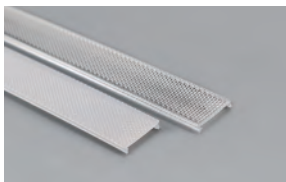

PC clear prismatic cover
PC semi-clear prismatic cover



Black louver optic 30° or 55°
White louver optic 30° or 55°
Chrome louver optic 30° or 55°



Spring clip


Types of installation:



Material: Extruded aluminum

Dimension: 24×25.2mm

Length: MAX 5m

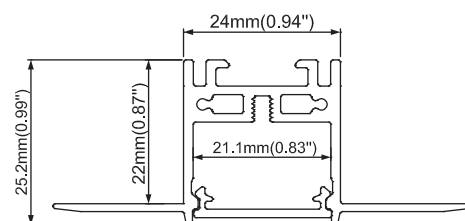

MAG6425

FINISH



Anod. aluminum



white



Black




IP20




ACCESSORIES



Aluminum end cap
without hole

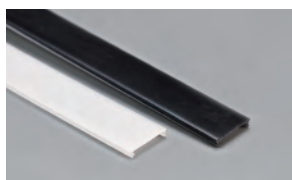

PC frosted cover
Black PC frosted cover

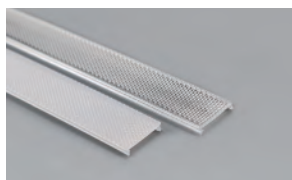

PC clear prismatic cover
PC semi-clear prismatic cover



Wall washer



Black louver optic 30° or 55°
White louver optic 30° or 55°
Chrome louver optic 30° or 55°

Types of installation:




Material: Extruded aluminum

Dimension: 24×30.4mm

Length: MAX 5m



MAG2430

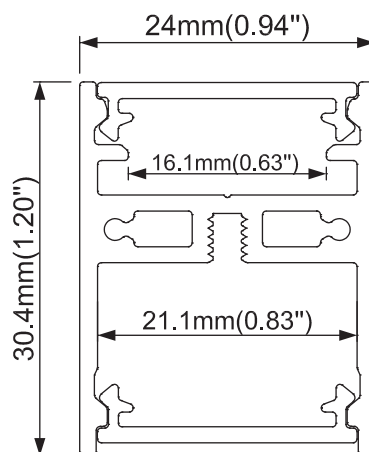

IP20



FINISH



Anod. aluminum




white




Black


ACCESSORIES



Aluminum end cap
without hole



PC frosted cover
Black PC frosted cover



PC clear prismatic cover
PC semi-clear prismatic cover



Wall washer lens



Black louver optic 30° or 55°
White louver optic 30° or 55°
Chrome louver optic 30° or 55°



Hanging bracket



Steel wire

Types of installation:




Material: Extruded aluminum

Dimension: 24×75mm

Length: MAX 5m



MAG2475

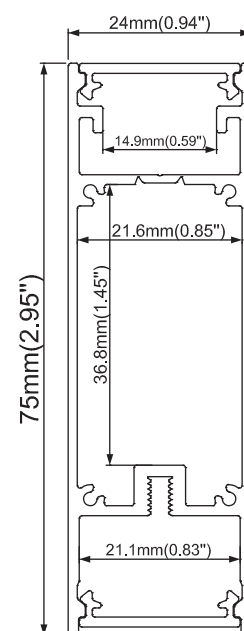

ACCESSORIES



FINISH




Anod. aluminum

white


Black



Aluminum end cap
without hole



PC frosted cover
Black PC frosted cover



PC clear prismatic cover
PC semi-clear prismatic cover



Wall washer lens



Black louver optic 30° or 55°
White louver optic 30° or 55°
Chrome louver optic 30° or 55°



Hanging bracket



Steel wire

Types of installation:




Material: Extruded aluminum

Dimension: 24×90mm

Length: MAX 5m



MAG2490

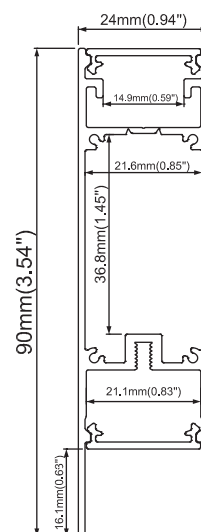

IP20



FINISH



Anod. aluminum



white




Black


ACCESSORIES



Aluminum end cap
without hole




PC frosted cover
Black PC frosted cover



PC clear prismatic cover
PC semi-clear prismatic cover



Wall washer lens

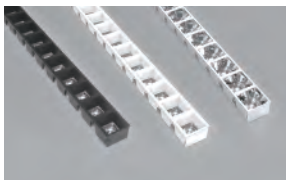

Black louver optic 30° or 55°
White louver optic 30° or 55°
Chrome louver optic 30° or 55°



Hanging bracket



Steel wire

Types of installation:




Material: Extruded aluminum

Dimension: 78×50mm

Length: MAX 5m



MAG7850

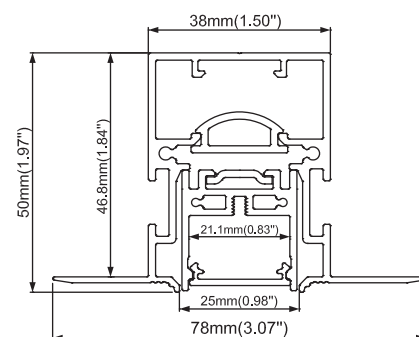

FINISH



Anod. aluminum



white



Black




IP20




ACCESSORIES



Aluminum end cap
without hole




PC frosted cover
Black PC frosted cover



PC clear prismatic cover
PC semi-clear prismatic cover




Wall washer lens



Black louver optic 30° or 55°
White louver optic 30° or 55°
Chrome louver optic 30° or 55°



Internal Clip



PVC cover

Types of installation:




Material: Extruded aluminum

Dimension: 33.6×75mm

Length: MAX 5m



LS30

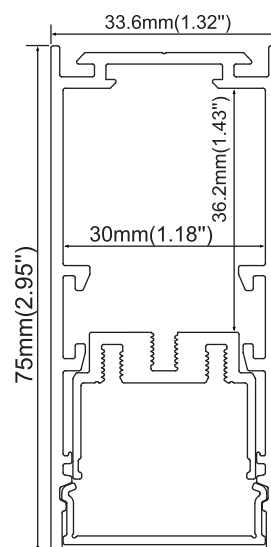

FINISH



Anod. aluminum




white



Black


ACCESSORIES



CNC end caps



PC frosted cover



Blind cover



Reflector: 15°, 30°, 45°



Internal clip



90° Horizontal connector (bottom)
90° Vertical connector (side)



180° Connector



90° Vertical connector (bottom)
90° Horizontal connector (side)



Outside clip



Steel wire

LS30

Free combination



LS30-4A



LS30-4B



LS30-2A



LS30-8A

Types of installation:




Material: Extruded aluminum

Dimension: 48.6×32.5mm

Length: MAX 5m



LS30-T

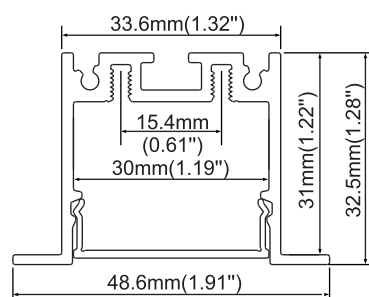

IP20



FINISH



Anod. aluminum



white



Black


ACCESSORIES



Aluminum end cap
without hole



PC frosted cover



Blind cover



Reflector: 15°, 30°, 45°



180° Connector
90° Horizontal connector
90° Vertical connector



Spring clip

Types of installation:




Material: Extruded aluminum

Dimension: 73.6×32.5mm

Length: MAX 5m



LS30-TS

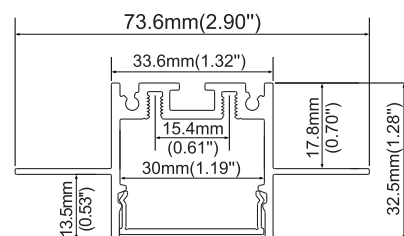

IP20



FINISH



Anod. aluminum



white



Black


ACCESSORIES



Aluminum end cap
without hole



PC frosted cover



Blind cover



Reflector: 15°, 30°, 45°



180° Connector
90° Horizontal connector
90° Vertical connector


Types of installation:




Material: Extruded aluminum

Dimension: 41.4×75mm

Length: MAX 5m

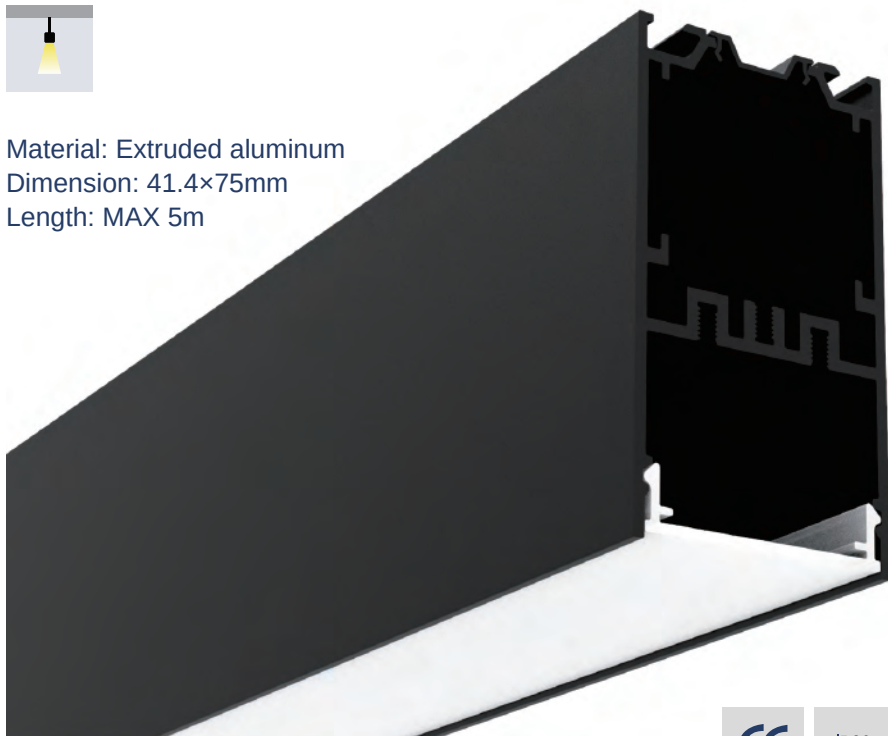

LS40

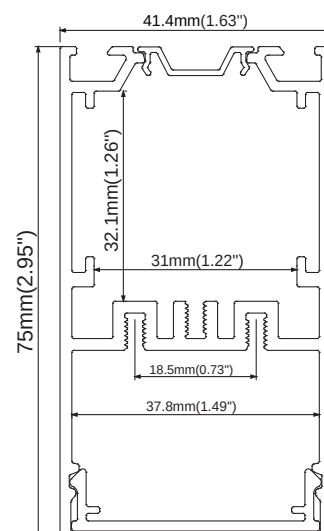

IP20



FINISH



Anod. aluminum




white




Black


ACCESSORIES




CNC end caps



PC frosted cover



Blind cover



Lens 23°/38°



Reflector 50°/70°/50x70



Outside clip



90° Vertical connector
180° Connector
90° Horizontal connector



Steel wire

LS40

Free combination




LS40-2A



LS40-2B



LS40-6A

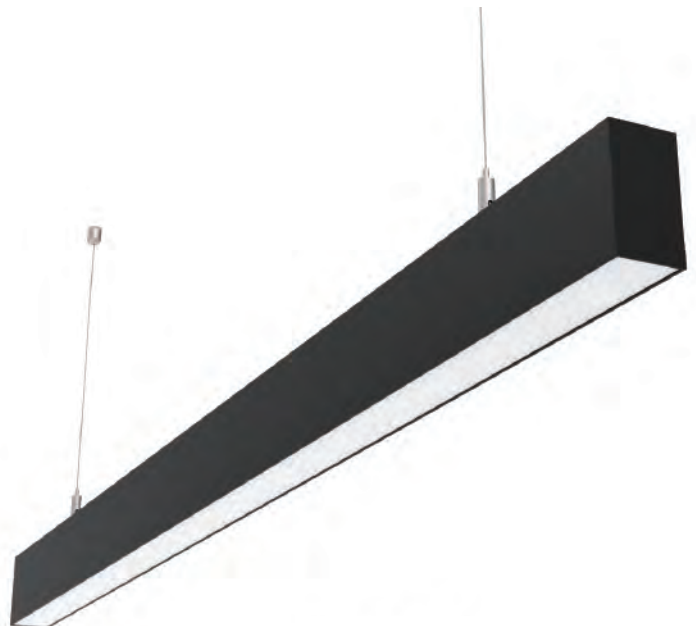

LS40-PC

Types of installation:




Material: Extruded aluminum

Dimension: 41×36mm

Length: MAX 5m



LS40-S



IP20



FINISH



Anod. aluminum



white




Black


ACCESSORIES



Aluminum end cap
without hole




PC frosted cover



Blind cover



Reflector 50°/70°/50x70

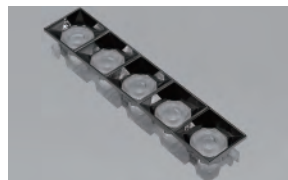

Lens 23°/38°




180° Connector
90° Vertical connector
90° Horizontal connector




Steel wire



ACCESSORIES



Aluminum end cap
without hole



Blind cover

Types of installation:



Material: Extruded aluminum
Dimension: 56.5×36mm
Length: MAX 5m



IP20



FINISH




Anod. aluminum



white




Black




PC frosted cover




Spring clip

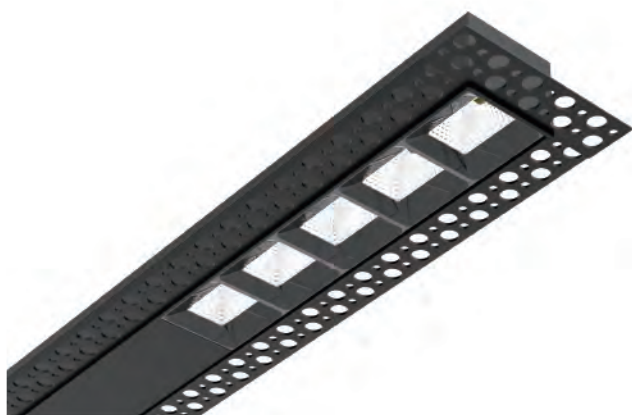

ACCESSORIES



Aluminum end cap
without hole



PC frosted cover

Types of installation:



Material: Extruded aluminum
Dimension: 81.5×36mm
Length: MAX 5m



IP20



FINISH




Anod. aluminum



white



Black

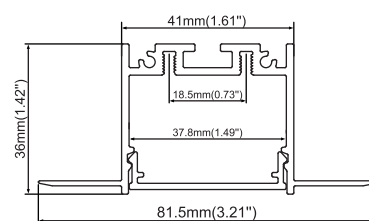

Reflector 50°/70°/50x70



Lens 23°/38°

LS40-TS

Types of installation:




Material: Extruded aluminum

Dimension: 53.8×80mm

Length: MAX 5m



LS50

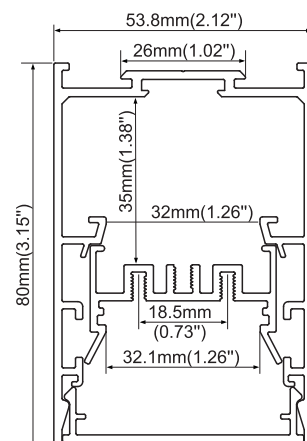

FINISH




Anod. aluminum

white

Black


ACCESSORIES



CNC end caps



PC frosted cover

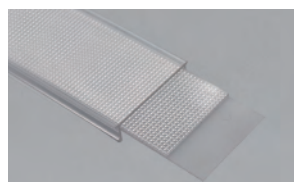


PMMA clear cover
+Prismatic film
+PC diffused film



Gear tray for wall washer



High reflective louver



Blind cover



Reflector: 15°, 30°, 45°



90° Vertical connector (bottom)
90° Horizontal connector (side)



Internal clip
Outside clip




Steel wire

LS50

Free combination



LS50-2A

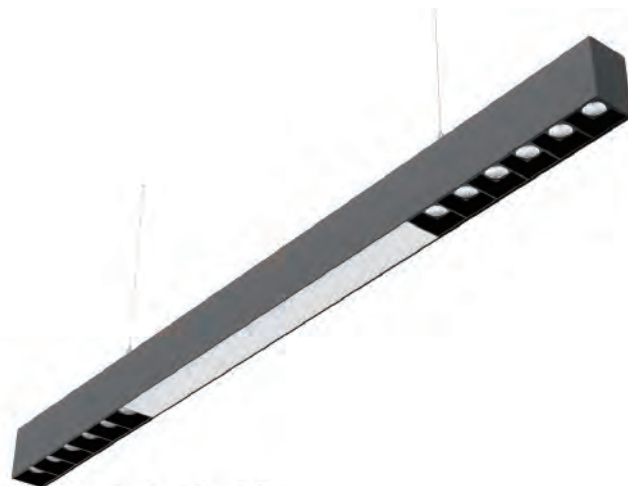


LS50-2B




LS50-4A




LS50-Wall Washer

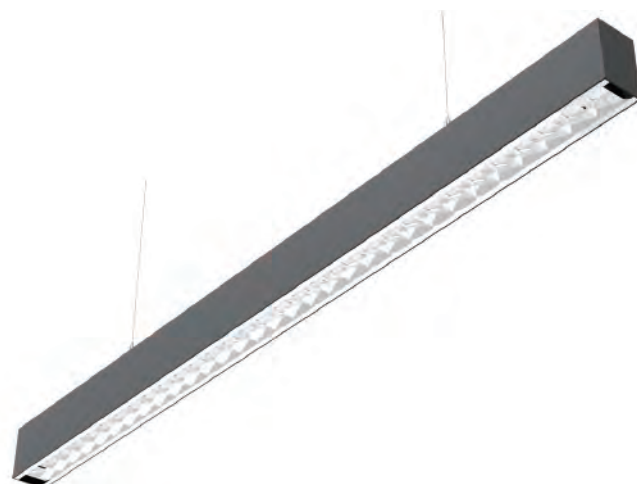


LS50-Reflective Louver

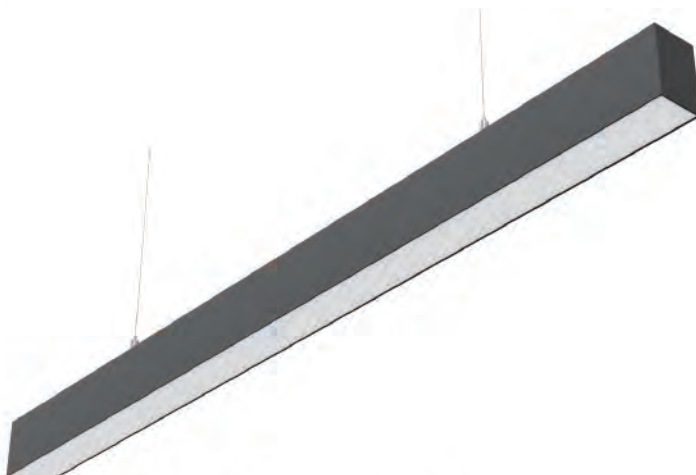

LS50-Prismatic Cover

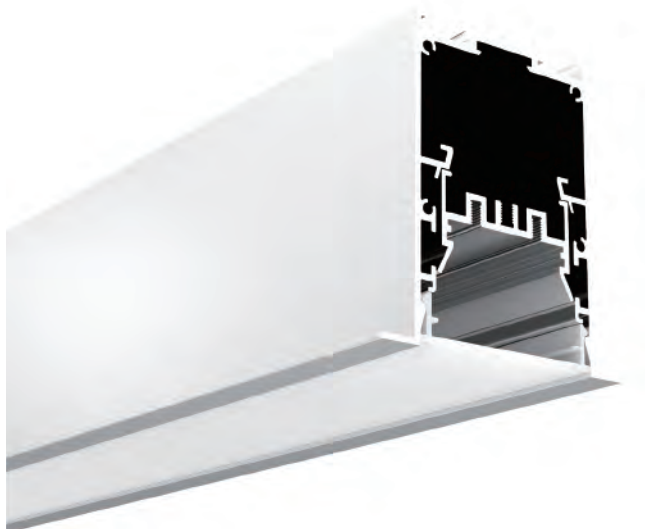


ACCESSORIES



Aluminum end cap
without hole



Internal Clip



PC frosted cover



Outside clip

All of the accessories will be the same as LS50 except for end caps and outside clip

Types of installation:



Material: Extruded aluminum

Dimension: 53.8×80mm

Length: MAX 5m



FINISH




Anod. aluminum



white




Black



ACCESSORIES



Aluminum end cap
without hole



PC frosted cover

Types of installation:



Material: Extruded aluminum

Dimension: 93.8×80mm

Length: MAX 5m



FINISH




Anod. aluminum




white



Black




All of the accessories will be the same as LS50 except for end caps

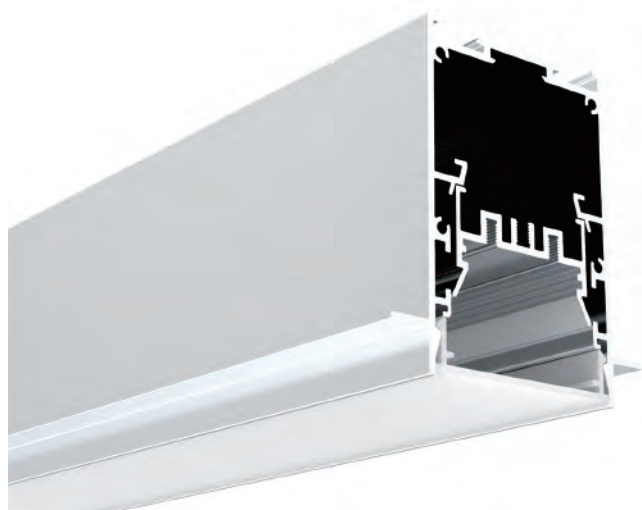

ACCESSORIES



Aluminum end cap
without hole



PC frosted cover

All of the accessories will be the same as LS50 except for end caps

Types of installation:



Material: Extruded aluminum
Dimension: 73.8×80mm
Length: MAX 5m



FINISH




Anod. aluminum




white



Black



LS50-T1

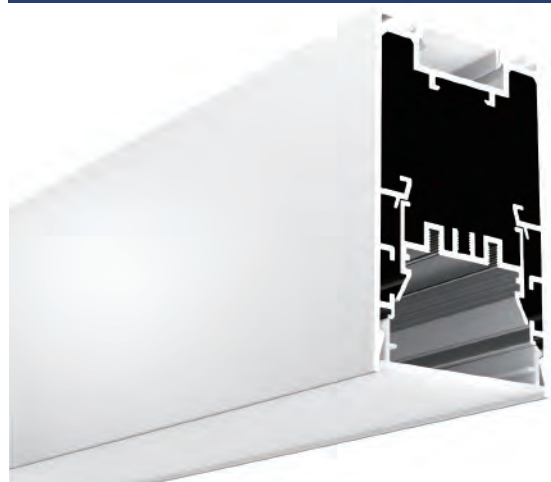


ACCESSORIES



CNC end caps



PC frosted cover
(for up light)

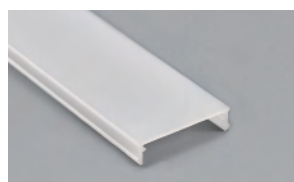

PC frosted cover
(for down light)



Steel wire
Hanging clip

All of the accessories will be the same as LS50 except for end caps and hanging clip

Types of installation:



Material: Extruded aluminum
Dimension: 53.8×90mm
Length: MAX 5m



FINISH




Anod. aluminum



white



Black

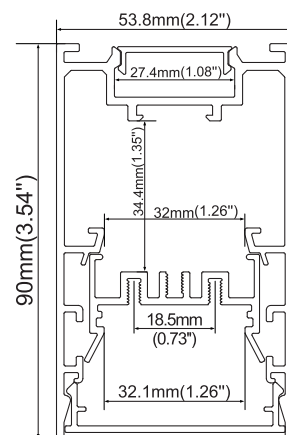

LS50-U



Types of installation:



Material: Extruded aluminum

Dimension: 53.8×80mm

Length: MAX 5m



FINISH




Anod. aluminum

white

Black

LS50-LPC

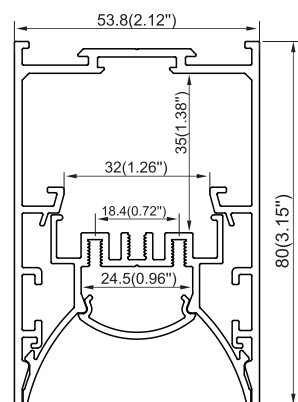


40° Lens



60° Lens



Symmetrical lens




Wall washer lens


ACCESSORIES



CNC end caps



PC diffused cover

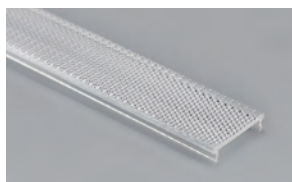


PC Prismatic cover



Wall Washer lens
(Length: 1140mm)



Internal clip
Outside clip

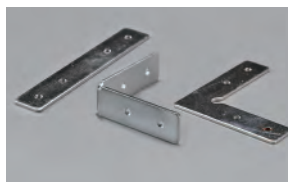


180° Connector
90° Vertical connector
90° Horizontal connector




Safety wire



Steel wire

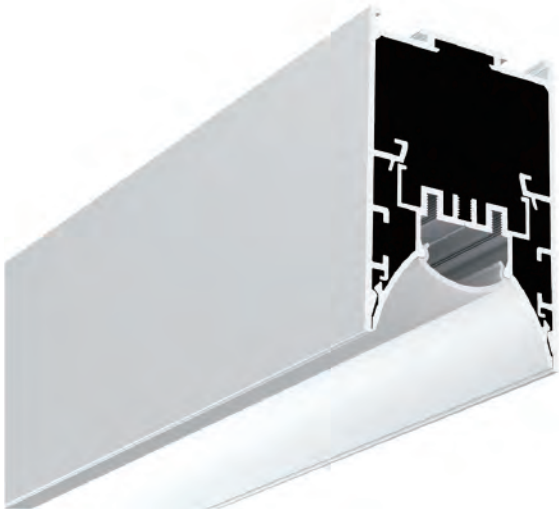


LS50-LPC

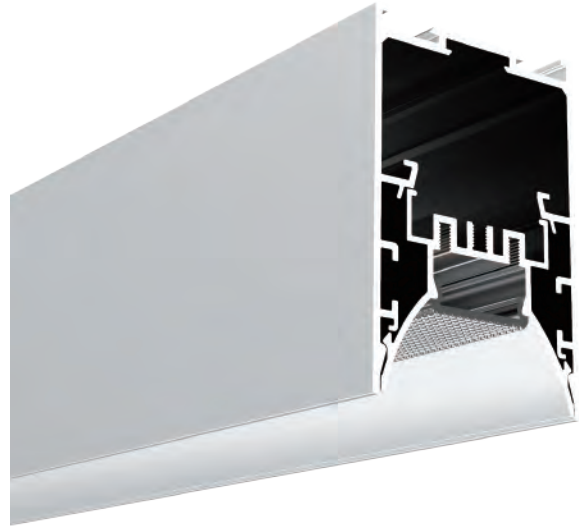


LS50-LPM




LS50-L40

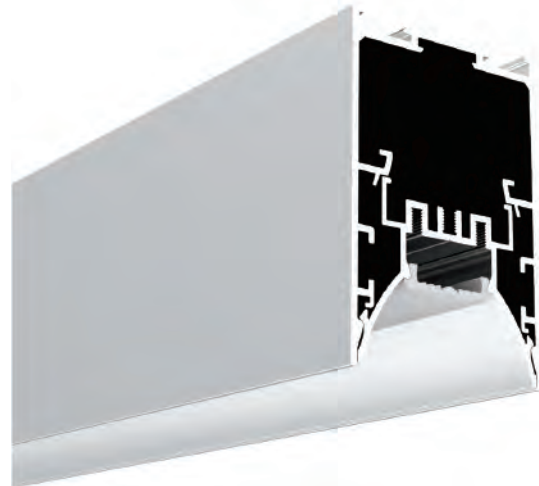

LS50-L60

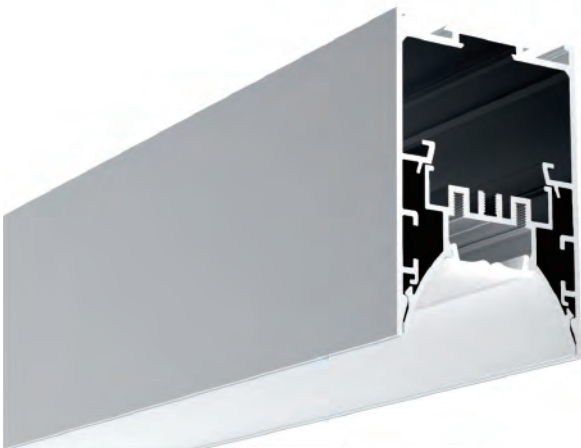

LS50-LSY

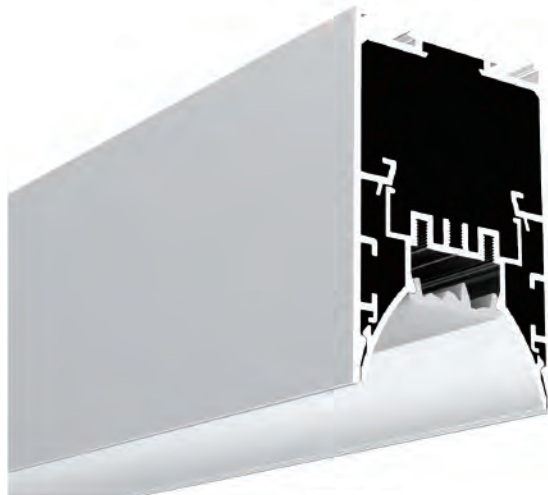

LS50-LWW

Types of installation:





Material: Extruded aluminum

Dimension: 43.9×70mm

Length: MAX 5m



ALP4070

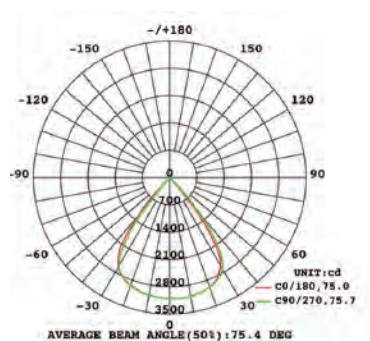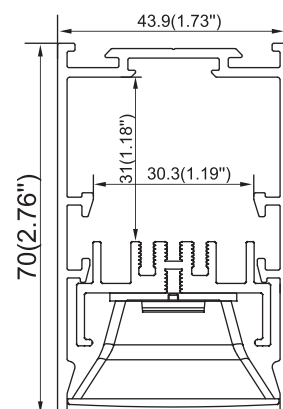

UGR values

X=4H, Y=8H S=0.2H
Radiant class 70/50/20
Transverse 13.4
Longitudinal 13.9

ACCESSORIES



CNC end caps



FINISH




Anod. aluminum

white

Black

Golden



PC frosted cover




Louver optic(7x1 or 28x1)
7X1:280mm/28x1:1140mm

LEDIL



Blind cover

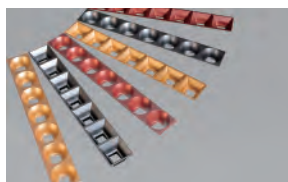

Louver
(Length: 280mm)



Safety wire



Steel wire
Internal clip
Outside clip

Types of installation:





Material: Extruded aluminum

Dimension: 43.9×75mm

Length: MAX 5m



ALP4070-UP

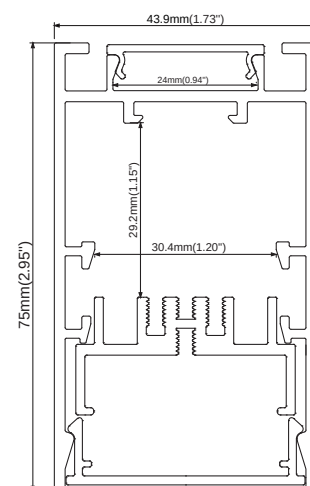


UGR values

X=4H, Y=8H S=0.2H
Radiant class 70/50/20
Transverse 13.4
Longitudinal 13.9



ACCESSORIES

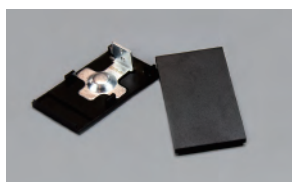

Magnet End caps

FINISH




Anod. aluminum

white

Black

Golden

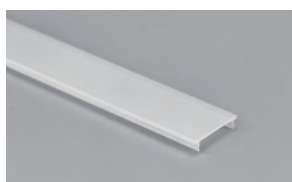


PC frosted cover
(for up light)



Louver optic(7x1 or 28x1)
7X1:280mm/28x1:1140mm

LEDIL



PC frosted cover
(for down light)



Outside clip



Safety wire



Steel wire
Internal clip


Types of installation:



Material: Extruded aluminum
Dimension: 58.9×32.8mm
Length: MAX 5m



ALP4035-T

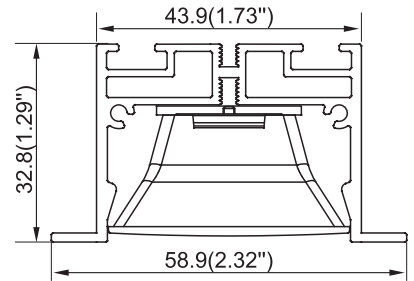

IP20



FINISH



Anod. aluminum



white




Black

ACCESSORIES



Aluminum end cap
without hole



PC frosted cover



Blind cover



Louver optic(7x1 or 28x1)
7X1:280mm/28x1:1140mm

LEDiL



Spring clip



180° Connector
90° Vertical connector
90° Horizontal connector

Types of installation:




Material: Extruded aluminum

Dimension: 46.3×60mm

Length: MAX 5m



ALP4660

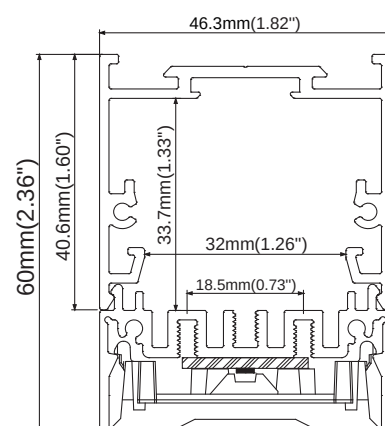

IP20



FINISH



Anod. aluminum




white




Black

ACCESSORIES



Aluminum end cap
without hole



30°/60° Lens
90°/100° Lens
Symmetrical lens
Wall washer lens
(Length: 560mm)



Steel wire
Internal clip
Outside clip



Connector L
Connector I
Connector T




Types of installation:




Material: Extruded aluminum

Dimension: 46.3×78mm

Length: MAX 5m

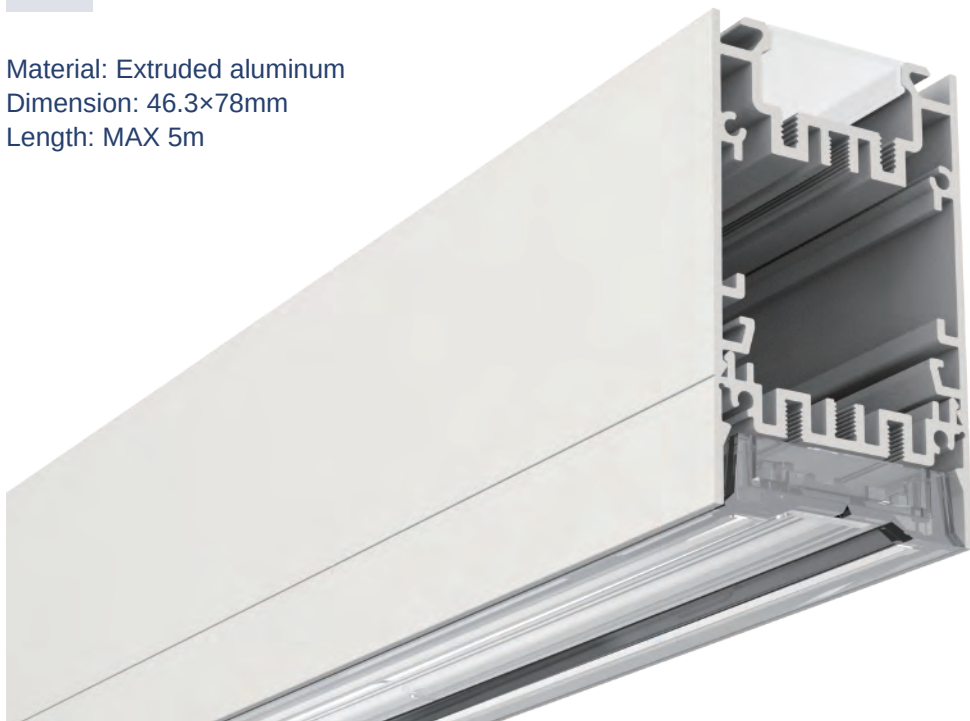

ALP4678

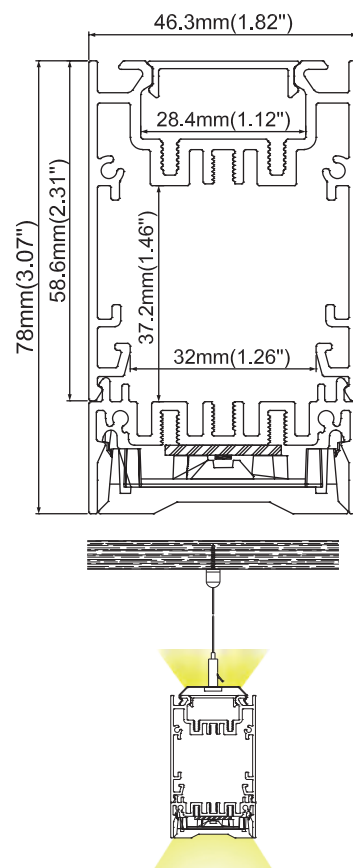

ACCESSORIES



Aluminum end cap
without hole



IP20



FINISH




Anod. aluminum



white




Black

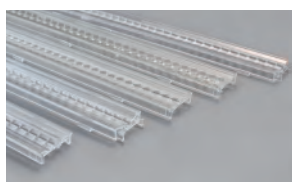


30°/60°Lens
90°/100°Lens
Symmetrical lens
Wall washer lens
(Length: 560mm)



PC frosted cover
(for up light)



Blind cover

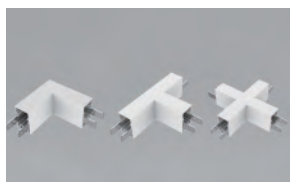

Connector L
Connector T
Connector X



Internal clip
Outside clip



Steel wire


Types of installation:




Material: Extruded aluminum

Dimension: 46.3×78mm

Length: MAX 5m

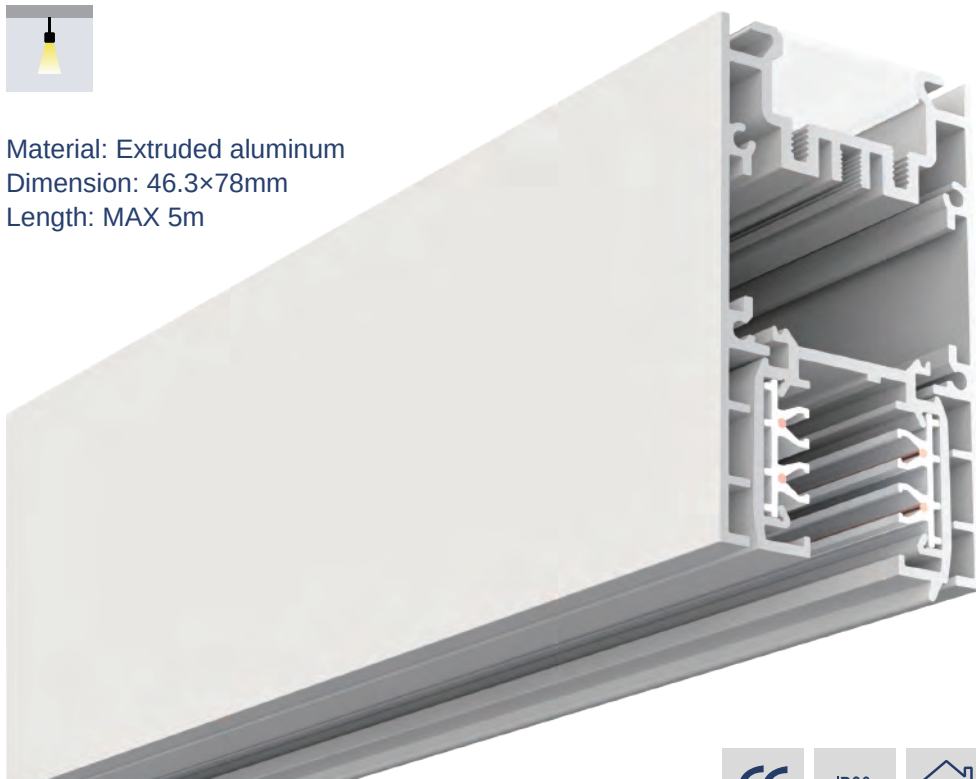

ALP4678-TK

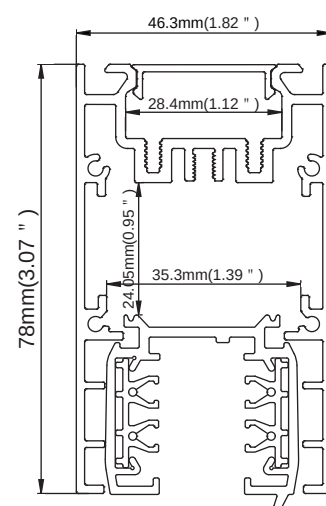

IP20



FINISH



Anod. aluminum




white




Black


ACCESSORIES



Aluminum end cap
without hole



PC frosted cover
(for up light)




Blind cover



Track



Connector L
Connector T
Connector X

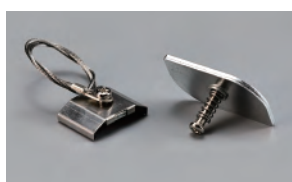

Safety wire
Mounting clip(metal)



Steel wire


Types of installation:






Material: Extruded aluminum

Dimension: 59.3×129mm


Length: MAX 5m

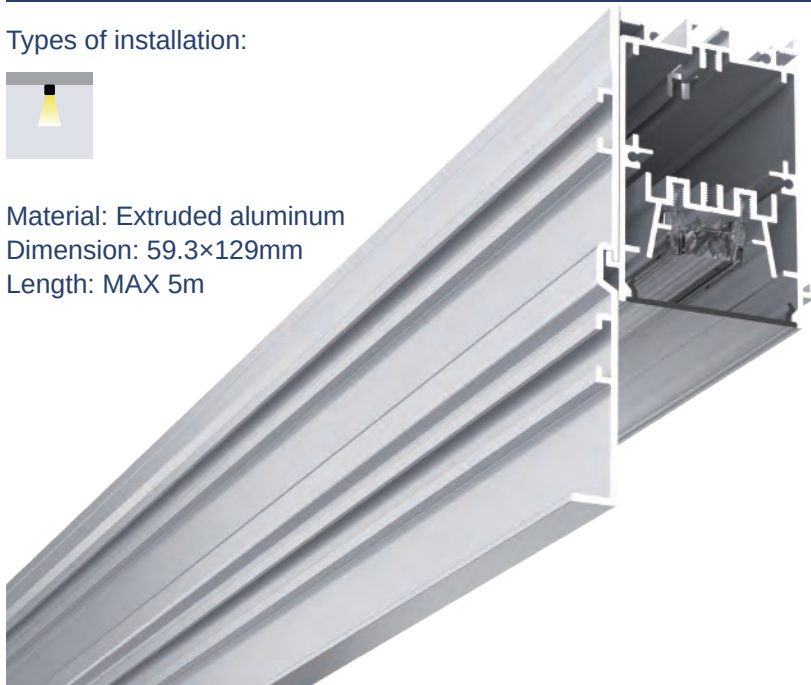

ALP5078

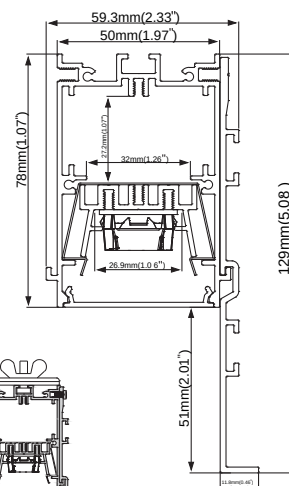

ACCESSORIES

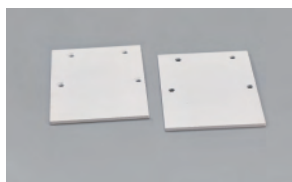

Aluminum end cap
without hole



PC clear cover



Wall grazer lens
(Length: 286mm)

LEDiL



Mounting clip(metal)



Recessed trim
Recessed trimless

FINISH



Anod. aluminum





white



Black



IP20

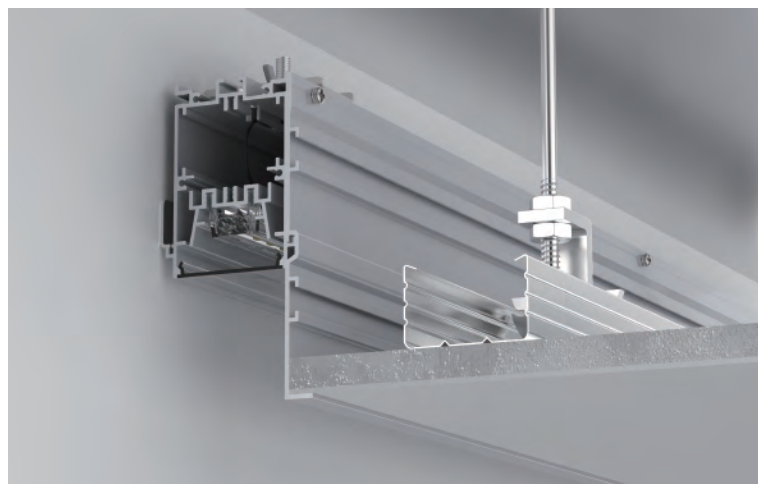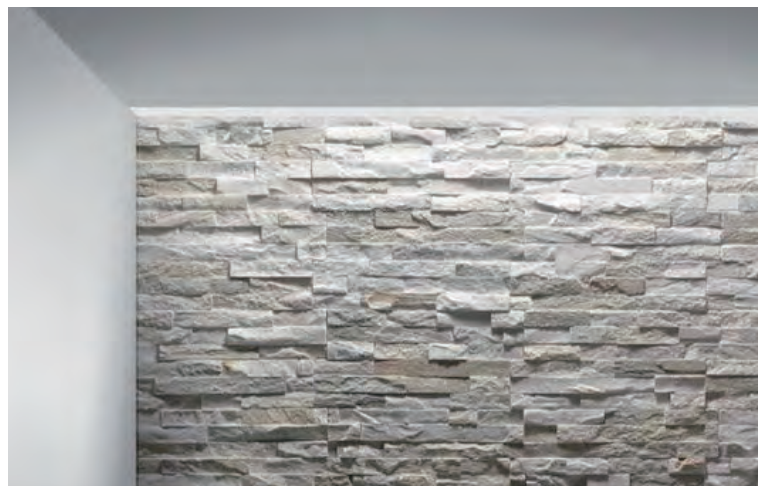

Types of installation:





Material: Extruded aluminum

Dimension: 26.7×19.5mm

Length: MAX 5m



ALP182

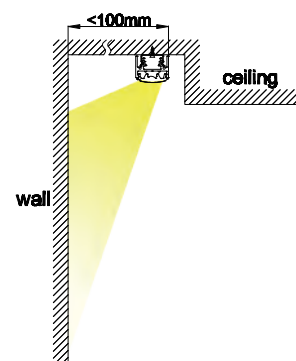

40° Lens



60° Lens



Wall washer lens



Symmetrical lens



Wall grazer lens

ACCESSORIES



Aluminum end cap
without hole



IP20



FINISH



Anod. aluminum



white



Black



Wall Washer lens
(Length: 1140mm)



Mounting clip (metal)



180° Connector
90° Vertical connector
90° Horizontal connector




ALP183



Types of installation:



Material: Extruded aluminum
Dimension: 28.3×40mm
Length: MAX 5m

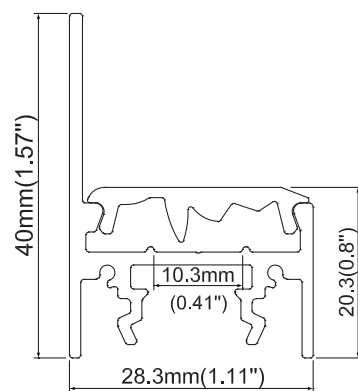

FINISH



Anod. aluminum white Black



IP20



ACCESSORIES



Aluminum end cap
without hole



Wall Washer lens
(Length: 1140mm)



Mounting clip (metal)



180° Connector
90° Vertical connector
90° Horizontal connector

Types of installation:




Material: Extruded aluminum

Dimension: 55×80mm

Length: MAX 5m



ALP5580

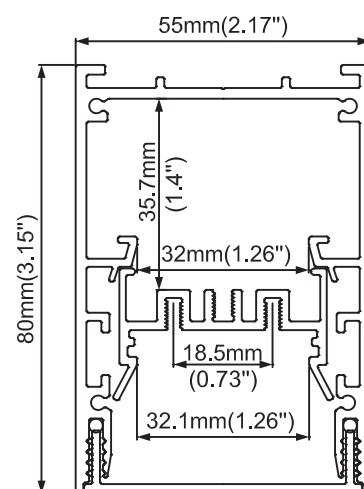

IP65



FINISH



Anod. aluminum



white



Black

ACCESSORIES



Aluminum end cap
without hole
+Silicone pad



PC frosted cover
+Silicone sealing strip



Surface mounting bracket



Hanging clip



Internal clip



Steel wire

Types of installation:




Material: Extruded aluminum

Dimension: 79×80mm

Length: MAX 5m



ALP5580-T

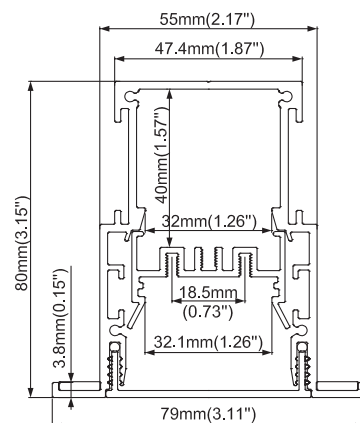

IP65



FINISH



Anod. aluminum




white



Black

ACCESSORIES



Aluminum end cap
without hole
+Silicone pad



PC frosted cover
+Silicone sealing strip



Rubber seal



Internal clip



Spring clip




Types of installation:



Material: Extruded aluminum
Dimension: $\phi 30\text{mm}$
Length: MAX 5m



T30

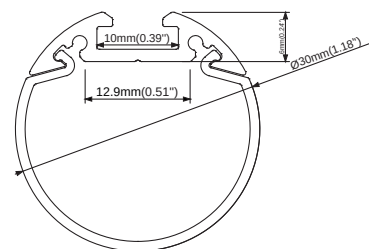

FINISH



ACCESSORIES



PC+Aluminum end cap
without hole



PC frosted cover



Mounting clip (metal)



Steel wire




Types of installation:



Material: Extruded aluminum
Dimension: $\phi 36\text{mm}$
Length: MAX 5m



T36



FINISH



Anod. aluminum



white




Black

ACCESSORIES



Aluminum end cap
with hole



PC diffused cover
Black PC frosted cover



90° Connector
180° Connector



Connector X

Types of installation:




Material: Extruded aluminum

Dimension: $\phi 40.2\text{mm}$

Length: MAX 5m



T40

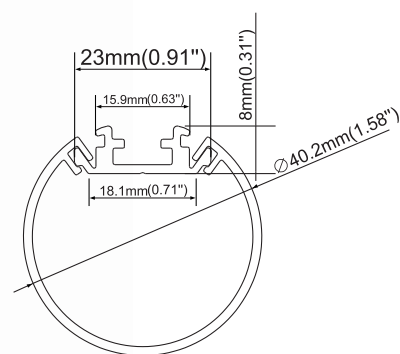

IP20



FINISH



Anod. aluminum



white



Black

ACCESSORIES



Plastic end cap
without hole



PC frosted cover



Steel wire
Mounting clip (metal)

Types of installation:




Material: Extruded aluminum

Dimension: $\phi 60\text{mm}$

Length: MAX 5m



T60

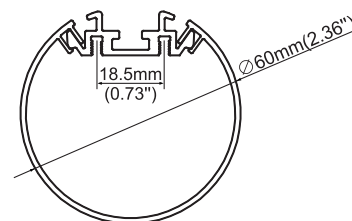


FINISH



ACCESSORIES



Plastic end cap
without hole



PC frosted cover




Steel wire
Mounting clip (metal)




Types of installation:



Material: Extruded aluminum
Dimension: $\phi 100\text{mm}$
Length: MAX 5m

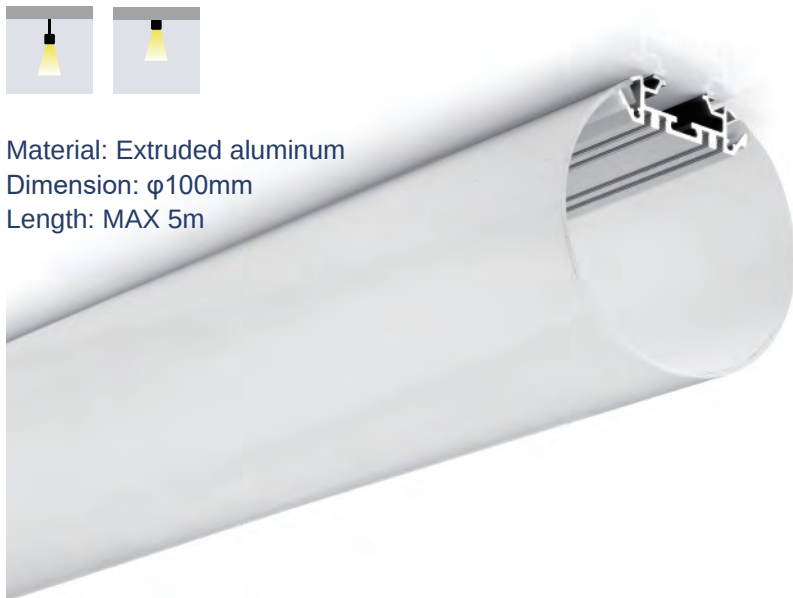


T100

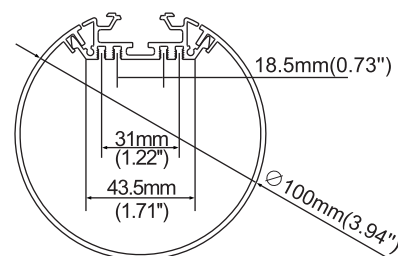

ACCESSORIES



Plastic end cap
without hole



PC frosted cover



Steel wire
Mounting clip (metal)

FINISH



Anod. aluminum

white

Black



IP20



Types of installation:




Material: Extruded aluminum

Dimension: 16×28mm

Length: MAX 5m

ALP1628

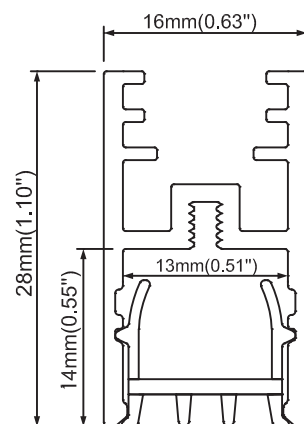

FINISH




Black

ACCESSORIES




Plastic end cap
without hole

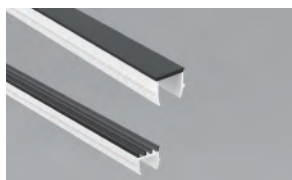

Black cover
Low glare control black cover
(co-extrusion)



PC frosted cover
Prismatic cover
Low glare control white cover
(co-extrusion)




Blind cover




Connector
Wall mounting bracket




Steel wire
Hanging bracket

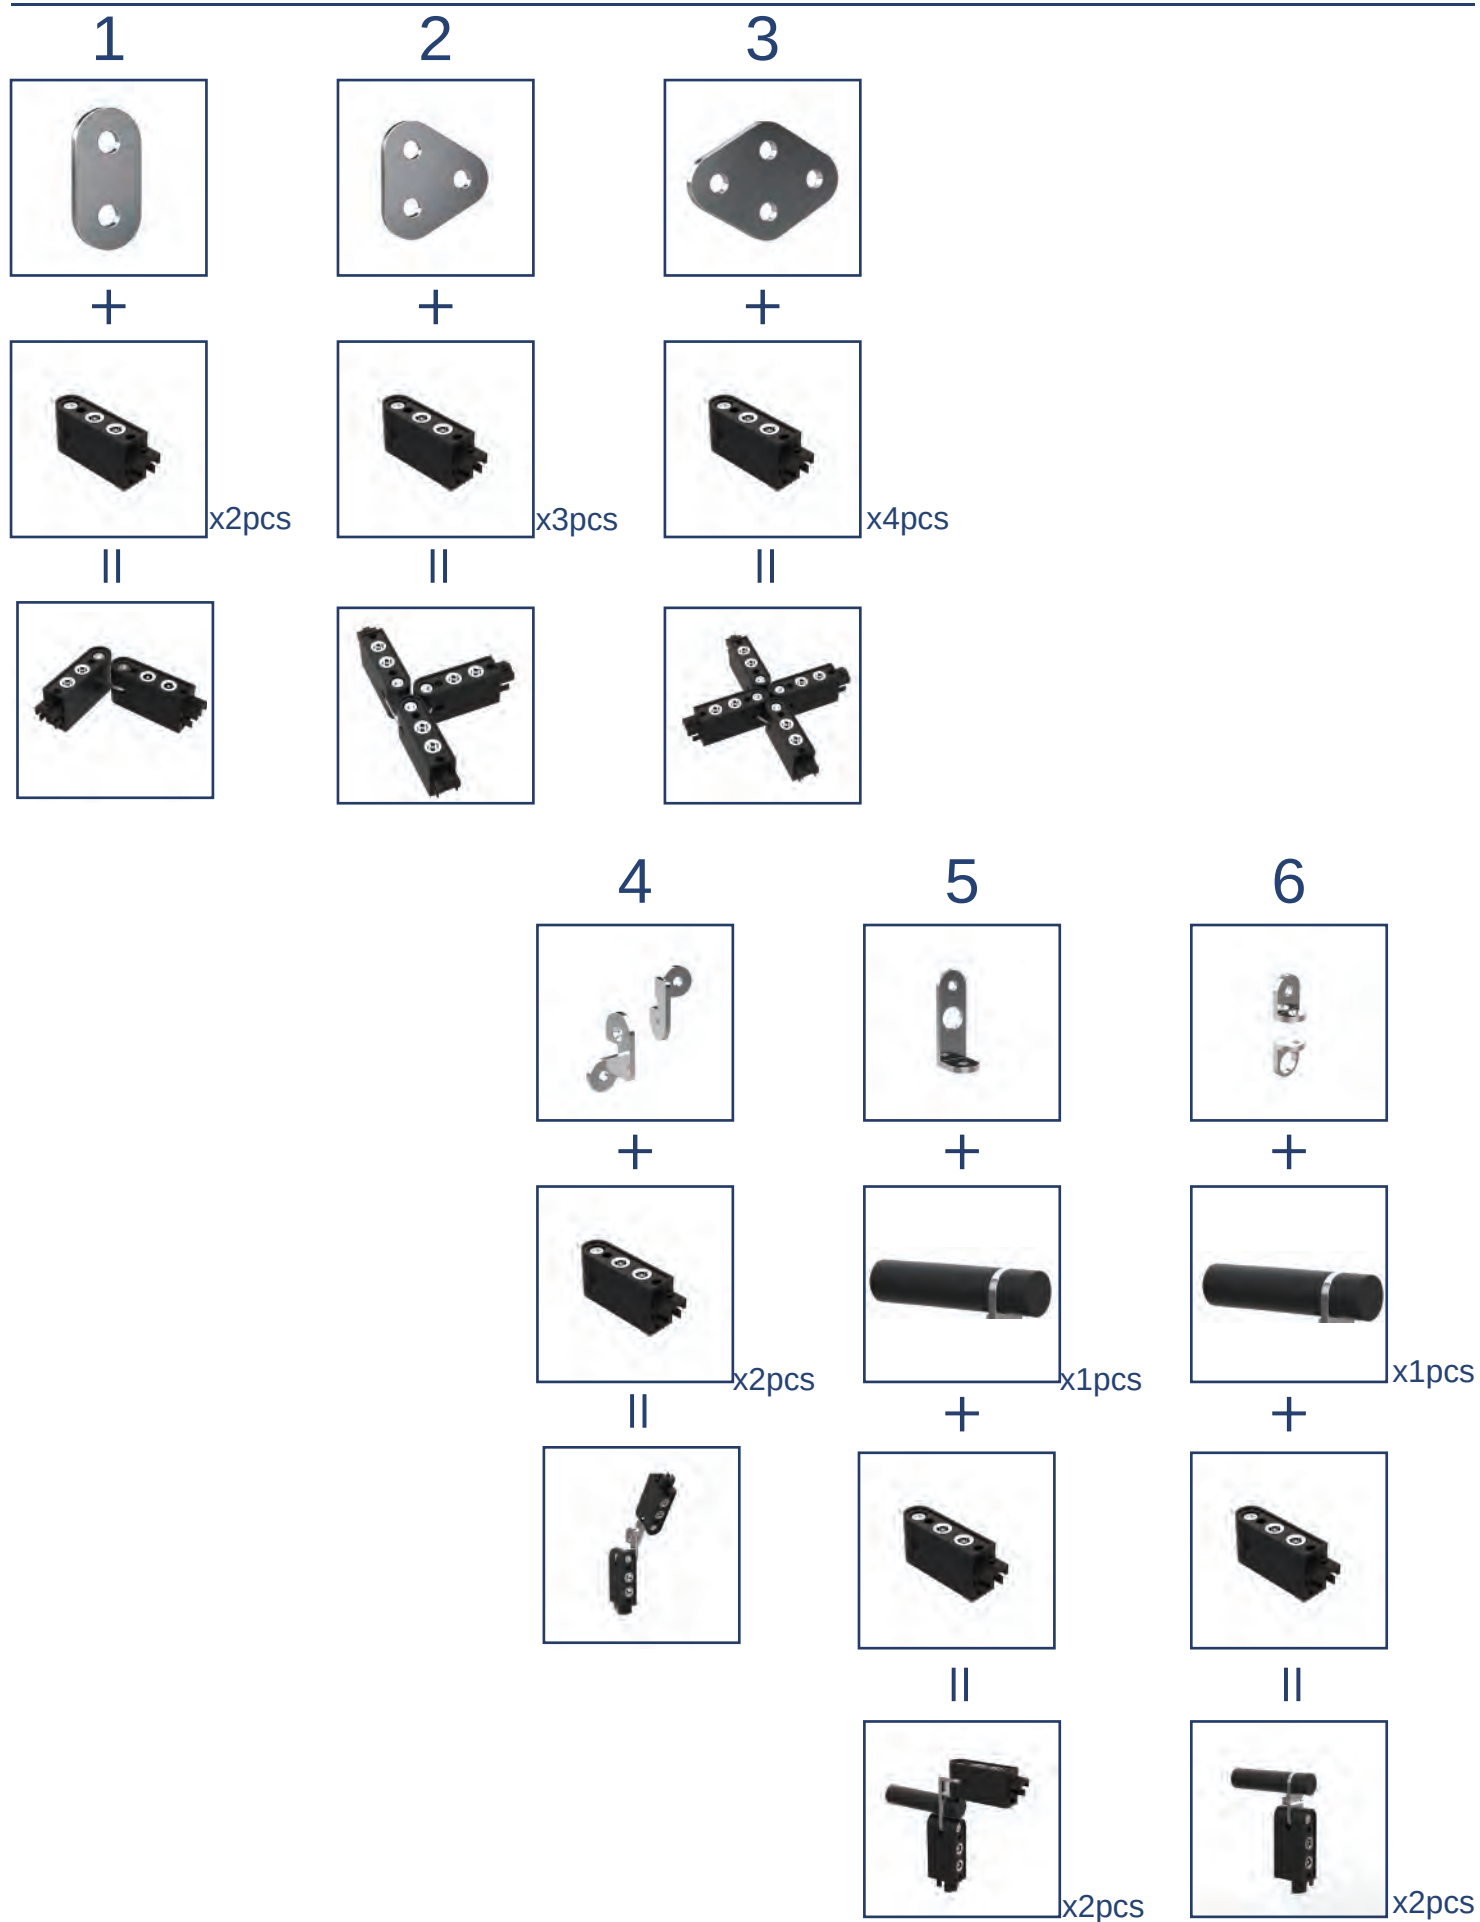

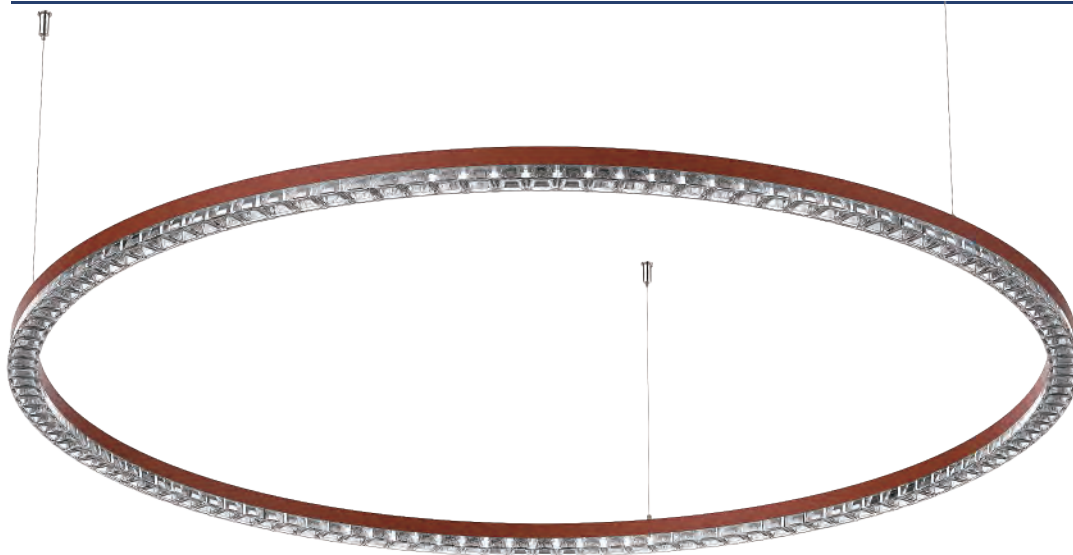

ALP2617C



Types of installation:




Material: Extruded aluminum
Dimension: 30×31.14mm
Calibre: Φ460mm/Φ650mm/Φ1050mm/Φ1250mm



Anti-glare

No Flicker

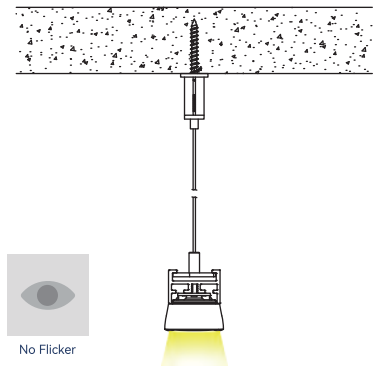

ACCESSORIES



Lens (UGR<19)





LED module



Hanging bracket



Steel wire

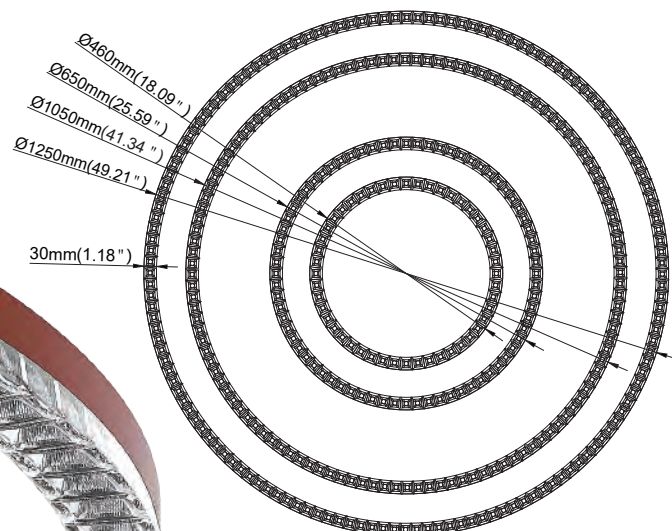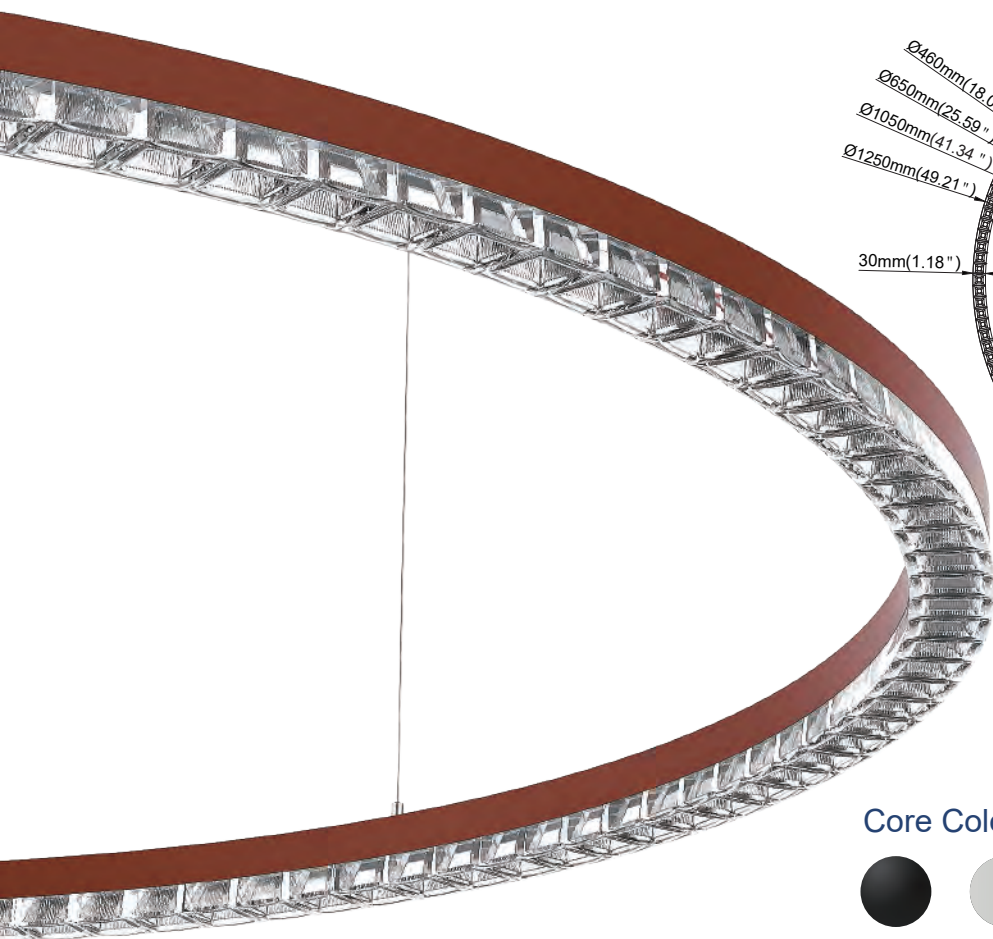

$\Phi 460\text{mm}$:28W/2600lm
 $\Phi 650\text{mm}$:40W/3700lm
 $\Phi 1050\text{mm}$:64W/5950lm
 $\Phi 1250\text{mm}$:78W/7254lm

Core Colours



Black

White

Creative Colours



Terra Red


Blue

Green





ALP14C

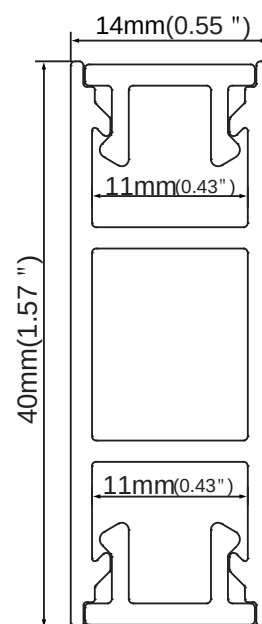

Types of installation:




Material: Extruded aluminum

Dimension: 14×40mm


Calibre: Φ600mm/Φ900mm/Φ1200mm




Size



Φ600mm:45W/2250lm




Φ900mm:68W/3400lm

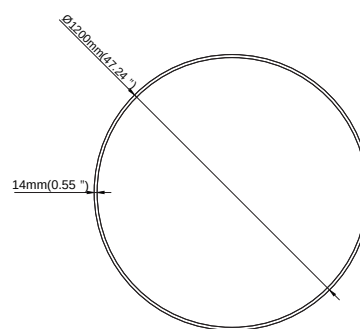

Φ1200mm:92W/4600lm


Core Colours



Black

White

Creative Colours



Terra Red

Blue

Green

ACCESSORIES



PMMA frosted cover




Hanging bracket




Steel wire



LED strip

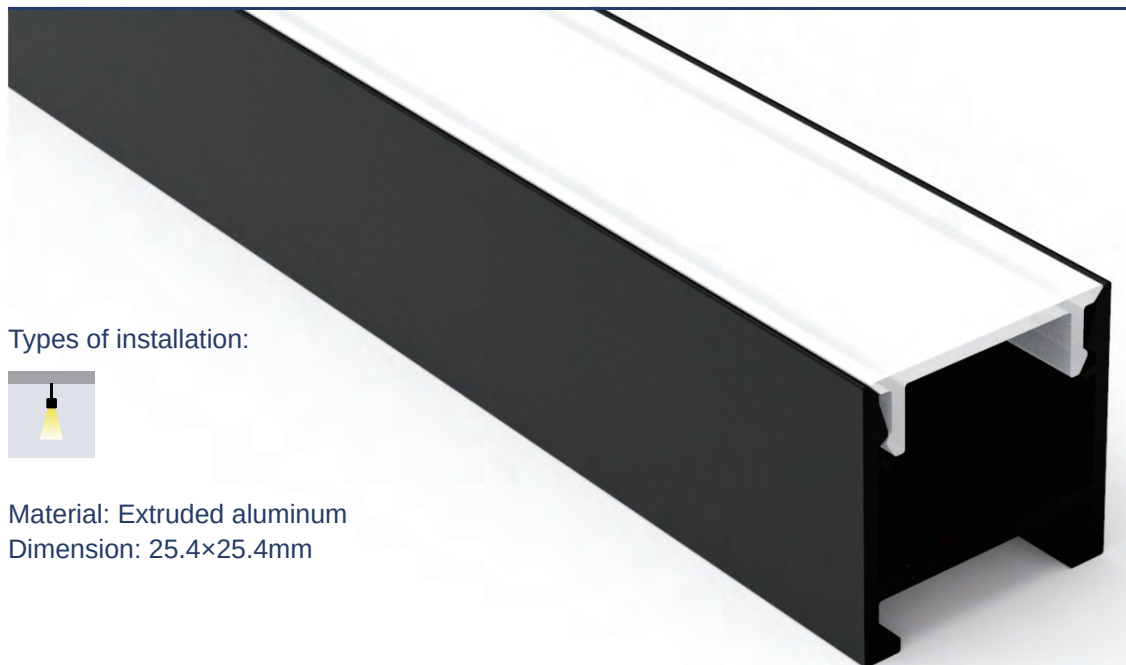




ALP25C-R



Types of installation:



Material: Extruded aluminum
Dimension: 25.4×25.4mm

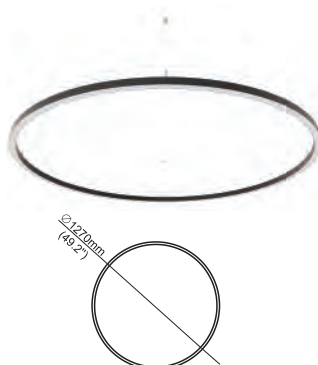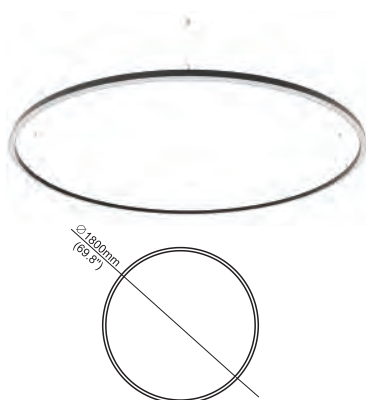

ACCESSORIES



CNC end caps



PMMA frosted cover



Connetor



Slider hanging bracket




Steel wire

FINISH



Anod. aluminum white Black




ALP3050C

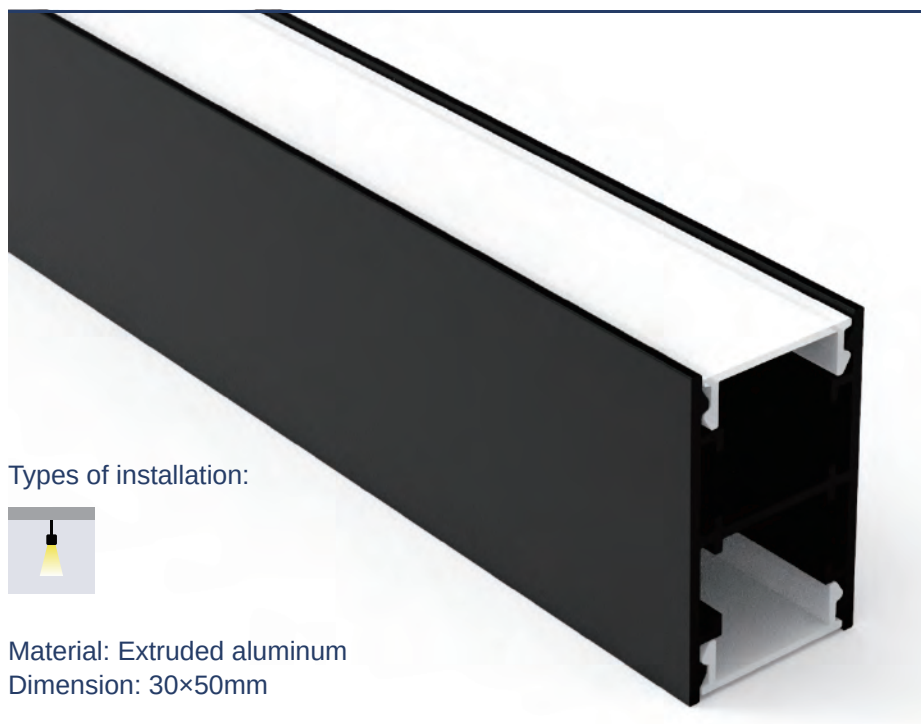

Types of installation:



Material: Extruded aluminum
Dimension: 30×50mm

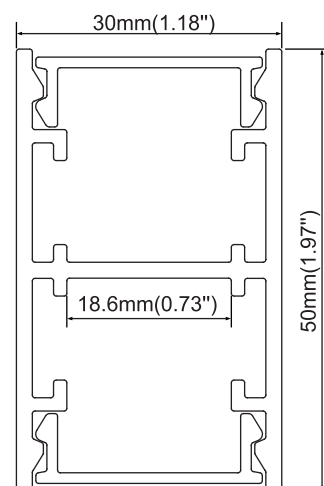

ACCESSORIES



CNC end caps



PMMA frosted cover



Connetor



IP20



FINISH



Anod. aluminum



white



Black







Hanging bracket



Steel wire


ALP30C

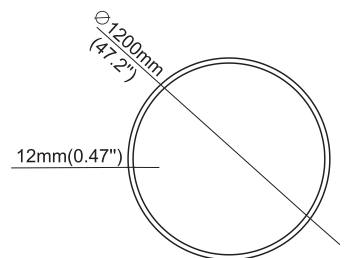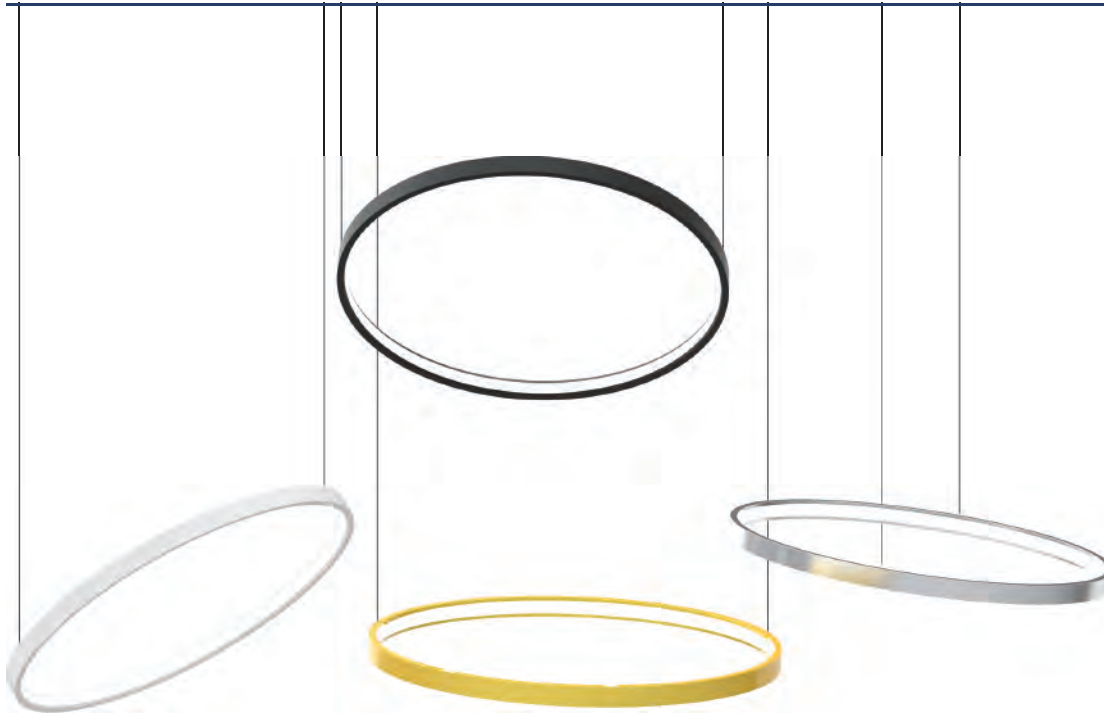

Types of installation:



Material: Extruded aluminum
Dimension: 12×30mm

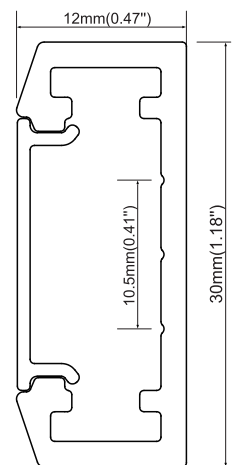

IP20



ACCESSORIES







PC diffused cover



Steel wire


ALP30CO

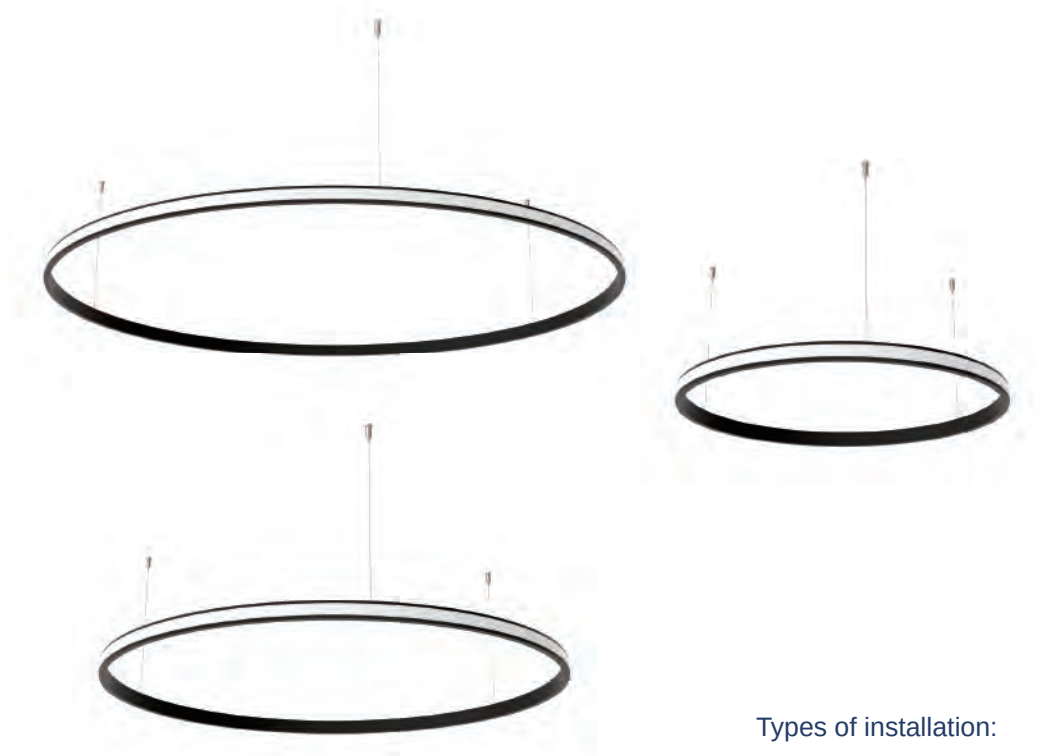

Types of installation:



Material: Extruded aluminum
Dimension: 12×30mm

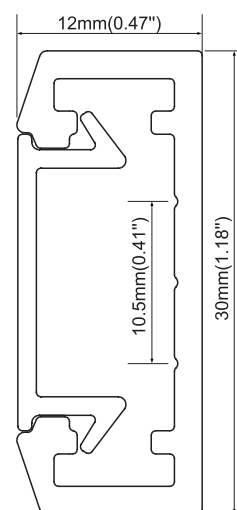

ACCESSORIES



PC diffused cover



Steel wire




Types of installation:




Material: Extruded aluminum
Dimension: 53.6×60.4mm



ALP50C

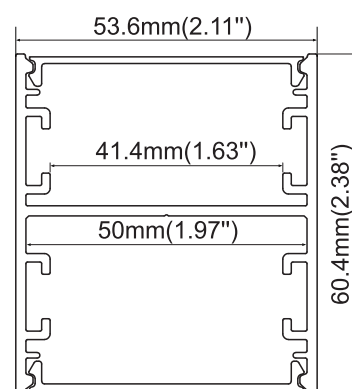

ACCESSORIES



CNC end caps



IP20



FINISH



Anod. aluminum



white



Black



PMMA frosted cover



Hanging bracket



Connetor




Steel wire




Size

RAL410:27W/2700lm




RAL605:47W/5170lm




Round aluminum lighting


RAL910:89W/11950lm

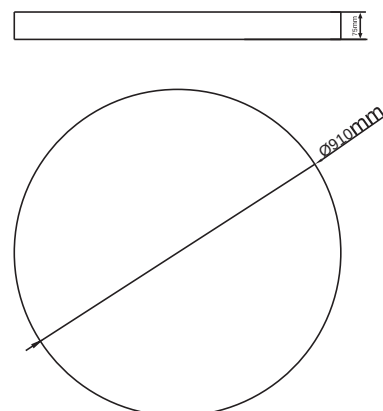


Acoustic Material Color Options



Cover



PC diffused cover



prismatic cover

Types of installation:



ACCESSORIES



Canopy



Ceiling mounting
bracket




Steel wire



ACCESSORIES



Silicone end cap
with hole/without hole

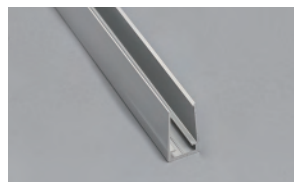

Aluminum mounting profile

Types of installation:



Material: Silicone Co-extrusion
Dimension: 10.4×18mm

Length: MAX 50m


- 10mm PCB
- 14W at maximum



IP65



S1018-S



Bendable profile for mounting




Mounting clip (aluminum)



ACCESSORIES



Silicone end cap
with hole/without hole



Aluminum mounting profile

Types of installation:



Material: Silicone Co-extrusion
Dimension: 16×16mm

Length: MAX 50m


- 10mm PCB
- 14W at maximum



IP65



S1616-T



Bendable profile for mounting



Mounting clip (aluminum)



Types of installation:



Material: Silicone Co-extrusion

Dimension: 16×16mm

Length: MAX 50m


- 10mm PCB
- 14W at maximum



IP65



S1616-S




ACCESSORIES



Silicone end cap
with hole/without hole



Bendable profile for mounting



Aluminum mounting profile



Mounting clip (aluminum)



Types of installation:



Material: Silicone Co-extrusion

Dimension: 16×16mm

Length: MAX 50m


- 10mm PCB
- 14W at maximum



IP65



S1616-C




ACCESSORIES



Silicone end cap
with hole/without hole



Mounting clip(metal)

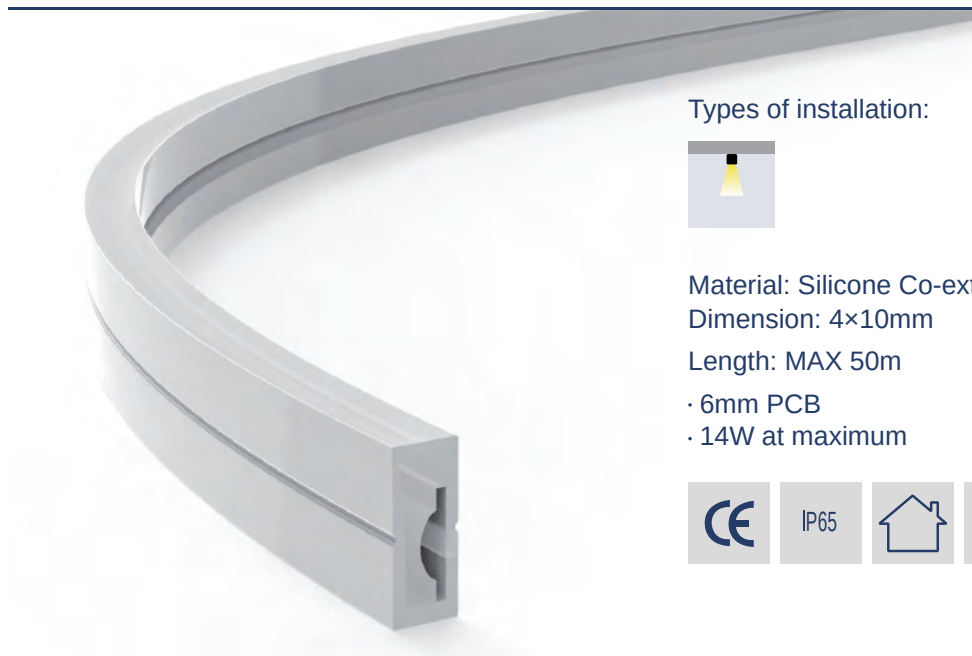

Types of installation:



Material: Silicone Co-extrusion


Dimension: 4×10mm

Length: MAX 50m

- 6mm PCB
- 14W at maximum



S0410-S



ACCESSORIES



Silicone end cap
with hole/without hole



Mounting clip (aluminum)



Types of installation:



Material: Silicone Co-extrusion


Dimension: 6×12mm

Length: MAX 50m

- 8mm PCB
- 14W at maximum



S0612-S

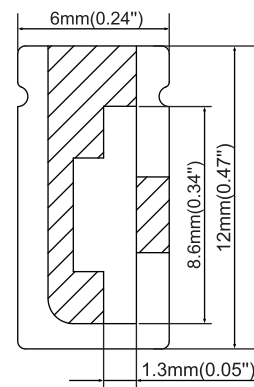

ACCESSORIES



Silicone end cap
with hole/without hole



Mounting clip (aluminum)




Types of installation:



Material: Silicone Co-extrusion
Dimension: 10×10mm
Length: MAX 50m
· 6mm PCB
· 14W at maximum

S1010-T



IP65



ACCESSORIES



Silicone end cap
with hole/without hole



Mounting clip (aluminum)




Types of installation:



Material: Silicone Co-extrusion
Dimension: 30×21.5mm
Length: MAX 50m
· 15mm PCB
· 14W at maximum

S3021-T



IP65



ACCESSORIES




Silicone end cap
with hole/without hole



Mounting clip (metal)



S1616-3D

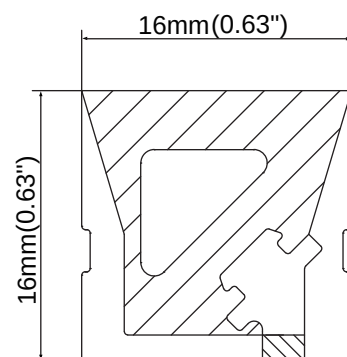

Features

- Top bend and side bend, allowing any shape and conceive creative designs
- Outdoor rated luminaire, IP67, with flexible bending possibilities
- 7W/m, 310lm/m, 24V
- 3 years warranty, life span over 36000 hours



IP65



Bendable stainless steel clamping groove


ACCESSORIES





Silicone end cap
with hole/without hole



Mounting clip (aluminum)

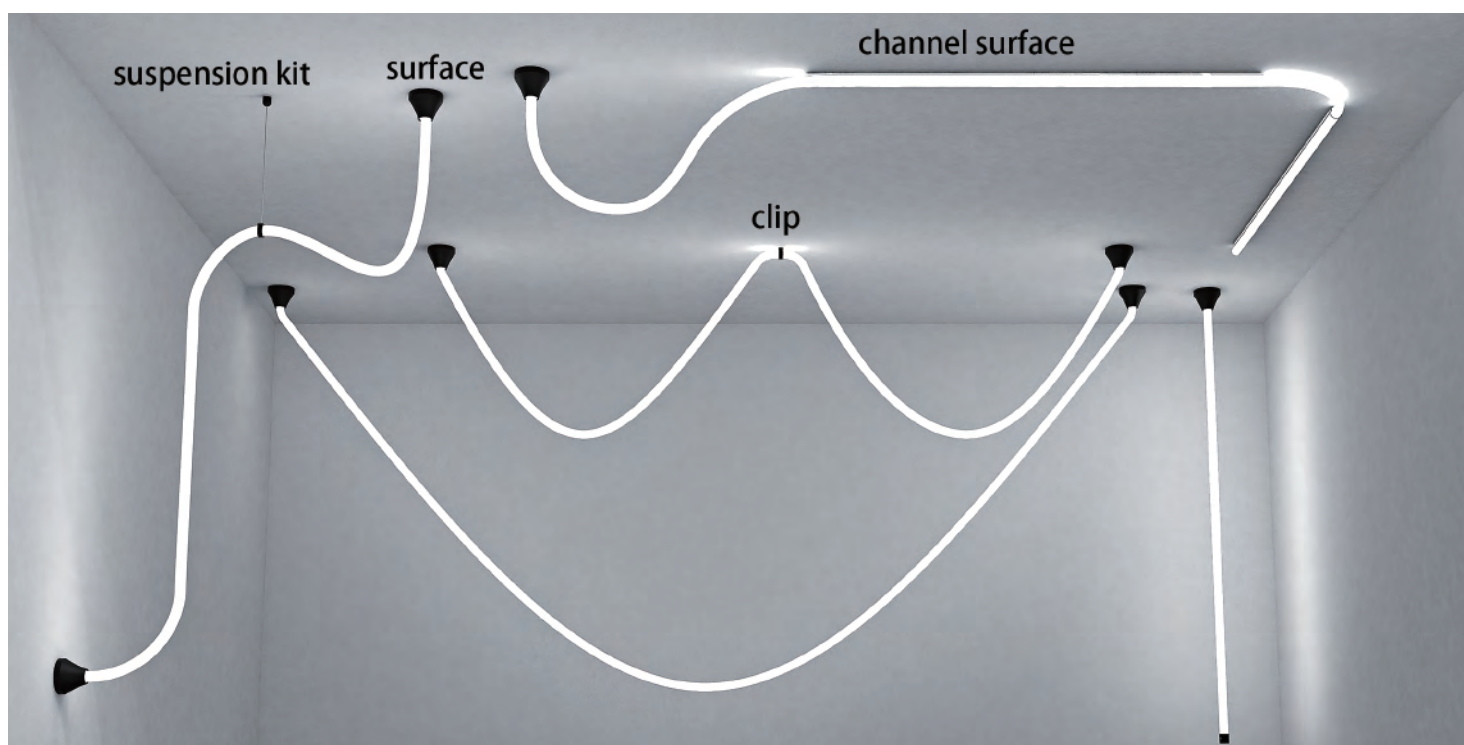

S18



Features

- Made of highly flexible silicone, 360° light emission, matt surface
- Free cutting, minimum cutting distance of 5mm
- Choice of 2 color temperatures (3000K/4000K)
- 14w/m, 850Lm/W, in door use, 24V



IP65



ACCESSORIES



Ceiling bracket



Short PC clip
CNC end cap for hanging installation
Suspension ring
Silicone end caps





Surface mounting PC channel



Steel wire

S20

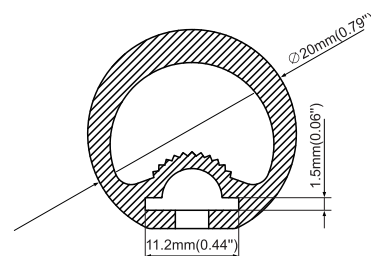

Types of installation:



Material: Silicone Co-extrusion

Dimension: $\varnothing 20\text{mm}$

Length: MAX 5m



IP65



ACCESSORIES




Silicone end cap
with hole/without hole



Clip




ALP1202



Aluminum board for heat dissipation
12x2mm
about 14W/M




ALP2002

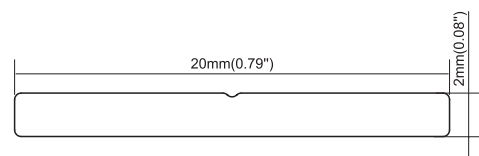

Aluminum board for heat dissipation
20x2mm
about 20W/M



ALP2502

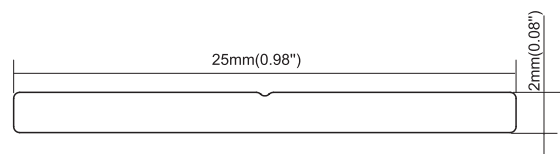


Aluminum board for heat dissipation
25x2mm
about 30W/M




RDB01

Round driver box for circles

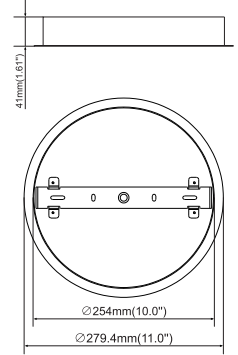


RDB02

Round driver box for circles





RDB03

Round driver box for circles



Canopy

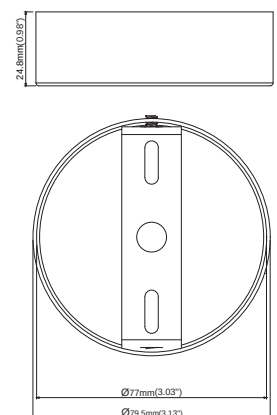

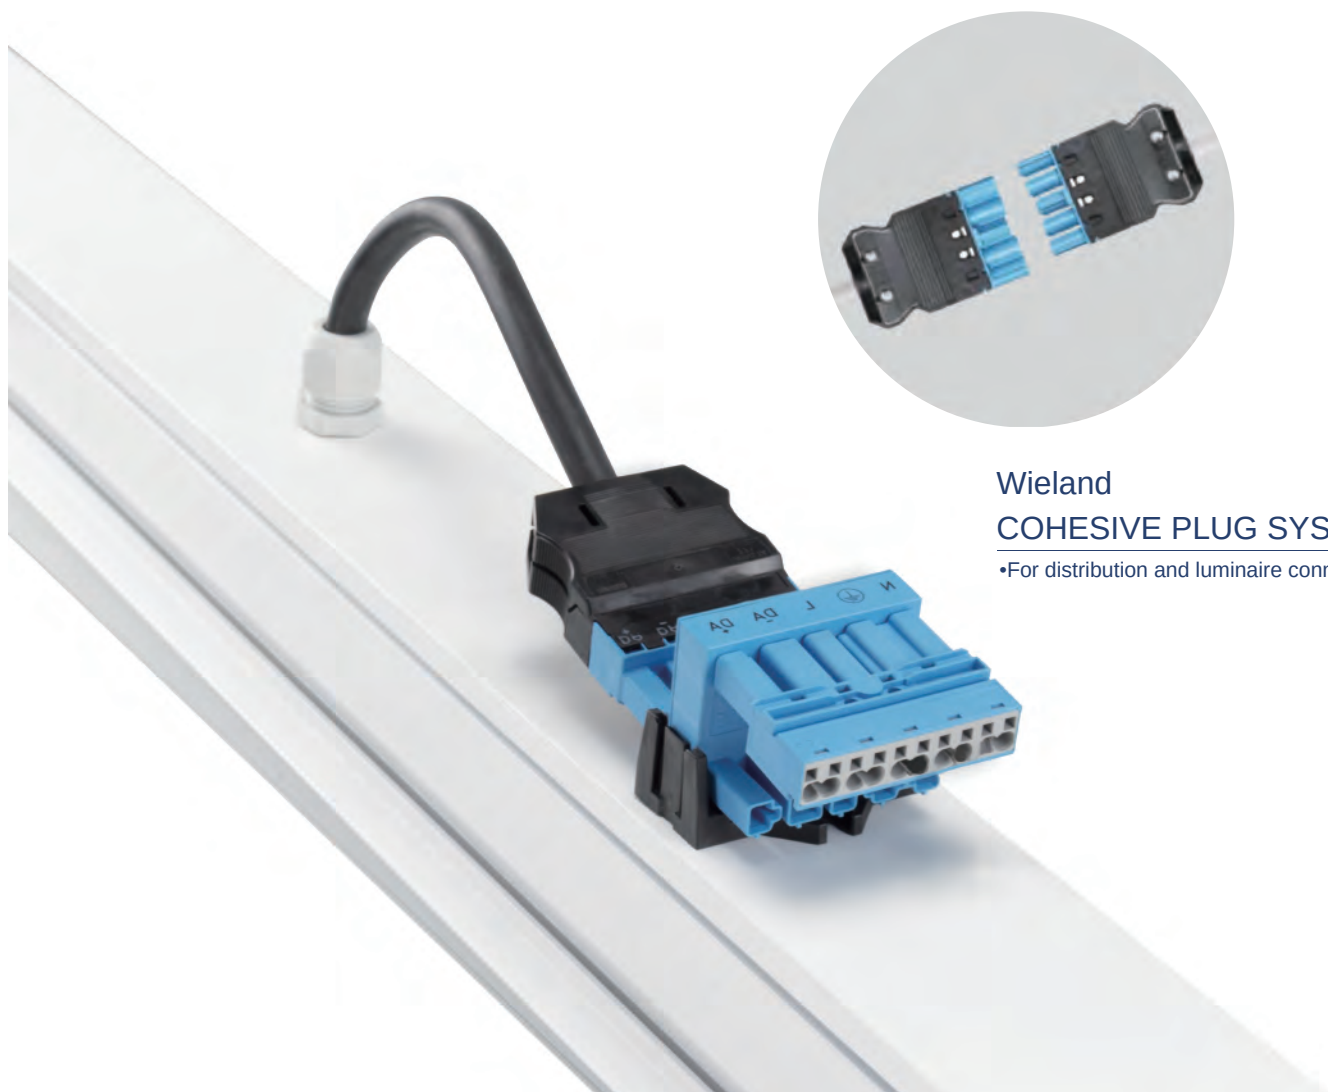

Wieland COHESIVE PLUG SYSTEM

•For distribution and luminaire connection

APPLICATIONS

The electrical connection of luminaires usually calls for the time-consuming method of opening the luminaire, dismantling and stripping the power supply and control cable, and, if applicable, inserting the illuminants on site. With pluggable pre-assembled luminaires, the effort required for on-site assembly can be reduced quite considerably.

SOLUTIONS

- Industrially pre-assembled components.
- Easy to plug together on site.
- For mains application (3-pole) and DALI application (5-pole).
- Flexibility to the point in time of luminaire assembly: conventional connection or pluggable

ADVANTAGES

- Fast, easy, and safe installation.
- Standardized interfaces for fast replacement.
- High functional reliability through prevention of mismating.
- Simple adjustment of the installation to local conditions

LED Module For ALP25C Series

	For ALP25C-600	For ALP25C -900	For ALP25C -1270	For ALP25C -1800
				
Connection type	1/4 circle joining together	1/8 circle joining together	1/8 circle joining together	1/8 circle joining together
Power(W)	7.2W	5.4W	7.2W	10.8W
Input Voltage(V)	36V	36V	36V	36V
Input Current(mA)	200mA	150mA	200mA	300mA
Light Output	1008lm	756lm	1008lm	1512lm
Color Temperature	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k
CRI	80+/90+	80+/90+	80+/90+	80+/90+
LED Type	2835 SMD LED	2835 SMD LED	2835 SMD LED	2835 SMD LED
LED Brand	Samsung/Osram	Samsung/Osram	Samsung/Osram	Samsung/Osram


LED Module For ALP50C Series

	For ALP50C -900	For ALP50C -1270	For ALP50C -1800
			
Connection type	1/8 circle joining together	1/8 circle joining together	1/8 circle joining together
Power(W)	5.4W	8.1W	10.8W
Input Voltage(V)	36V	36V	36V
Input Current(mA)	150mA	225mA	300mA
Light Output	756lm	1134lm	1512lm
Color Temperature	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k
CRI	80+/90+	80+/90+	80+/90+
LED Type	2835 SMD LED	2835 SMD LED	2835 SMD LED
LED Brand	Samsung/Osram	Samsung/Osram	Samsung/Osram

LED Module For ALP3050C Series

	For ALP3050C -600	For ALP3050C -900	For ALP3050C -1200	For ALP3050C -1800
				
Connection type	1/4 circle joining together	1/8 circle joining together	1/8 circle joining together	1/8 circle joining together
Power(W)	7.2W	5.4W	7.2W	10.8W
Input Voltage(V)	36V	36V	36V	36V
Input Current(mA)	200mA	150mA	200mA	300mA
Light Output	1008lm	756lm	1008lm	1512lm
Color Temperature	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k
CRI	80+/90+	80+/90+	80+/90+	80+/90+
LED Type	2835 SMD LED	2835 SMD LED	2835 SMD LED	2835 SMD LED
LED Brand	Samsung/Osram	Samsung/Osram	Samsung/Osram	Samsung/Osram

	LM2835R10012P30	LM2835R9952P30	LM5630R11852P40
			
Size(mm)	1000×12×5	995×24×6	1185×24×6
Power(W)	30W	30W	40W
Input Voltage(V)	30V	30V	27V
Input Current(mA)	1.0A	1.0A	1.5A
Light Output	4200lm	4200lm	5600lm
Color Temperature	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k
CRI	80+/90+	80+/90+	80+/90+
LED Type	2835 SMD LED	2835 SMD LED	5630 SMD LED
LED Brand	Samsung/Osram	Samsung/Osram	Samsung/Osram

	For LS30 series	For LS40 series	For LS50 series
	LM3030LS30P6 	LM3030LS40P9 	LM3030LS50P14W 
Size (mm)	132.5X20X6mm	190X30X6	285X31X6mm
Power(W)	6W	9W	14W
Input Voltage(V)	15V	15V	18V
Input Current(mA)	0.4A	0.6A	0.8A
Light Output	660lm	990lm	1260lm
Color Temperature	3000K/4000k	3000K/4000k	3000K/4000k
CRI	80+/90+	80+/90+	80+/90+
LED Type	3030 SMD LED	3030 SMD LED	3030 SMD LED
LED Brand	Osram	Osram	Osram

LED Module: For ALP4070/ALP4070-UP

		
Size (mm)	280X30X6	1140X30X6
Power(W)	7.2W	29W
Input Voltage(V)	42V	42V
Input Current(mA)	0.175A	0.7A
Light Output	1000lm	4060lm
Color Temperature	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k
CRI	80+/90+	80+/90+
LED Type	2835 SMD LED	2835 SMD LED
LED Brand	Samsung/Osram	Samsung/Osram

LED Module: Rigid Board

	LM2835R56024P14 	LM2835R56051P21 	LM2835R56068P27 
Size	560*24*5mm	560*51.5*5mm	560*68.5*5mm
Power	14W	21W	27W
Light Output	1980lm	2950lm	3900lm
CRI	80+/90+	80+/90+	80+/90+
Color temperature	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k
LED Brand	Samsung/Osram	Samsung/Osram	Samsung/Osram

LED Module: Flexible PCB

	LM2835F500012P14 	LM2835F250024P28 	LM2835F250051P34 
Size	5000*12*1.2mm	2500*24*1.2mm	2500*51.5*1.2mm
Power/meter	14W	28W	34W
Light Output/meter	1190lm	2380lm	2890lm
CRI	80+/90+	80+/90+	80+/90+
Color temperature	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k	2700k/3000k/4000k/5700k
Voltage input	DC24V	DC24V	DC24V
Cutting unit	100mm	100mm	100mm
LED Brand	Samsung/Osram	Samsung/Osram	Samsung/Osram

Constant Voltage Driver

				
Input Voltage(V)	220V-240V	220-240V	220-240V	220V-240V
Output Voltage(V)	24V	24V	24V	24V
Output Current(mA)	0-1.25A	0-2.5A	0-3.3A	0-8.3A
Power Max	30W	60W	80W	200W
Efficiency	88%	88%	88%	88%
Power Factor	≥0.95	≥0.95	≥0.95	≥0.95
Size (mm)	210x30x21	280x30x21	280x30x21	360x37x30

Constant Current Driver-Osram

				
Voltage input	220-240VAC	220-240VAC	220-240VAC	220-240VAC
Voltage output	23-51VDC	23-51VDC	23-54VDC	23-54VDC
Current output	200mA/250mA/300mA/350mA	500mA/600mA/700mA/800mA	900mA/1050mA/1100mA/1200mA	1300mA/1400mA/1500mA/1600mA
Power Max	17.8W	40.8W	64.8W	75.2W
Efficacy	84%	85%	87%	87%
PF	0.98	0.98	0.98	0.98
Size	210×30×21	210×30×21	210×30×21	210×30×21

Constant Current Driver-Philips

	36W Non-dimmable 	75W Non-dimmable 	36W DALI 	75W DALI 
Part Number	Xitanium 36W/0.3-1A, 54V, 230V	Xitanium 75W/0.7-2A, 54V 230V	Xitanium 36W 0.3-1A, 54V TD 230V	Xitanium 75W 0.7-2A, 54V TD 230V
Size (mm)	360x30x21	360x30x21	360x30x21	360*30*21
Input Voltage(V)	202-254V	202-254V	202-254V	202-254V
Power Factor	≥0.9	≥0.9	≥0.9	≥0.9
Output Current(mA)	300-1000	700-2000	300-1000	700-2000
Output Voltage(V)	27-54V	27-54V	27-54V	27-54V
Output Power Range(W)	11-37	21-75	11-37	21-75
Maximum Power(W)	36	75	36	75



Tel: 86-757-25560988

0757-25668696(国内销售)

E-mail: sales@led-luz.com

ledluz88@gmail.com

Website: www.led-luz.com

www.ledluzprofile.com

Add: Floor 3-5, Building 14, Jilong Industrial Park, Longyan, Leliu,
Shunde District, Foshan, Guangdong, 528322 China